
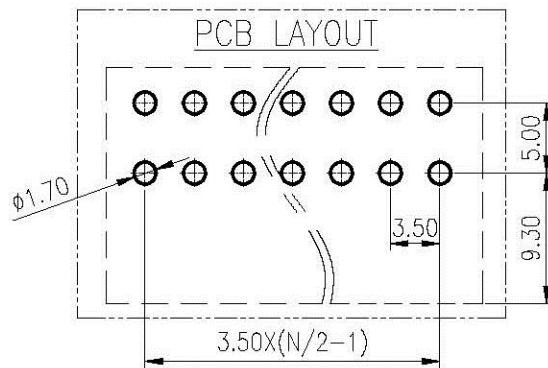
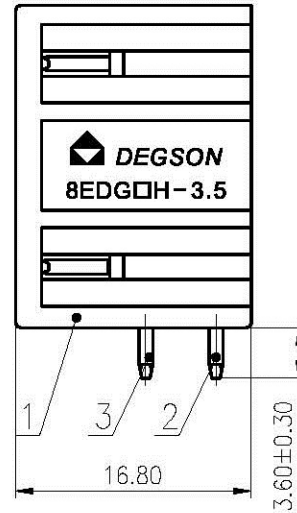
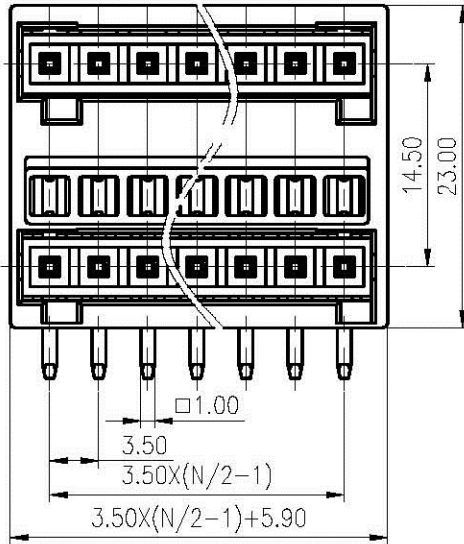
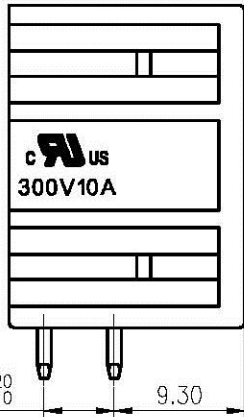
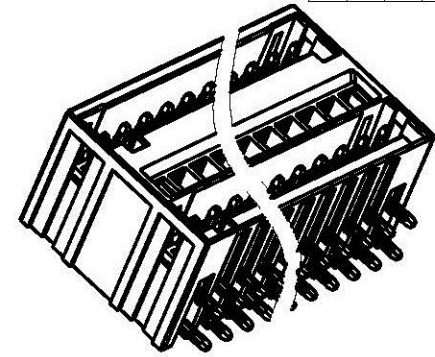


Pitch range in mm		Nominal dimension range in mm				Tolerance		
TO	Over	Over	Over	Over	Over	Over	0.1/10	
6	TO	TO	TO	TO	TO	TO	≤	
	10	24	30	60	100	150		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

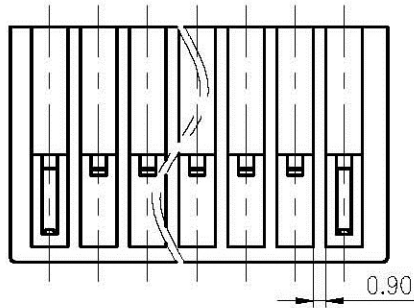

3	Pin 1	Copper	Sn Plated	
2	Pin 1	Copper	Sn Plated	
1	Housing	PA66	UL94 V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)		300/10	/	/
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/3
额定电压/电压/Rated Voltage(V)/Current(A)		/	/	250/10
额定脉冲电压(kV)/Rate Impulse Voltage(kV)		/	/	2.5
间距/Pitch(mm)/线数范围/Poles		3.50/N=04~48P		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

MATERIAL: /	SURFACE: /		
MAT NO.: Series 8EDGRH-3.5	宁波高松电子有限公司 Ningbo Degson Electrical Co., Ltd.		
STATUS: Valid			
APPD:	NAME: 8EDGRH-3.5-XXP-11-01A(H)		
CHKD:	DRAWING NO.: 8EDGRH-3.5-E02		
DRFT: Zhuwm 2008.11.26	REV	TO	
④	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE