

## Description

The input voltage range of A5-120W is 90-264Vac, and the output current is adjustable. This series is specially designed for explosion-proof lamps and high bay lamps. Support 0-10V/PWM/resistor dimming, support dim to off. With high efficiency and simple metal shell design, it has excellent heat dissipation performance, which effectively improves product reliability and extends life. In order to ensure trouble-free operation, this series has lightning protection, output overvoltage protection, short circuit protection and over temperature protection to ensure high product reliability.



## Product Features

- input voltage: 90~264Vac;
- Design: isolated constant current;
- Dimming: 0-10V/PWM/resistor, dim to off;
- Current adjustment: via potentiometer;
- Auxiliary output: 12V/0.2A;
- Protection: SCP, OVP, OTP;
- High surge protection: DM 4KV, CM 6KV;
- IP65;
- Warranty: 5 years

## Application

Explosion-proof lighting

Industrial lighting

## Models

Model	Vin (Vac)	Pout Max (W)	Vout(V)	Iout adjustable range(A)	Default Current(A)	Eff. (Typ.)	PF(Typ.)	THD
A5-120M058A12	100-240Vac	120	30-58	1.80~2.60	2.10A	91%	0.97	8%

### Note:

[1].All specifications are measured at 25°C ambient temperature, input voltage 230Vac, and the typical value tested at full load, if no specific note.

## Input Specifications

Parameter	Min	Typ.	Max	Notes
Input Voltage Range	90Vac	-	264Vac	
Rated Input Voltage	100Vac	-	240Vac	Refer to Output Power vs. Input Voltage curve
Input Frequency AC	47Hz	50/60Hz	63Hz	
Max Input Current	-	-	1.6A	120Vac&100%load
Max Input Power	-	-	145W	120Vac&100%load
Leakage Current	-	-	0.75mA	240Vac/60Hz
Inrush Current	-	-	60A	220Vac
Standby Power Consumption	-	-	0.5W	220Vac, dim to off
Power Factor (PF)	0.98	0.99	-	120Vac, 50-60Hz, 70%-100%load
Power Factor (PF)	0.94	0.97	-	220Vac, 50-60Hz, 70%-100%load
Total Harmonic Distortion (THD)	-	8%	15%	120-240Vac, 50-60Hz, 70%-100%load(without auxiliary supply)
Driver QTY available for circuit breaker(B16)	-	10	-	220Vac

## Output Specifications

Parameter	Min	Typ.	Max	Notes
Output Voltage Range	30Vdc	-	58Vdccc	
Open Circuit Voltage	-	-	80Vdc	
Output Current Range	1.80A	-	2.60A	adjustable via potentiometer
Full Power Current Range	2.10A	-	2.60A	$P=U_o \cdot I_o$ within this range
Current Accuracy	-5%	-	+5%	
Total Output Current Ripple (pk-pk)	-	5%	10%	20MHz BW, 100%20MHz BW full load&LED load the LED load ripple is slightly different for different leds
Startup Overshoot Current	-	-	10%	120~240Vac & 100%load&LED
Auxiliary Output Voltage	10.8V	12V	13.8V	
Auxiliary Output Current		-	200mA	
Line Regulation	-2%	-	+2%	25°C±10°C ambient temperature, input varies from 120Vac to 240Vac
Load Regulation	-3%	-	+3%	Load varies from 70% to 100% with 220Vac Input at 25°C±10°C ambient temperature
Turn-on Delay Time	-	-	1.0S	120~240Vac, 90~100%load

## General Specification

parameter	Min	Typ.	Max	Notes
Efficiency@120Vac Io=2.10A	87%	89%	-	100%load, 25°C Ta, without auxiliary power supply
Efficiency@220Vac Io=2.10A	89%	91%	-	100%load, 25°C Ta, without auxiliary power supply
Mean Time Between Failure	-	200Khours	-	25°C±10°C Ta, 220Vac,80%load (MIL-HDBK-217F/SR-332)
Lifetime	-	50Khours	-	230Vac&100%load, Tc 75°C, refer to lifetime vs. case temperature curve
Operating Temperature Ta	-40°C	-	+55°C	Output Power vs. Ambient Temperature curve
Operating Tc for Safety Tc_s	-40°C	-	+90°C	
Operating Tc for Warranty Tc_w	-40°C	-	+75°C	5-year warranty shell temperature, humidity:10% to 95% RH
Storage Temperature Ta	-40°C	-	+85°C	Humidity:5% to 100% RH
Altitude	-60m	-	4000m	
Over Temperature Protection Tc	90°C	95°C	100°C	Decreases power(45-55%), returning to normal after over temperature is removed.
Short Circuit Protection				Hiccup mode, when the short circuit condition is relieved, the product will automatically return to normal.
Output Over Voltage Protection				When exceeds the limited range, it enters protection mode. When the fault is removed, the product will automatically return to normal.
Dimensions (Ø*H)	112*38mm			
Net Weight	630±40g/PCS			
Package (L*W*H)	L380xW315xH265mm; 28PCS/CTN			

## Dimming

Parameter	Min	Typ.	Max	Notes
0~10V Maximum Voltage	-	10V	15V	
Source Current on Vdim (+)Pin 电	-	100uA	200uA	
Dimming Range	10% I <sub>max</sub>	-	100% I <sub>set</sub>	Iset is the Iout adjustable range
Suggest Dimming Input 0-10V	0V	-	10V	
Turn-on Voltage	0.9V	-	1.3V	
Turn-off Voltage	0.7V	-	0.9V	
PWM in High Level	9.7V	-	10.3V	
PWM in Low Level	0V	-	0.3V	
PWM in Frequency Range	1KHz	-	2KHz	
PWM in Duty Cycle	0%	-	100%	
Turn-on Duty Cycle	10%	-	13%	
Turn-Off Duty Cycle	7%	-	10%	
Resistor dimming	-	-	100KΩ	

## Safety Specifications

Parameter	Min	Typ.	Max	Notes
Dielectric Strength (Output-Ground)	-	3750Vac	-	60S, Current not exceeding 5mA
Dielectric Strength (Input-Dimming)	-	1875Vac	-	60S, Current not exceeding 5mA
Dielectric Strength (Dimming-Ground)	-	500Vac	-	60S, Current not exceeding 5mA
Grounding Resistance	-	3750Vac	-	60S, Current not exceeding 5mA
Insulation Resistance	-	500Vac	-	60S, Current not exceeding 5mA
Dielectric Strength (Output-Ground)	-	-	0.1Ω	25°C±10°C Ambient Temperature, pass 25A Current, 60s.
Dielectric Strength (Input-Dimming)	50MΩ	-	-	Input-Output, Input-PE, Output-PE, 500Vdc/60s/25°C

## Safety Compliance

Safety Category	Standards	Approved	Notes
CCC	GB19510.1,GB19510.14	√	
CE	EN61347-1,EN61347-2-13	√	
CE	EN62493		
CB	IEC61347-1, IEC61347-2-13		
ENEC	EN62384		
BIS	IS 15885(PART 2/SEC 13)		
UL	UL 8750		
CUL	CSA C22.2 No.250.13		
KC	K61347-1, K61347-2-13		
PSE	J61347-1, J61347-2-13		
SAA	AS/NZS IEC 61347.2.13		
SAA	AS/NZS 61347.1		


## EMC Compliance

EMC Category	Standards	Approved	Notes
CCC	GB/T 17743, GB 17625.1	√	
CE	EN 55015	√	
CE	EN 61000-3-2, EN 61000-3-3	√	
CE	EN61000-4-2,3,4,5,6,11		
CE	EN 61547		
KC	K61547		
KC	K00015		
PSE	J55015		
FCC	FCC part 15		
Surge Shock Immunity Ringing Wave	ANSI/C82.77-5-2017		

## RoHS


Our products comply with RoHS Directive 2011/65/EU and latest revised directive (EU) 2015/863.

### Inrush Current

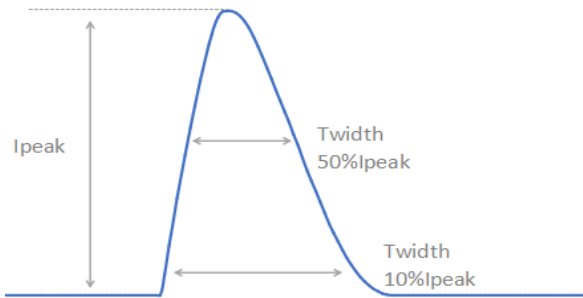


$V_{in}$	$I_{peak}$	$T(@10\% \text{ of } I_{peak})$	$T(@50\% \text{ of } I_{peak})$
220Vac	55A	578 $\mu$ s	236 $\mu$ s

### Output Voltage vs. Output Current

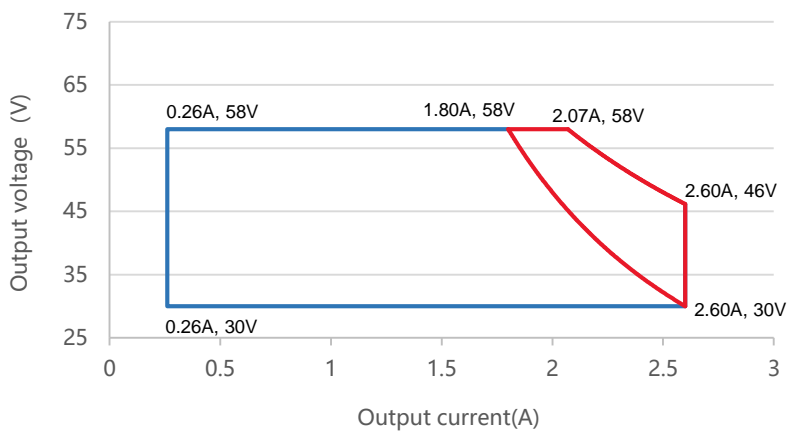


Red curve: good performance area


### Output Power vs. Input Voltage

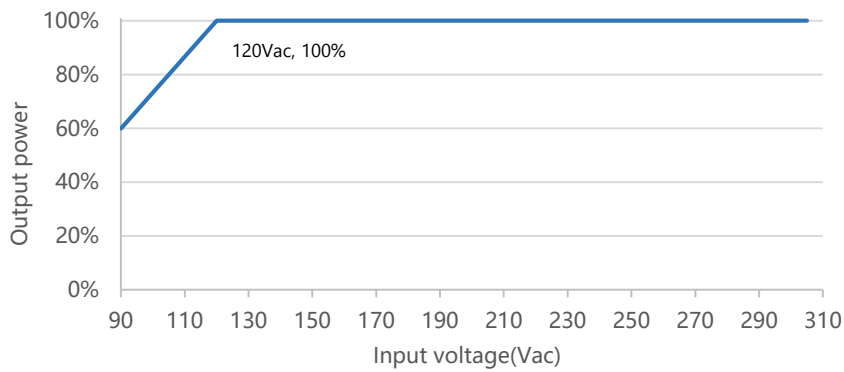


**Efficiency vs. Load(Io=2.10A)**

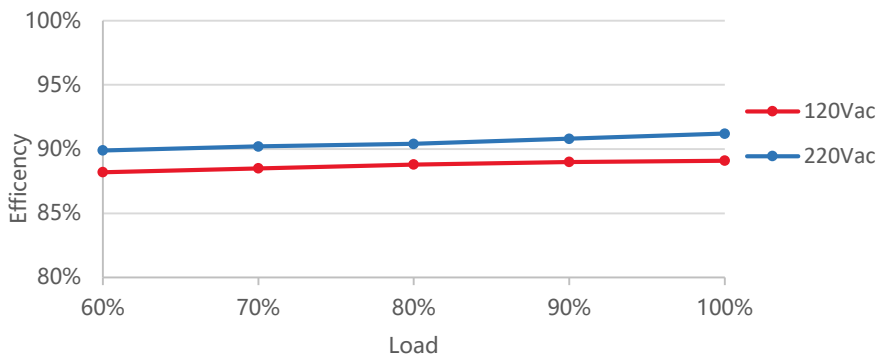


**Efficiency vs. Load(Io=2.60A)**

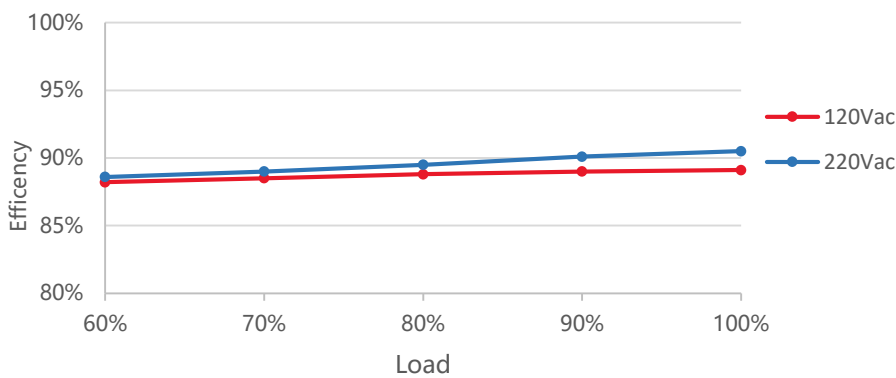


**PF VS LOAD**

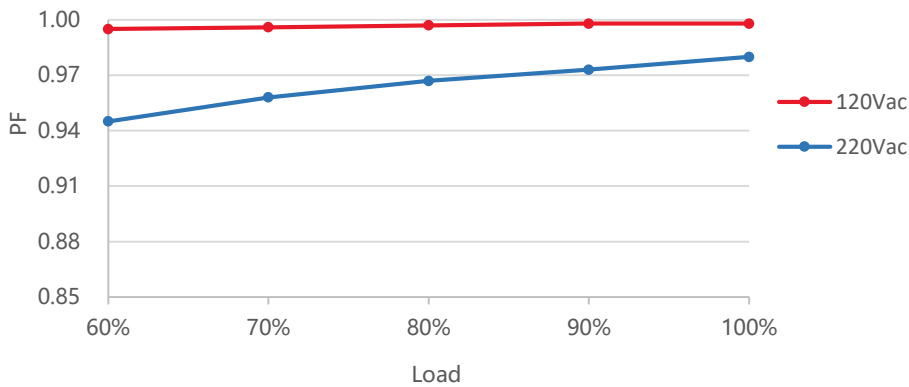


**THD vs. Load**

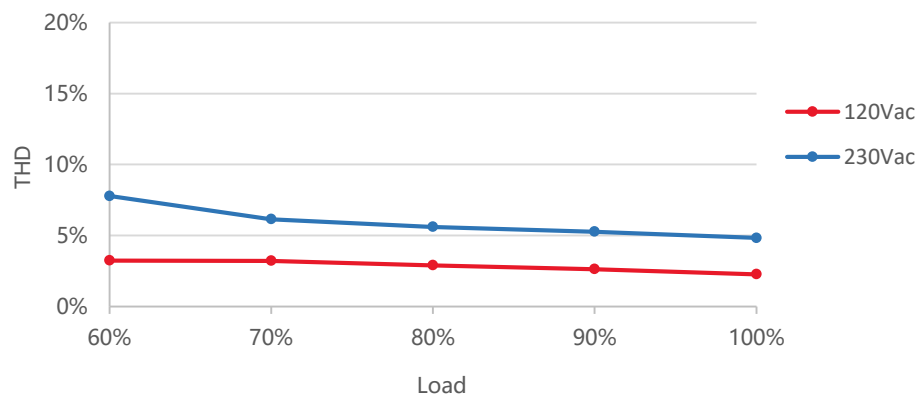


### Output Power vs. Ambient Temperature

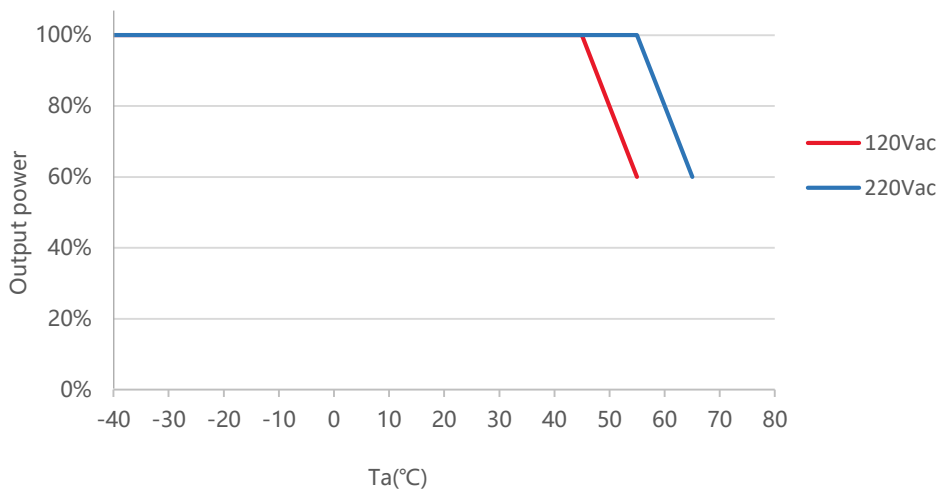


### Lifetime vs. Case Temperature

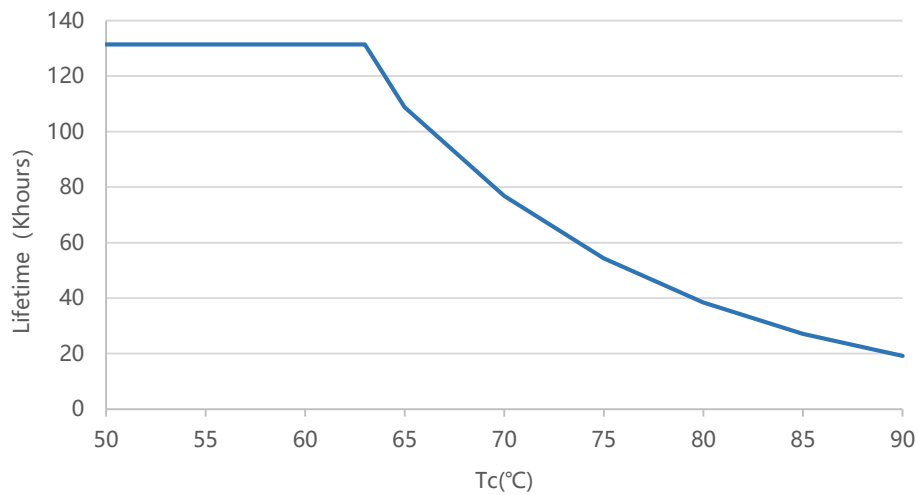

### 0-10V/PWM Dimming

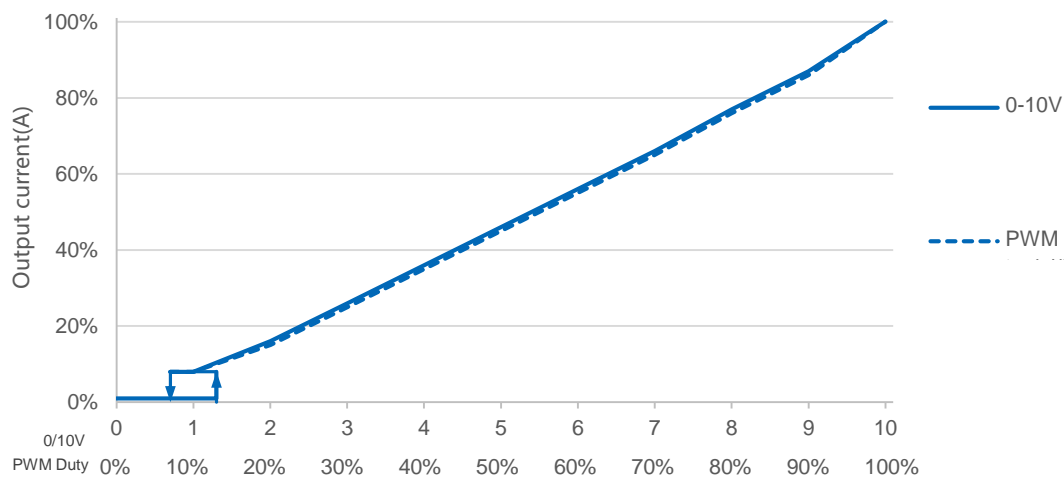

## Mechanical Outline

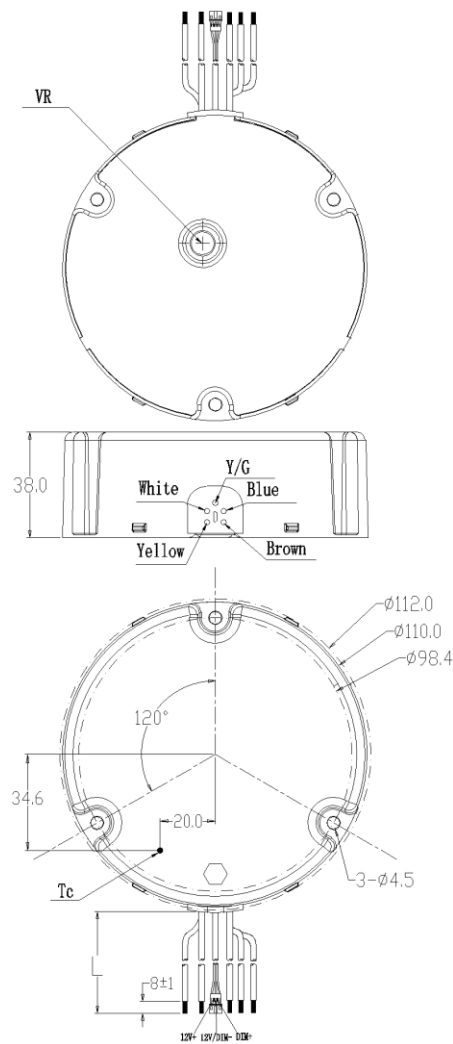

## Specification

<b>Input L wire</b>	UL3398 18AWG L=180±20mm brown	
<b>Input N wire</b>	UL3398 18AWG L=180±20mm blue	
<b>Input ground wire</b>	UL3239 18AWG L=180±20mm yellow-green	
<b>Output LED+</b>	UL3239 18AWG L=180±20mm white	
<b>Output LED-</b>	UL3239 18AWG L=180±20mm yellow	
<b>Dimming</b>	UL2468 L=180±20mm with male terminal	

**Version**

A.1	First release	