




Recommended P.C.B. Layout  
PCB Tolerance: ±0.05 (Top View)

**SPECIFICATION**  
 Current Rating: 3 Amp  
 Withstand Voltage: 1000V AC  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 1000 Megaohms Min.  
 Operation Temperature: -40°C ~ +105°C  
 Insulator: PBT (UL94V-0)  
 Contact: Brass, Gold Flash Over Nickel  
 RoHS Compliant

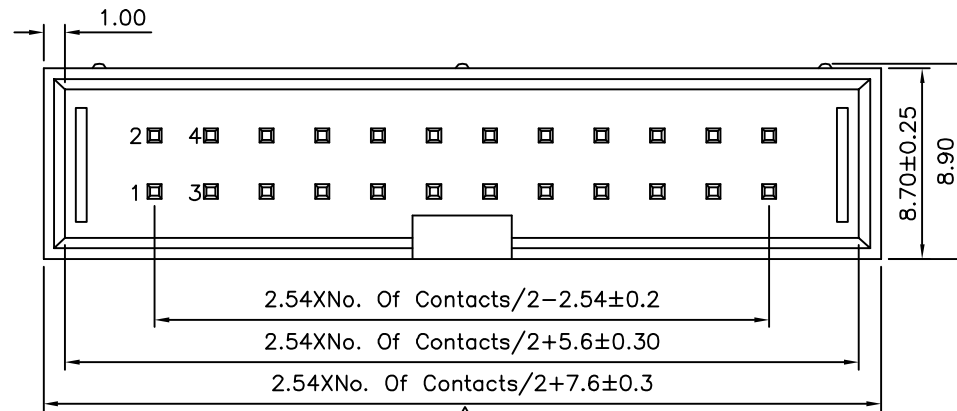

$\triangle/\triangle/\triangle$  BD XX - XX - H  
 (1) (2) (3) (4)

- (1) BD: 2.54mm Box Header DIP Straight
- (2) XX: No. Of Position
- (3) XX: Insulator Color  
Blank: Black  
GE: Gray
- (4) H: RoHS Compliant

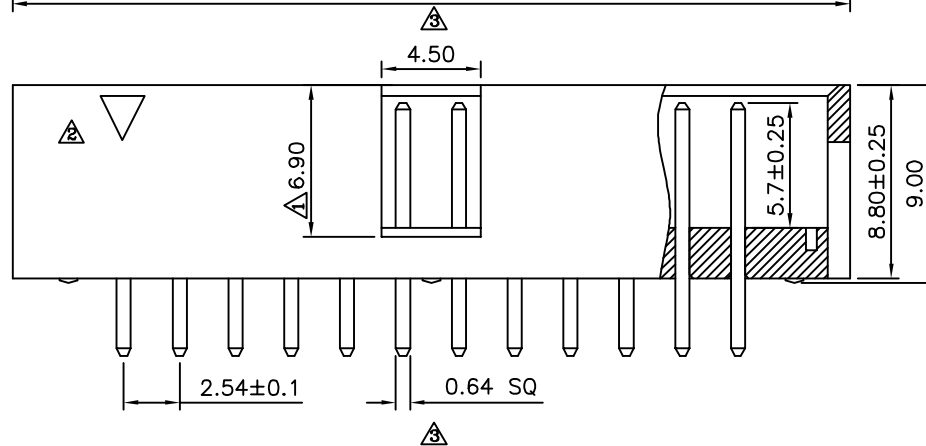

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY	
PART No. $\triangle$ BDXX-XX-H		EMILY	
DRAWING No. $\triangle$ BDXX-XX-H		CHECKED BY HZF	
SCALE NONE		DRAWING BY HAO	
REV.	A3	UNIT mm	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
$\triangle$ X.	±0.25	X.*	±0.5*
$\triangle$ .X	±0.20	.X*	±0.1*
$\triangle$ .XX	±0.15	.XX*	±0.05*
$\triangle$ .XXX	±0.10		
NO.	REV.	REVISIONS	CHK DATE
$\triangle$ A3		Modify Data	HZF 04/17/2015
$\triangle$ A2		Modify P/N: BDXX-H -->BDXX-XX-H	HZF 11/20/2013
$\triangle$ A1		Modify Data	HZF 09/03/2013
$\triangle$ A0		NEW RELEASE	HZF 12/14/2010