



CC15W200-350CG Triac/CC15W400-550CG Triac/CC15W500-700CG Triac



Constant Current & Dimmable Driver

**Model: CC15W200-350CG Triac
CC15W400-550CG Triac
CC15W500-700CG Triac**



Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Voltage	No load Voltage
CC15W200-350CG Triac	200mA	0.08A	14W	5.2-8.4W	0.92	81%	26-42V	55V
	250mA	0.08A	16W	6.5-10.5W	0.92	81%	26-42V	55V
	300mA	0.1A	18W	7.8-12.6W	0.92	83%	26-42V	55V
	350mA	0.1A	22W	9.1-14.7W	0.92	83%	26-42V	55V
CC15W400-550CG Triac	400mA	0.08A	14W	6.4-11.6W	0.92	80%	16-29V	43V
	450mA	0.08A	16W	7.2-13W	0.92	80%	16-29V	43V
	500mA	0.1A	18W	8-14.5W	0.92	81%	16-29V	43V
	550mA	0.1A	22W	8.8-15.9W	0.92	81%	16-29V	43V
CC15W500-700CG Triac	500mA	0.08A	14W	6-10W	0.92	80%	12-20V	35V
	550mA	0.08A	16W	5.5-11W	0.92	80%	12-20V	35V
	600mA	0.1A	18W	7.2-12W	0.92	81%	12-20V	35V
	700mA	0.1A	22W	8.4-14W	0.92	81%	12-20V	35V

Test result @230V, 50Hz, Full Load.

1. Parameters

category	Item	Technical Norm
Features	Output Type	Constant Current
	Dimming Type	Phase dimming
	Dimming Range	10%-100%
	IP Grade	IP20
	Insulation Class	Class II
Input	Rated Input Voltage	220-240VAC_stable
	Range of Input Voltage	198-264VAC_stable or 180-280VDC_stable
	Frequency	50/60Hz
	Input Current	≤0.1A
	Input Power	≤22W
	Power Factor	≥0.92 (230VAC,full load)

KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid



CC15W200-350CG Triac/CC15W400-550CG Triac/CC15W500-700CG Triac

	THD	≤15%
	No-load Power Consumption	≤0.5W @230VAC
	Inrush Current	≤10A/13.5us (230VAC,full load)
	Connected quantity of 16A Breaker :	60pcs/type B ; 96pcs/type C
Output Voltage	CC15W200-350CG Triac	26-42V
	CC15W400-550CG Triac	16-29V
	CC15W500-700CG Triac	12-20V
Output Current	CC15W200-350CG Triac	200mA/250mA/300mA/350mA
	CC15W400-550CG Triac	400mA/450mA/500mA/550mA
	CC15W500-700CG Triac	500mA/550mA/600mA/700mA
No Load Voltage	CC15W200-350CG Triac	55VDC Max.
	CC15W400-550CG Triac	43VDC Max.
	CC15W500-700CG Triac	35VDC Max.
Output	Max. Output Power	15.9W
	Efficiency	≥81%
	Current Ripple	±5% (Imax-Imin)/(Imax+Imin)
	Current Accuracy	±5%
	Started Delay Time (<120Hz)	≤0.5S (230VAC,full load)
	Pst LM	≤1
	SVM	≤0.4
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	No-load Protection	Auto Recovery
	Insulation voltage	I/P to O/P , 3.75KVac/1min
	Ta/Operation Temperature	-20....+50℃
Environment	Ts/Storage Temperature	-40....+85℃
	Tc/Enclosure Temperature	85℃
	Humidity	10%....90%RH
	Atmosphere	86-108KPa
	Connection Method	Push-in Terminal
Construction	Installation	Independent & Built in
	PRI Wire preparation	0.75-1.5 [□]
	SEC Wire preparation	0.5-1.5 [□]
	Dimension	Independent:122*41*23mm (L*W*H) Built in:88*41*23mm(L*W*H)
	Certification	complied to CE ENEC SAA
Standards	Safety Standards	EN61347-1:2015, EN61347-2-13:2014/A1:2017 EN62384:2006/A1:2009 , AS61347.2.13:2018, AS/NZS61347.1:2016 Inc A1
	EMC Standards	EN IEC55015:2019, EN IEC55015:2019/A11:2019,



CC15W200-350CG Triac/CC15W400-550CG Triac/CC15W500-700CG Triac

		EN IEC61000-3-2:2019, EN 61000-3-3:2013/A1:2019,EN61547:2009
	Performance	EN62384
	Surge	L-N/1KV
	RoHS	complied to 2011/65/EU
Others	Life Time	50000h @50°C (Ta) / 85°C (Tc)
	Warranty	5years , F.R. < 10000ppm
	Noise	15cm <28dB

Remark: 1. Specific instructions are not all parameters are not connect dimmer input voltage 230 vac / 50 Hz and 25 °C ambient temperature measured.

2. LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.

3. trailing edge dimmable.

2. Trailing Edge Dimmer list approved by KGP

Manufacturer	Model	Q'ty of parallel connection
ABB	6519 U	12
ABB	6526 U	11
JUNG	1224 LED UDE	12
Berker	2861	12
JUNG	254 UDIE 1	13
JUNG	225 TDE	12
EGANT	U321V2	12
Schneider	SBD200LED	13
Schneider	SBD315RC	12
Berker	2874	13
Eetako	EUD61NP-230V	12
Eetako	DTD55L-230Vwg	10
GIRA	Universal-LED-Dimmer Mini2440 00	10
EHMANN	LED-Dimmer T46.08	10
JUNG	DrehDimmer Unlversal LED1731DD	10

Leading Edge Dimmer list only on request -/ or confirmed by KGP Electronics

3. Label

KGP LED Dimmable Driver 
 KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid
CC15W200-350CG Triac Constant current Type 
 $U_N = 220-240Vac$ 50/60Hz $\lambda: \geq 0.92C$ PRI 0. 75-1. 5 
 Uout=Max.55Vdc SELV For LED modules only SECO. 5-1. 5 

N	PRI	PIN1	PIN2	Io (mA)	Po (W)	Uout(V)	In (A)
L	OFF	OFF	200	8.4	26-42	0.08	0.1
OFF	ON	250	10.5				
ON	OFF	300	12.6				
ON	ON	350	14.7				

ta=-20°C - +50°C tc=85°C



KGP LED Dimmable Driver 
 KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid
CC15W400-550CG Triac Constant current Type 
 $U_N = 220-240Vac$ 50/60Hz $\lambda: \geq 0.92C$ PRI 0. 75-1. 5 
 Uout=Max.43Vdc SELV For LED modules only SECO. 5-1. 5 

N	PRI	PIN1	PIN2	Io (mA)	Po (W)	Uout(V)	In (A)
L	OFF	OFF	400	11.6	16-29	0.08	0.1
OFF	ON	450	13				
ON	OFF	500	14.5				
ON	ON	550	15.9				

ta=-20°C - +50°C tc=85°C




KGP LED Dimmable Driver 
 KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid
CC15W500-700CG Triac Constant current Type 
 $U_N = 220-240Vac$ 50/60Hz $\lambda: \geq 0.92C$ PRI 0. 75-1. 5 
 Uout=Max.35Vdc SELV For LED modules only SECO. 5-1. 5 

N	PRI	PIN1	PIN2	Io (mA)	Po (W)	Uout(V)	In (A)
L	OFF	OFF	500	10	12-20	0.08	0.1
OFF	ON	550	11				
ON	OFF	600	12				
ON	ON	700	14				


ta=-20°C - +50°C tc=85°C



4. Dimming curve

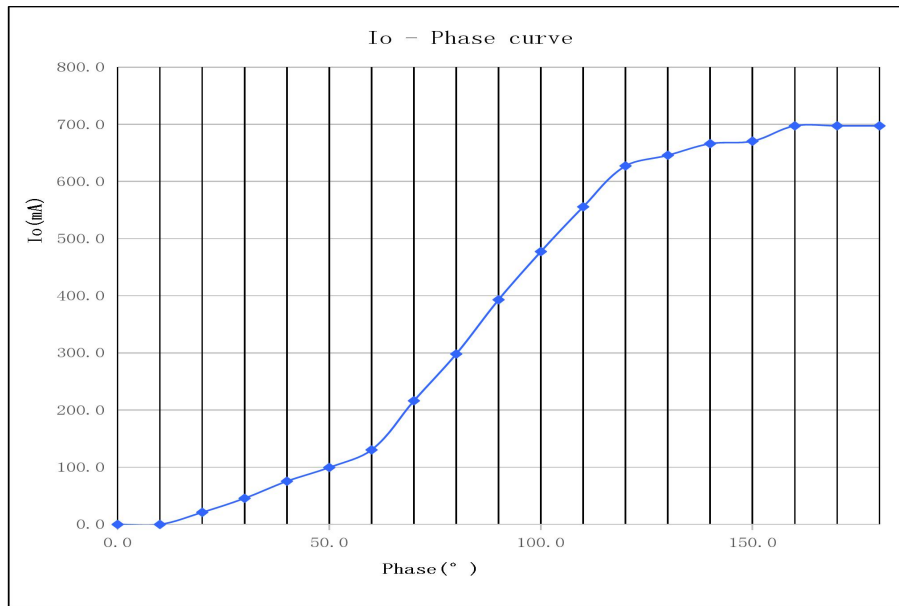


5. Lifetime curve

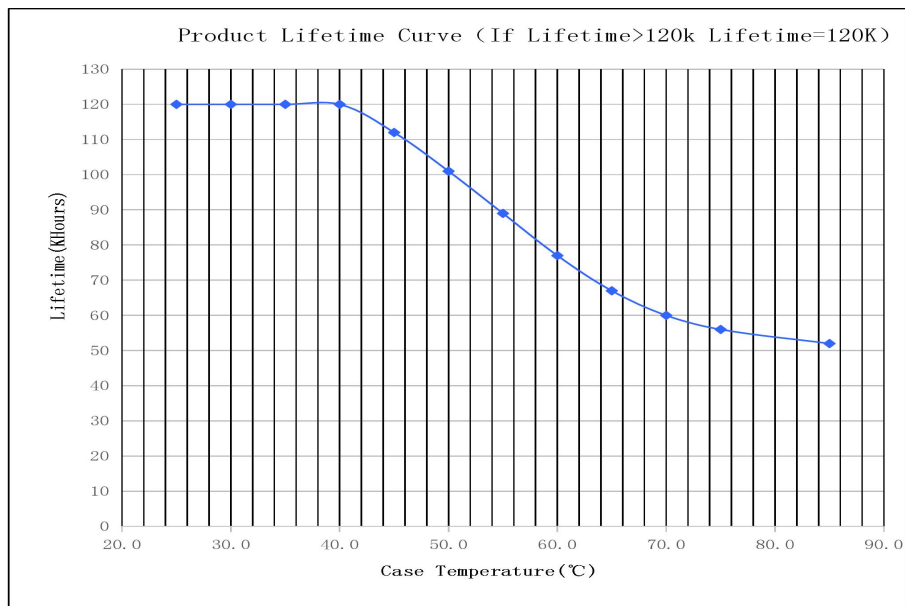


6. Dimension (Unit: mm)

Independent type:

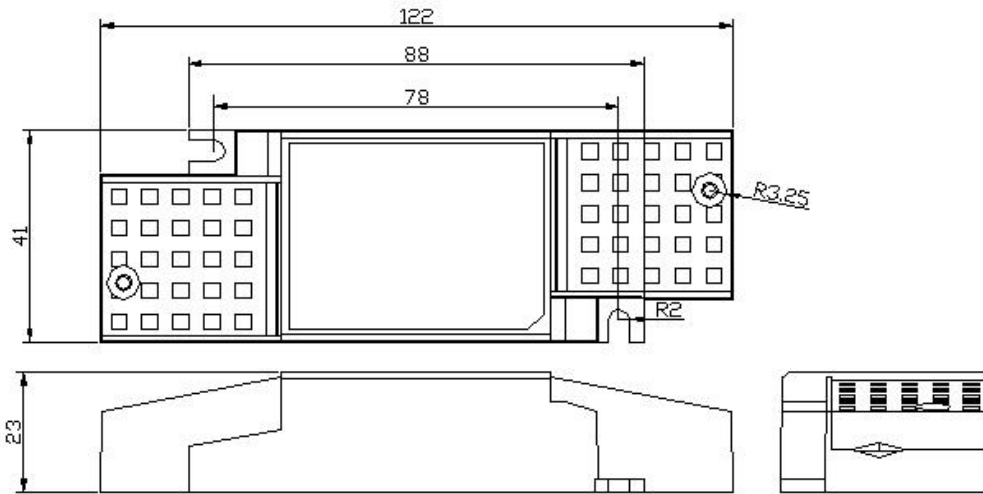

Built in type:

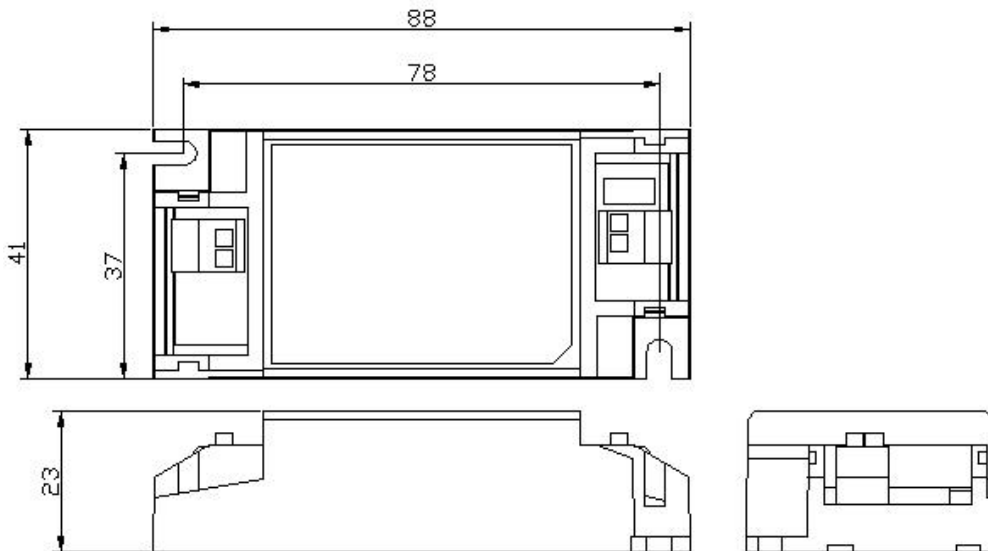


7. Packing information


Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
450*240*200	90	0.079	7.11	8.9

8. Wiring Diagram

Independent type:

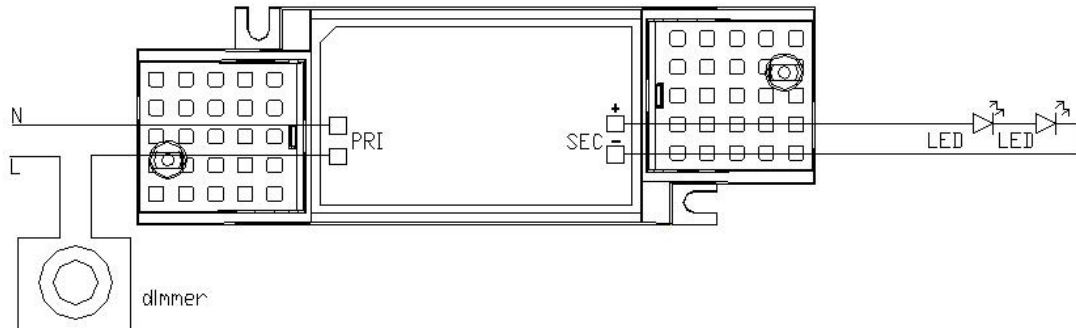

Built in type:

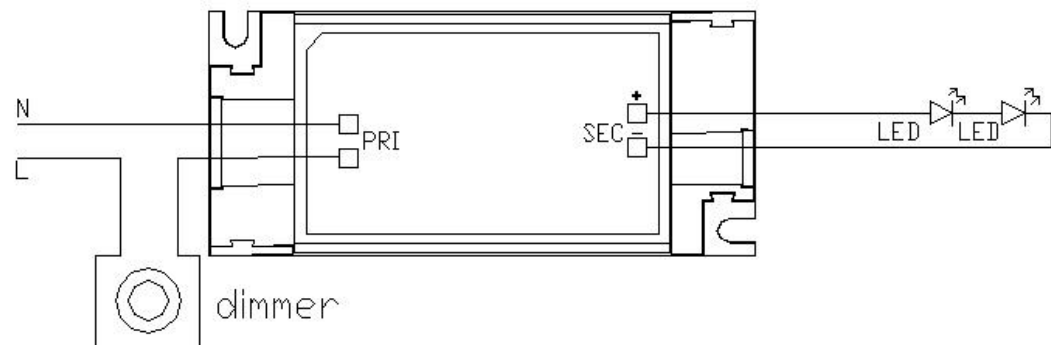

9. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)