

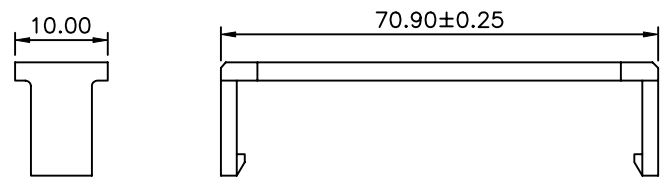
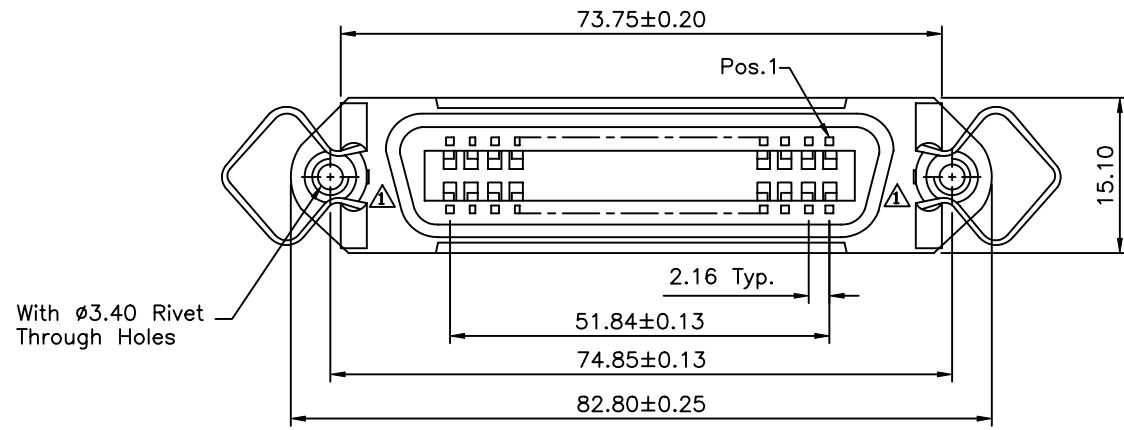


△ SPECIFICATION


Current Rating:1A:AWG28/1,2A:AWG26
 Dielectric Withstanding Voltage:500V At Sea Level
 Contact Resistance:25 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-25°C To +85°C(Limited By Cable)
 Insulator:PBT&G/F Reinforced(UL94V-0),Blue
 Contact:Phosphor Bronze,Selective Gold Flash Over Nickel
 Strain Relief:PBT&G/F Reinforced(UL94V-0),Blue
 Shell:Steel
 Wire Size:AWG26&AWG28 Stranded,1.27mm Conductor Center Flat Cable
 RoHS Compliant

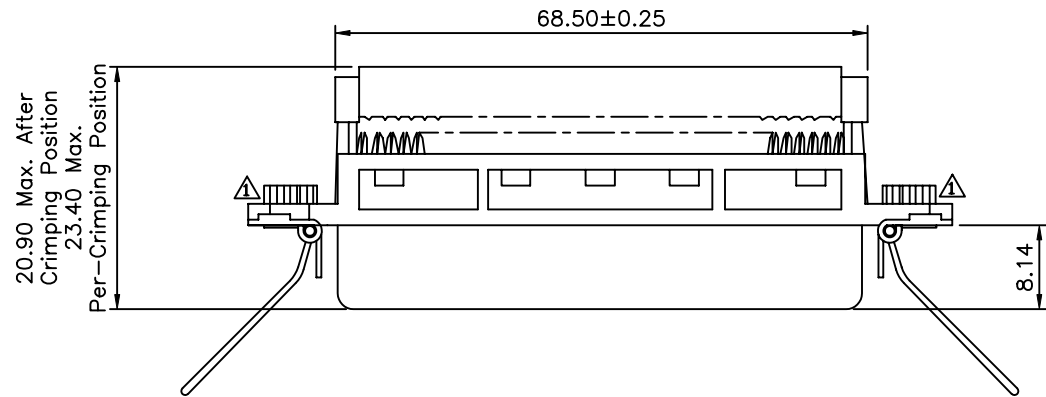

Plastic Strain Relief

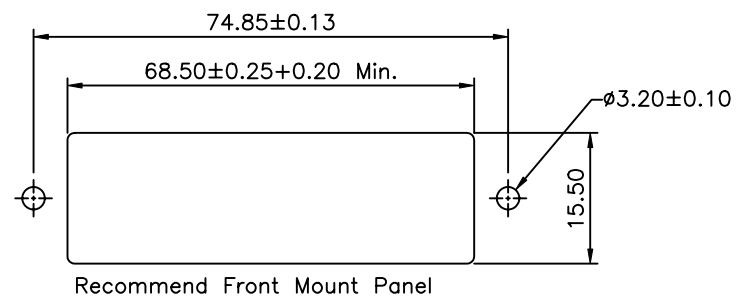

Recommend Front Mount Panel

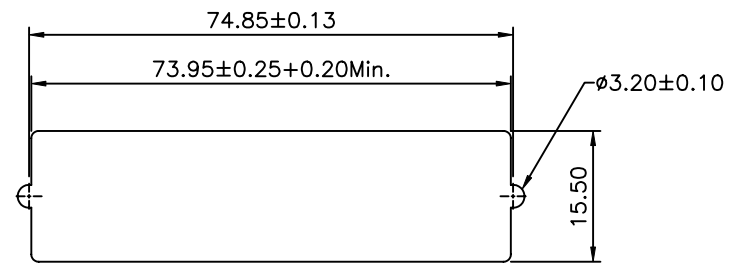

Recommend Rear Mount Panel

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
PART No. CFM50S-H		MEI		
DRAWING No. CFM50S-H		CHECKED BY HZF		.X ±0.38 .XX ±0.25 ANG ±1°
SCALE NONE		DRAWING BY XYH		
REV.	A1	UNIT mm	NO. REV.	

A1		Modify Data	HZF	08/22/2009
A0		NEW RELEASE		
NO. REV.	REVISIONS		CHK	DATE