

REV.	MODIFY DESCRIPTION	DRAWING
A0	INITIAL ISSUE	TANG 2016/09/26
A1	MODIFY SOLDERING TAIL	TANG 2017/09/16


DESCRIPTION:
HOUSING: LCP UL94V-0
CONTACT: PHOSPHOR BRONZE, TIN PLATED

TECHNICAL PARAMETERS:


	UL1977
RATED VOLTAGE :	300V
RATED CURRENT :	2A
REFLOW SOLDERING TEMPERATURE :	260℃

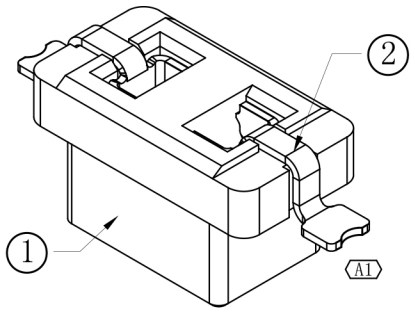


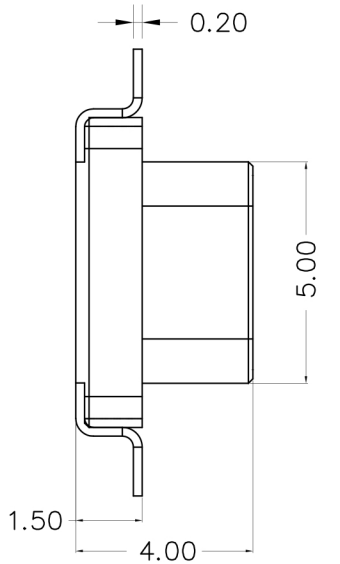

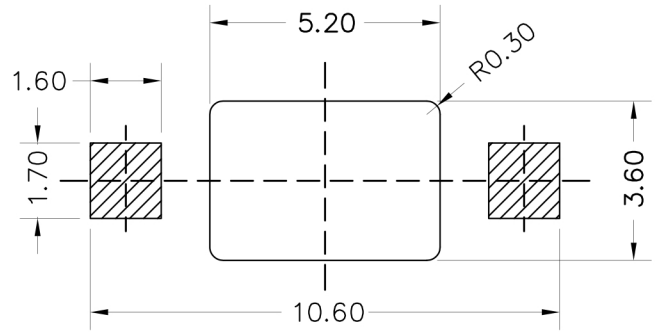

PCB LAYOUT
TOLERANCE: ±0.05



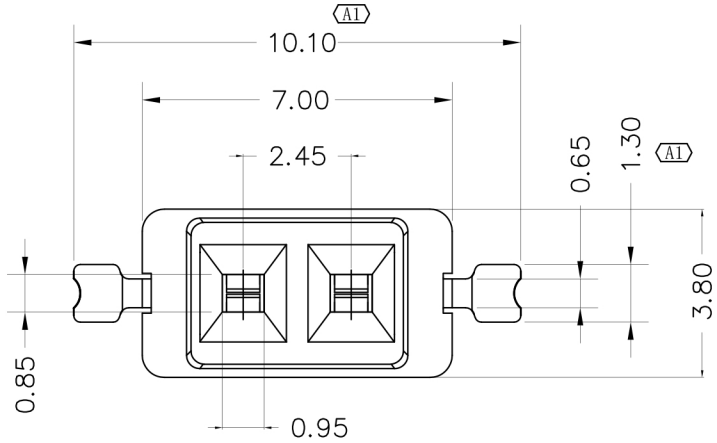

NO.	DESCRIPTION	Q'TY
②	CONTACT	2
①	HOUSING	1

NO DIMENSION TOLERANCE			PROJECTION TYPE	UNIT	mm	DWG.	TANG 2017/09/16	PART NO.	CM-2028-1-2PYN
X. ±0.35	X.XX ±0.20	X.X° ±5°		SCALE	1:1	CHK.		PART NAME	SMD TYPE FOR TERMINAL BLOCKS
X.X ±0.25	X.XXX ±0.10	X.XX° ±2°	DWG. NO. G080-2 PAGE 1/1	REV.	A1	APP.			