





1		2		3		4		5		6		7		8	
未注公差/General tolerances(mm)															
>1	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10	
±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.60	±0.80	±0.95	±1.00	±1.20	±1.60	±2.20	±2.50	±2c	

5	6	7	8
符号/SIGN	描述/DESCRIPTION	修订者/DRAWN	日期/DATE

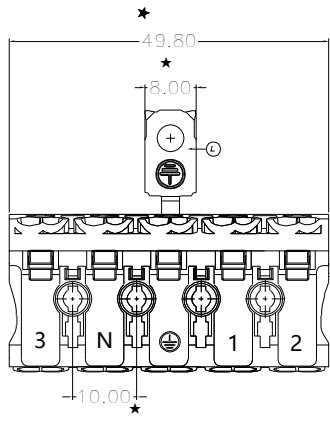

Factory: Xiamen Fucon IMP&EXP CO.,LTD

Part No.: CM-238-D-5P  
 CM-238 - series of push wire connector (electrical terminal block)  
 D - no value  
 5P - number of Pins (5 Pins)

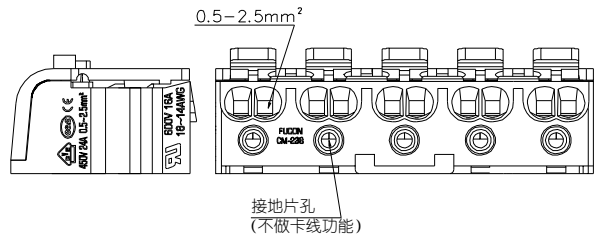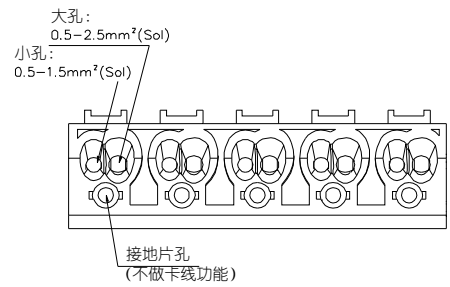

技术参数 Technical parameter:

● 产品标准/Rated Voltage	UL1059	IEC60998	GB13140	IEC60998
● 获得安规及标志 Access to Safety Mark				
● 证书号码/Certificate No	E338959	40041279	CQC190 03226724	AQ5050 33330001
● 额定电压/Rated Voltage	600V	450V	450V	450V
● 额定电流/Rated Current	16A	24A		24A
● 线径范围/Wire range		0.5~2.5mm²	0.5~2.5mm²	0.5~2.5mm²
● 大孔导线/Sol (Line-bigger hole)	18-14	0.5~2.5mm²		
● 小孔导线/Sol (Line-smaller hole)	18-16	0.5~1.5mm²		
● 剥线长度/Wire strip length	8-9mm	8-9mm	8-9mm	8-9mm
● 绝缘耐压/Withstanding Voltage	2200V	2500V	2500V	2500V
● 温度范围/Operating temperature	-40℃~120℃			
● 焊接温度/Soldering temperature	/			
● 关键尺寸/Critical dimension	★			

ITEM 序号	NAME OF PART 部件名称	Material 材料	NOTES 备注	QTY 用量
①	按钮/Button	PC UL94V-0	白色	5
②	端盖/Cover	PA66 UL94V-0	白色	1
③	五金组件/Hardware components	铜+不锈钢/Copper Alloy+SUS301	镍/Ni plated	5
④	主座/Housing	PA66 UL94V-0	白色	1

 APPROVED/审批 CHECKED/核准 DRAWN/制图 	CAT NO./认证型号	CM-238	SHEET: 1/1
	PATE NO./成品料号	02.01.005.0xxx	SCALE: 1:1
	CUST NO./客户料号	/	REV.: A01
	何跃雄 2022.01.15	MODEL: CM-238-D-5P	
胡德权 2022.01.15			
陈燕龙 2022.01.15	DRAWING NO./图号:CM-238-xxx		
SIZE: A4	TYPE/图纸类型:CUSTOMER_DRAWING		