
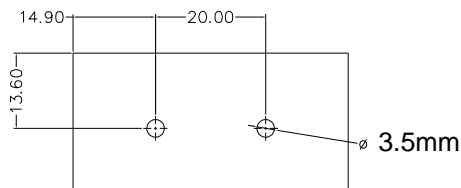
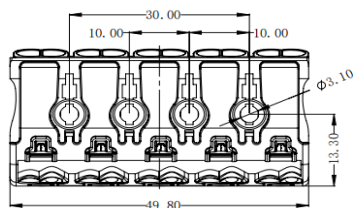
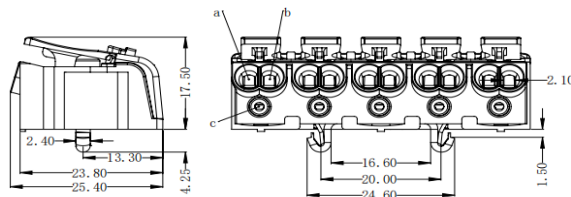
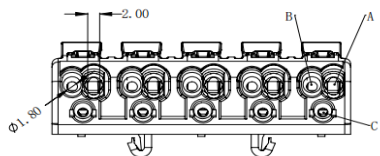
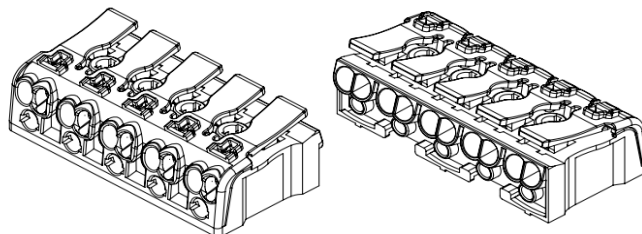


未注公差/General tolerances(mm)														
>0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10 ±2℃	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	>500		
±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.60	±0.80	±0.95	±1.00	±1.20	±1.60	±2.20	±2.50	

6	7	8
符号/SIGN	描述/DESCRIPTION	修订者/DRAWN 日期/DATE



Factory: Xiamen Fucon IMP.&EXP. CO.,LTD

Part No.: CM-238-J-5P
 CM-238 - series of push wire connector (electrical terminal block)
 J - no value
 5P - number of Pins (5 Pins)

技术参数 Technical parameter:

● 产品标准/Rated Voltage	UL1059	IEC60998	GB13140	IEC60998
● 获得安规及标志 Access to Safety Mark				
● 证书号码/Certificate No	E338959	40041279	CQC190 03226724	AQ5050 33330001
● 额定电压/Rated Voltage	600V	450V	450V	450V
● 额定电流/Rated Current	16A	24A		24A
● 线径范围/Wire range		0.5~2.5mm ²	0.5~2.5mm ²	0.5~2.5mm ²
● 大孔导线/Sol (Line-bigger hole)	18-14	0.5~2.5mm ²		
● 小孔导线/Sol (Line-smaller hole)	18-16	0.5~1.5mm ²		
● 剥线长度/Wire strip length	8-9mm	8-9mm	8-9mm	8-9mm
● 绝缘耐压/Withstanding Voltage	2200V	2500V	2500V	2500V
● 温度范围/Operating temperature	-40℃~120℃			
● 焊接温度/Soldering temperature	/			
● 关键尺寸/Critical dimension	★			

ITEM 序号	NAME OF PART 部件名称	Material 材料	NOTES 备注	QTY 用量
④	接地片/Grounding strip	铜/Copper Alloy	镀/Ni plated	1
③	端盖/Cover	尼龙/PA	白色	1
②	五金组件/Hardware components	铜+不锈钢/Copper Alloy+SUS301	镀/Ni plated	5
①	主座/Housing	尼龙/PA	白色	1

 APPROVED/审批 CHECKED/核准 DRAWN/制图	CAT NO./认证型号	CM-238	SHEET: 1/1
	PATE NO./成品料号	02.01.005.0078	SCALE: 1:1
	CUST NO./客户料号	/	REV.: A01
何跃雄	2022.01.15	MODEL:	CM-238-J-5P
胡德权	2022.01.15	DRAWING NO./图号:CM-238-078	
陈燕龙	2022.01.15	TYPE/图纸类型:CUSTOMER_DRAWING	