
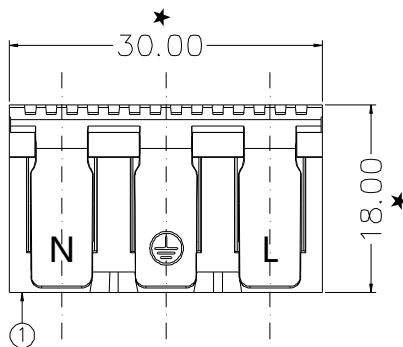



未注公差/General tolerances(mm)														
>0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
~	~	~	~	~	~	~	~	~	~	~	~	~	~	
±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.60	±0.80	±0.95	±1.00	±1.20	±1.60	±2.20	±2.50	

1	2	3	4	5	6	7	8
符号/SIGN	描述/DESCRIPTION					修订者/DRAWN	日期/DATE


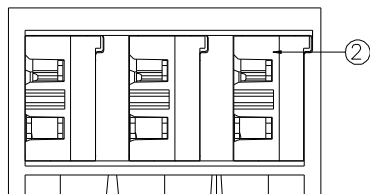


Factory: Xiamen Fucon IMP.&EXP. CO.,LTD

Part No.: CM-240-3P  
**CM-240 - series of push wire connector (electrical terminal block, for soldering on PCB)**  
**3P - number of Pins (3 Pins)**

技术参数 Technical parameter:

● 产品标准/Rated Voltage		IEC60998	
● 获得安规及标志 ● Access to Safety Mark			
● 证书号码/Certificate No		R5050 34840001	
● 额定电压/Rated Voltage		450V	
● 额定电流/Rated Current		24A	
● 线径范围/Wire range		0.5~2.5mm <sup>2</sup>	
● 硬质导线/Solid wire(AWG)			
● 软质导线/Stranded wire(AWG)			
● 剥线长度/Wire strip length		11-12mm	
● 绝缘耐压/Withstanding Voltage		2500V	
● 温度范围/Operating temperature	- 40℃~120℃		
● 焊接温度/Soldering temperature	260℃±5℃/5Sec		
● 关键尺寸/Critical dimension	★		

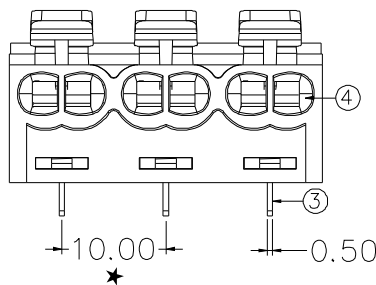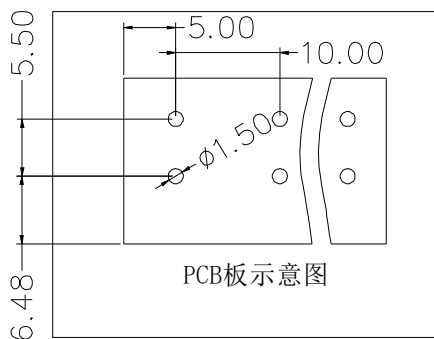

④	弹片/Leaf Spring	不锈钢/SUS301	本色	3
③	引脚/Pin	铜/Copper Alloy	锡/Sn plated	3
②	底座/Base	塑料/PC	UL94-V0	3
①	主座/Housing	塑料/PC	UL94-V0	1
ITEM 序号	NAME OF PART 部件名称	Material 材料	NOTES 备注	QTY 用量

 APPROVED/ 审批 CHECKED/ 核准 DRAWN/ 制图	CAT NO./ 认证型号	CM-240	SHEET: 1/1
	PATE NO./ 成品料号	02.01.008.0002	SCALE: 1:1
	CUST NO./ 客户料号	/	REV.: A01
	MODEL:	CM-240-3P	
	DRAWING NO./ 图号:	CM-240-002	
SIZE: A4	mm (inch)	TYPE/ 图纸类型: CUSTOMER_DRAWING	