


**SPECIFICATION**  
 Current Rating:1A AC/DC  
 Voltage Rating:100V AC/DC  
 Withstanding Voltage:800V AC/Minute  
 Contact Resistance:20Milliohms Max  
 Insulation Resistance:1000Megaohms Min  
 Temperature Range:-25°C~+85°C  
 Material:PA66 UL94V-0 White  
 RoHS Compliant

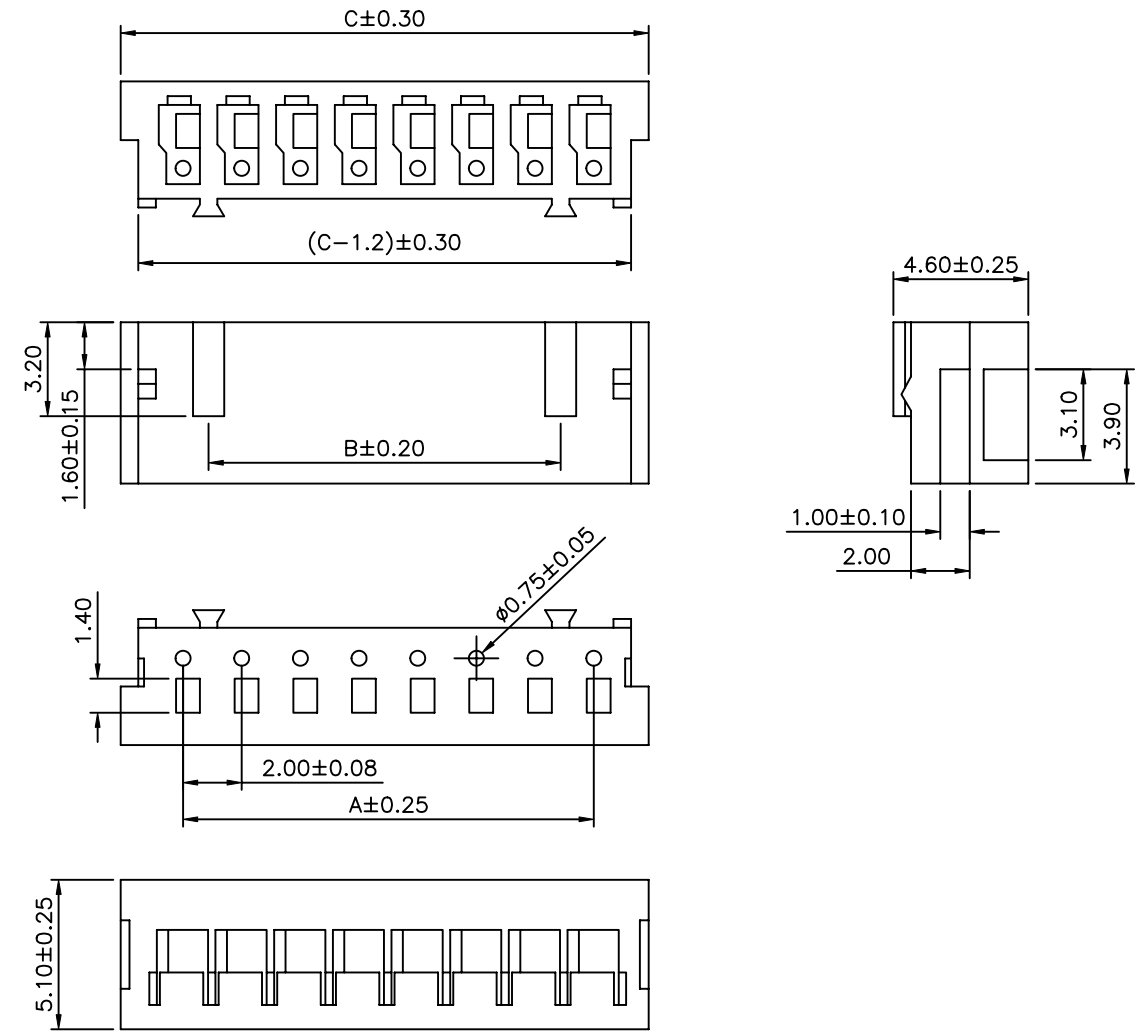

Pin	A	B	C
02	2.00		6.00
03	4.00		8.00
04	6.00	4.00	10.00
05	8.00	6.00	12.00
06	10.00	8.00	14.00
07	12.00	10.00	16.00
08	14.00	12.00	18.00
09	16.00	14.00	20.00
10	18.00	16.00	22.00
11	20.00	18.00	24.00
12	22.00	20.00	26.00
13	24.00	22.00	28.00
14	26.00	24.00	30.00
15	28.00	26.00	32.00
16	30.00	28.00	34.00

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .X* ±2* .XX ±0.20 .XX* ±1* .XXX ±0.10				
PART No. CTXXH-H		MEI						
DRAWING No. CTXXH-H		CHECKED BY HZF						
SCALE NONE		DRAWING BY HYY						
REV.	A0	UNIT mm	⊕	△ A0	NEW RELEASE	HZF	06/27/2008	
NO.	REV.	REVISIONS		CHK	DATE			