


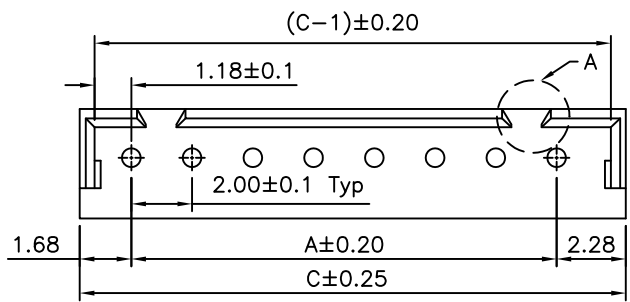



SPECIFICATION
 Current Rating:3A AC/DC
 Voltage Rating:125V AC/DC
 Dielectric Strength:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:500 Megaohms Min.
 Use Environment Temperature:-25°C~+85°C
 Insulator:PA66(UL94V-0),White
 Contact:Brass,Tin Plated Over Nickel
 Pin Retention Force:0.5 Kgf/Pin Min.
 RoHS Compliant

- CT XX D - H
 (1) (2) (3) (4)
 (1) CT:2.0mm CT Series
 (2) XX:No. Of Position
 (3) D:DIP Straight
 (4) H:RoHS Compliant

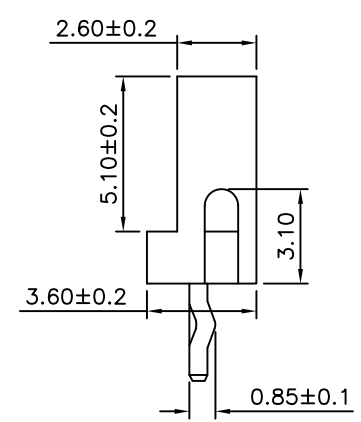

Recommended P.C.B. Layout(Top Side)
 PCB Thickness=1.20mm Tolerance±0.05

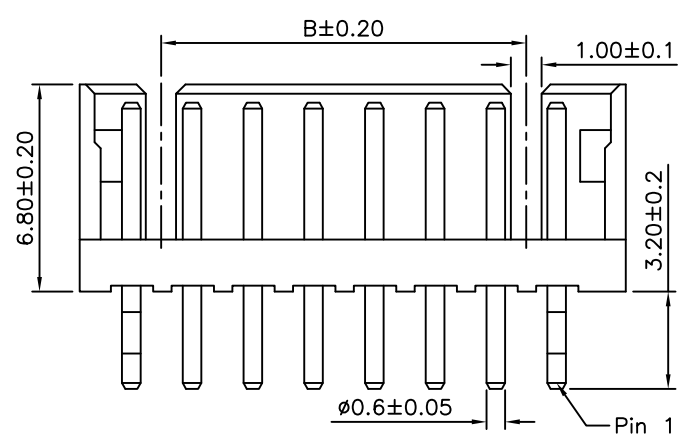

Pin	A	B	C
02	2.00		5.96
03	4.00		7.95
04	6.00	4.00	9.96
05	8.00	6.00	11.96
06	10.00	8.00	13.96
07	12.00	10.00	15.96
08	14.00	12.00	17.96
09	16.00	14.00	19.96
10	18.00	16.00	21.96
11	20.00	18.00	23.96
12	22.00	20.00	25.96
13	24.00	22.00	27.96
14	26.00	24.00	29.96
15	28.00	26.00	31.96

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .X' ±2' .XX ±0.15 .XX' ±1' .XXX ±0.10
PART No. CTXXD-H		MEI		
DRAWING No. CTXXD-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY CYP		UNIT mm
REV.	B1	REV. B1		

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify P/N Code	HZF	09/13/2016
△ B0		NEW RELEASE	HZF	09/26/2013