
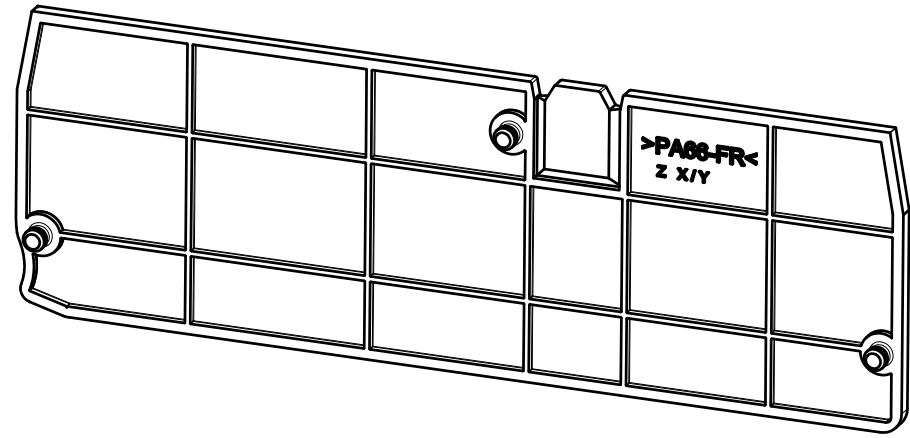
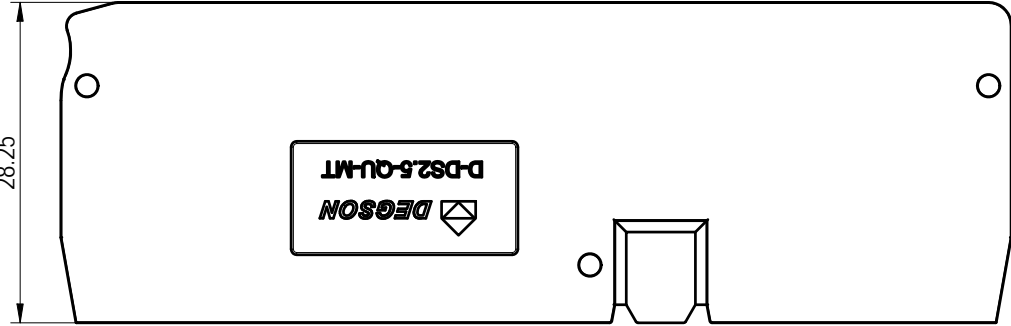
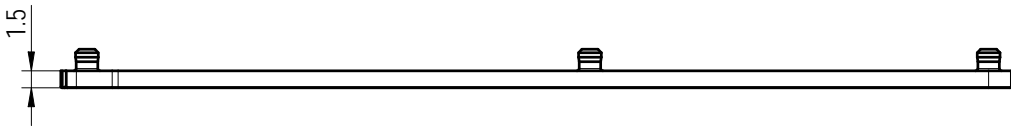


Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by DEGSON. All rights reserved for patent. 未经授权，不得复制或传播本文件内容。保留所有权利。如有侵权，请联系本公司法务部处理。

未注公差/General tolerances (mm)													0.2/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2'
使用温度范围/Operating temperature(°C)												-40~+105		
符合RoHS环保要求/Conform to RoHS												Yes		
阻燃等级/Flame class												UL94V-0		

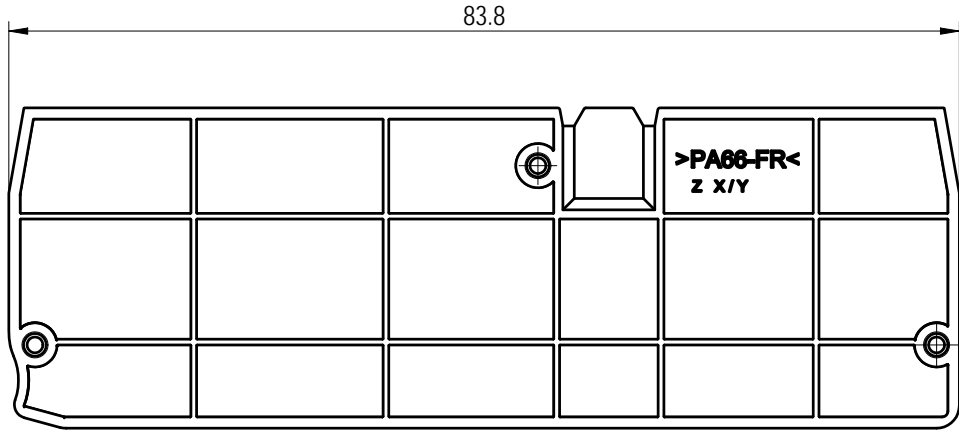

		MATERIAL: PA66	SURFACE/COLOR:		
		MAT NO./REV: / 00	MAT STATUS: 批量		
APPD: 李根芳	2022.11.03	NAME			
CHKD: 马恩开	2022.11.01	D-DS2.5-QU-MT-01P-1Y-00A&Z(H)			
DRFT: 赵前雄	2022.10.27	DRAWING NO. 200068860	TYPE CUSTOMER DRAWING	DRAWING STATUS 已发布	SHEET 1/1

00	/	赵前雄	2022.10.27	
REV	ECN	DESCRIPTION	DATE	