

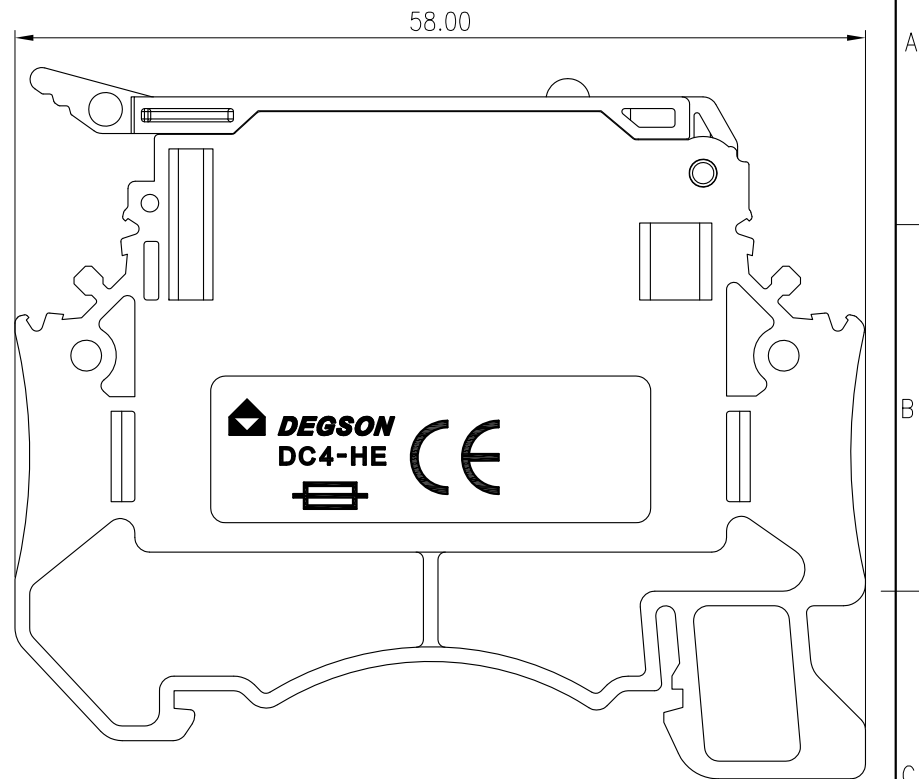
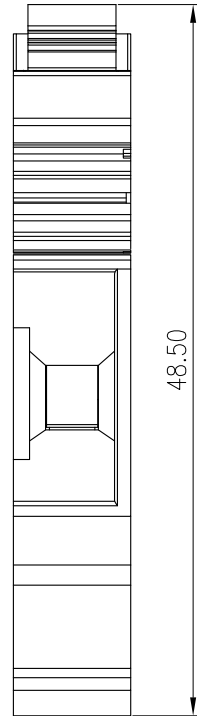
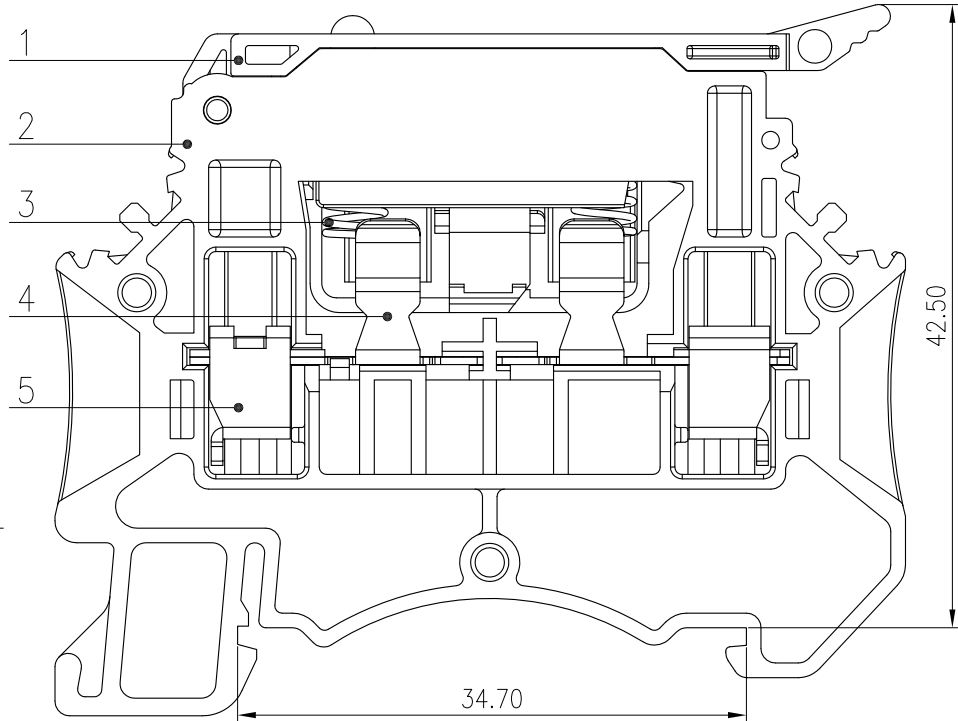


未注公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

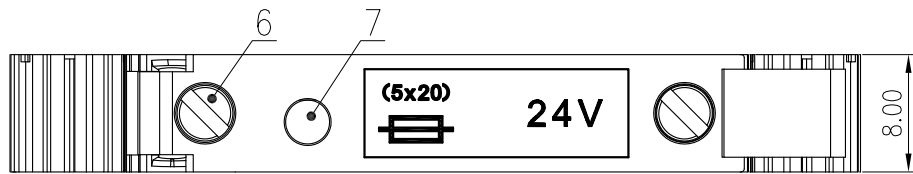

Please refer to the 3D model, for those unmarked dimensions



DC4-HE-LD24-01P-1Y-00AH
DC4-HE - series
LD24 - modification with holder for fuse, with LED
01P - number of pins
1 - single-row
Y = 3 (black color of housing)
00AH - no value

ITEM	NAME OF PART	MATERIAL	NOTES
7	LED lamp assembly	/	/
6	Screw	Steel	M3/Zn plated
5	Cage	Steel	M3/Zn plated
4	Clamp	Copper	Sn plated
3	Spring	Stainless steel	/
2	Body housing	PA66	UL94V-0
1	Fuse housing	PA66	UL94V-0

JL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	24/6.3	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.5		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	20~10/0.5~4,6(Sol)		
间距/Pitch(mm)/线数范围/Poles	8.0/01P		
剥线长度/Stripping length(mm)	9		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

REV	ECN	DESCRIPTION	DRFT	DATE

MATERIAL:	/	SURFACE:	/
MAT NO.:		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD: Li GL 2021.02.25		NAME: DC4-HE-LD24-01P-1Y-00A(H)	
CHKD: Mao J 2021.02.25		DRAWING NO.: 11000479	
DRFT: Chen K 2021.01.29		REV	D0-1
SIZE: A4	mm (inch)	TYPE: CUSTOMER DRAWING	SCALE: 2:1 SHEET 1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者将承担法律责任。未经许可不得复制或向外泄露任何权利。