
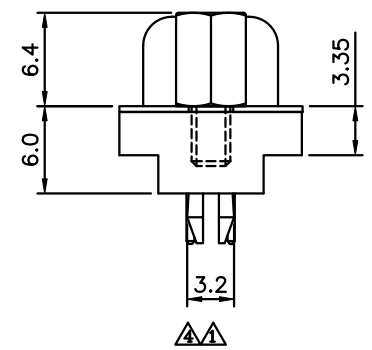


△ SPECIFICATION
 Current Rating: 3 Amp
 Voltage Rating: 250V AC/RMS 60Hz
 Contact Resistance: 20 Milliohms Max. At 1 Amp DC
 Insulation Resistance: 1000 Megaohms Min. At 500V DC
 Withstanding Resistance: 1000V AC/RMS 60Hz For 1 Minute
 △ Operation Temperature: -55°C ~ +105°C
 Insulator: PBT+30%G.F. (UL94V-0) △
 △ Contact: Brass, Gold Plated On Contact Area, Tin Plated On Solder Tails, Over Nickel
 Shell: Steel, Tin Plated Over Copper
 Boardlock: Brass, Tin Plated
 Screw: Brass, Nickel Plated
 RoHS Compliant

- △ $\frac{DDM}{(1)} \frac{XX}{(2)} \frac{P}{(3)} \frac{ZJ}{(4)} - \frac{XX}{(5)} - \frac{H}{(6)}$
- (1) DDM: D-SUB DIP Straight Metal Shell With Plastic
 - (2) XX: No. Of Position
 - (3) P: Male
 - (4) ZJ: Rivet With Boardlock With Front Jackscerw
 - (5) XX: Insulator Color
Blank: Black
BL: Blue
 - (6) H: RoHS Compliant

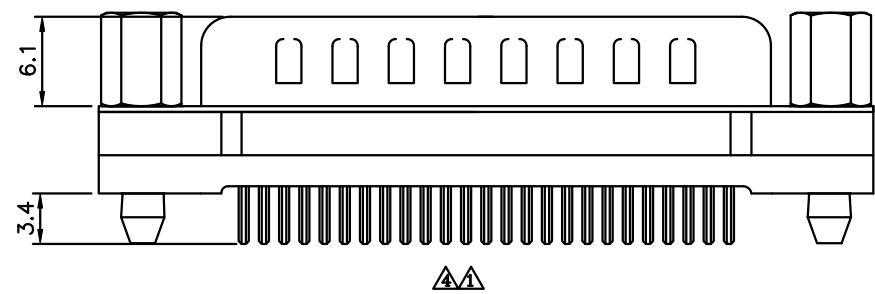

△ Pin	A	B	C	D
09	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	△ A4	Modify P/N: DDMXXPZJ-H --> DDMXXPZJ-XX-H	HZF	10/29/2016
PART No. △ DDMXXPZJ-XX-H	CHECKED BY MEI HZF	X. ±0.38 X.* ±3° .X ±0.25 .X.* ±1.0° .XX ±0.13 △	△ A3	Modify Spec.	HZF	11/12/2014
DRAWING No. DDMXXPZJ-XX-H	DRAWING BY CYP	UNIT mm	△ A2	Add Operation Temp.	HZF	09/08/2011
SCALE NONE	REV. A4	UNIT mm	△ A1	Modify Data	HZF	07/15/2011
			△ A0	NEW RELEASE		
			NO. REV.	REVISIONS	CHK	DATE