




未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

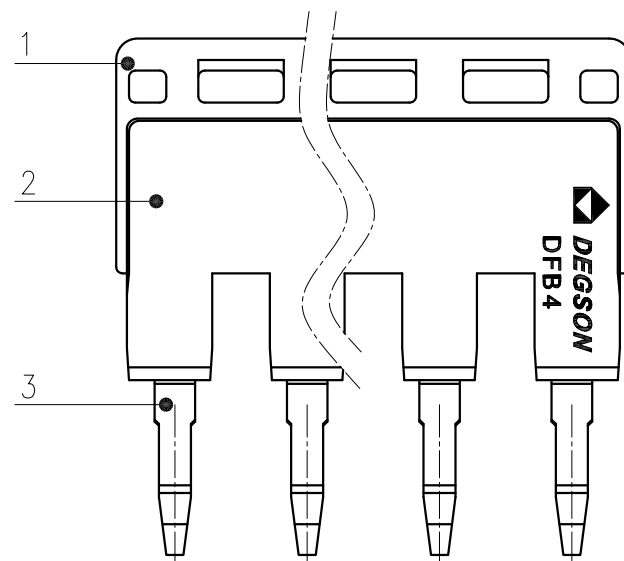

$6.2 \times (N-1) + 5.5$

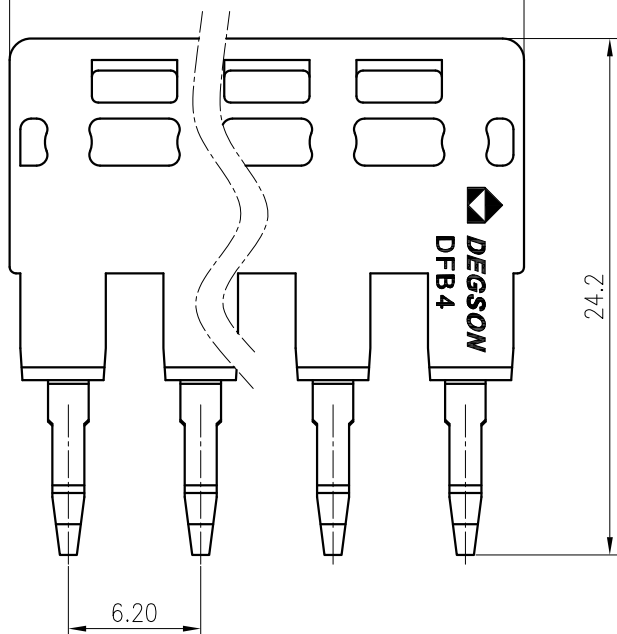

DFB4-XXP-1Y-00AH
DFB4 - series
XXP - number of Pins (02P, 03P ... 24P)
1 - single-row
Y - color of cover/housing (1 - gray color)
00AH - no value

Rated voltage 600 volts

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	/	/
间距/Pitch(mm)/线数范围/Poles	6.2/N=02~10P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

3	Current	Copper	Sn plated
2	Cover	PA66	UL94 V-0
1	Housing	PA66	UL94 V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: Li GL 2020.05.22	NAME: DFB4-XXP-1Y-00A(H)		
CHKD: Mao J 2020.05.22	DRAWING NO.: DFB4-C01		REV: D0-1
DRFT: Chen K 2020.05.22	TYPE: CUSTOMER DRAWING		SCALE: 3:1 SHEET 1/1