




SPECIFICATION

Current Rating:1.0 Amp
Voltage Rating:250V AC/DC
Withstand Voltage:250V AC/DC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:100 Megaohms Min.
Operation Temperature:-25°C~+85°C
Insulator:PA9T+30%G.F.(UL94V-0)
Contact:Brass,Gold Flash Over All,Over Nickel
RoHS Compliant

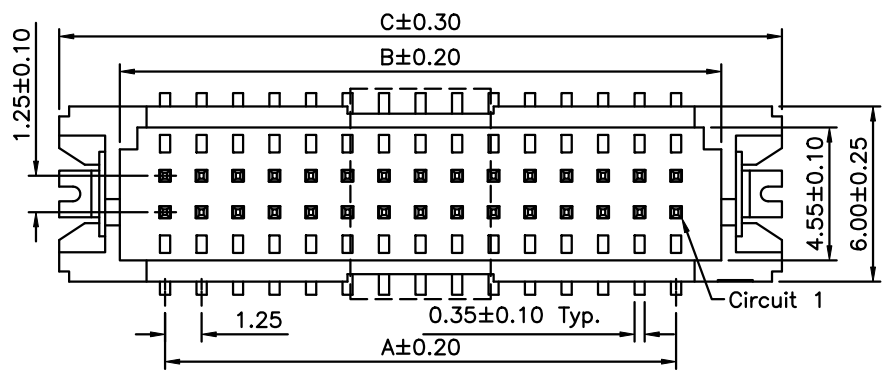

DFT 2 X XX V G C - RXXX - H
(1) (2) (3) (4) (5) (6) (7) (8)

- (1) DFT:1.25mm DF13 Series
- (2) 2: Dual Row
- (3) XX: No. Of Position/Per Row
- (4) V: SMT Straight
- (5) G: Gold Flash Over All, Over Nickel
- (6) C: With Cap
- (7) RXXX: Tape & Reel
- (8) H: RoHS Compliant

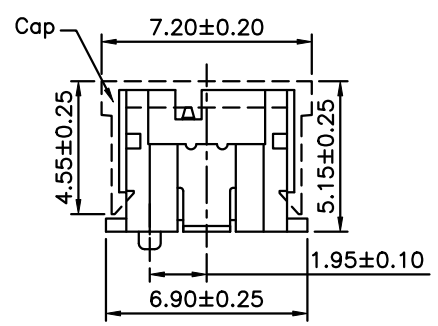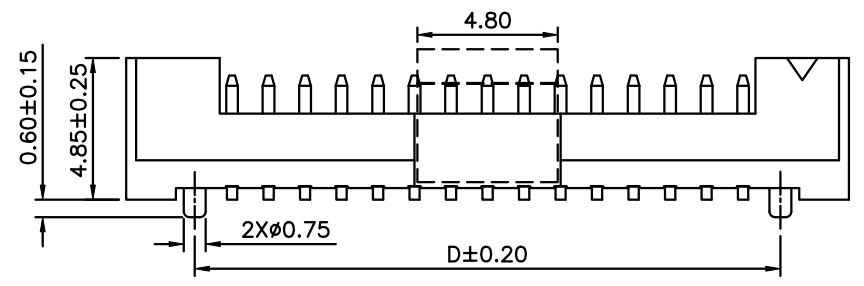

Pin	A	B	C	D	E
10	5.00	8.10	12.25	7.55	8.75
20	11.25	14.35	18.50	13.80	15.00
30	17.50	20.60	24.75	20.05	21.25
40	23.75	26.85	31.00	26.30	27.50

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
PART No. DFT2XXXVGC-RXXX-H		MEI		
DRAWING No. DFT2XXXVGC-RXXX-H		HZF		
SCALE NONE		CYP		
REV.	B0	UNIT mm		

NO. REV.	BO	NEW RELEASE	HZF	10/16/2016
		REVISIONS	CHK	DATE