

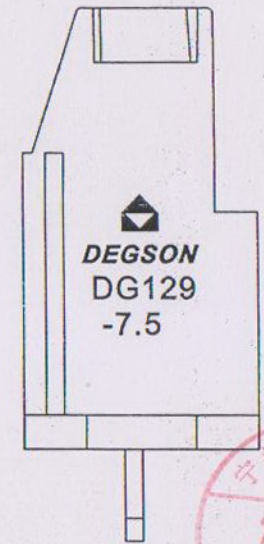
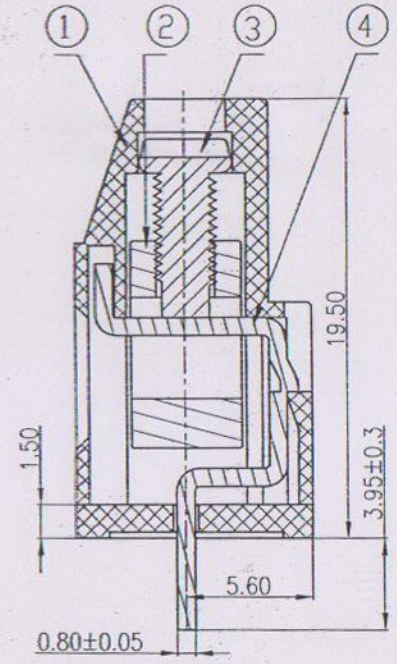


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△1	0280	增加QC刻字	ZMT	12/14/11

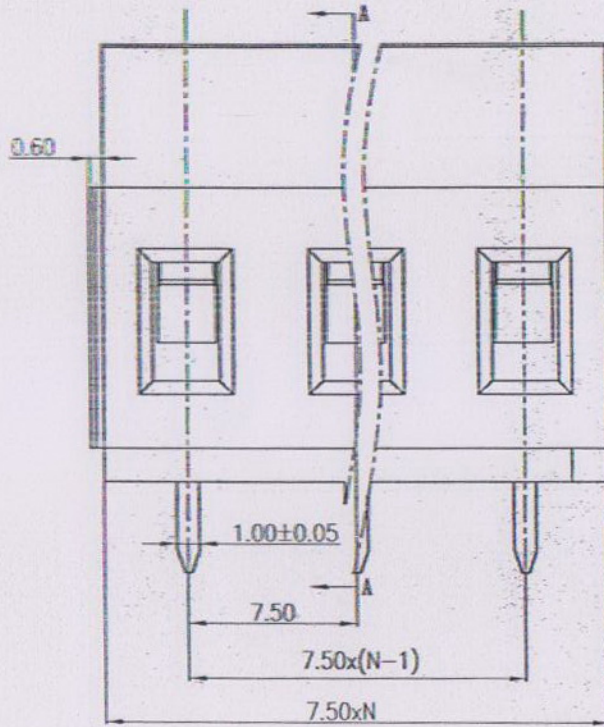

- Notes:
1. Pitch: 7.5mm Poles: 2P-XXP
 2. Rated Voltage Current: UL 300V 20A
VDE 450V 20A
 3. Operation temperatures: -40°C ~ +105°C
 4. Withstanding Voltage: AC2000V/1Min
 5. Insulation Resistance: 5000MΩ/DC1000V
 6. Wire Range: 26~12AWG, 2.5mm²
 7. Max. Torque Value: M3, 5.1kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150	—		
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0.07

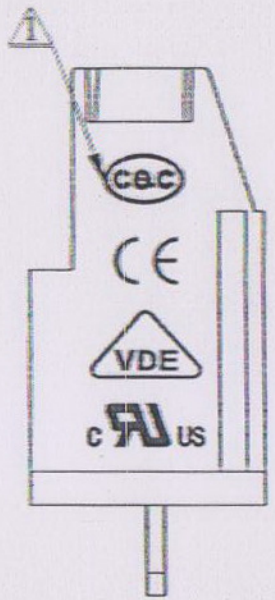

5	DG129-Cover	4!10COYXXA(H)	1	PA66	UL94V-0
4	DG129-Pin header	4029B00010(H)	XX	Barss	SnCe
3	DG129-Screws-M3	S000001430(H)	XX	Steel	Cr Zn
2	DG129-Cage	X000000200(H)	XX	Brass	Ni plated

1	DG129-7.5-XXP-1Y-00A 塑体	4110A0YXXA(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DFTD ZYH DATE 08/08/08 CHK'D HXG DATE 12/19/11 TOLERANCES EXCEPT AS NOTED APPVL Lyle DATE 12/20/11		DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
NAME DG129-7.5-XXP-1Y-00A(H)		DRAWING NO. DG129-7.5-E01 /PART NO.			
ANGLES ± 1° THIRD ANGLE PROJECTION		FINISH: SCALE: 1:1 DO NOT SCALE DRAWING			
		SIZE A4		REV 11 12/14/11	
		SHEET 1		OF 1	