


未注公差/General tolerances(mm)													0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

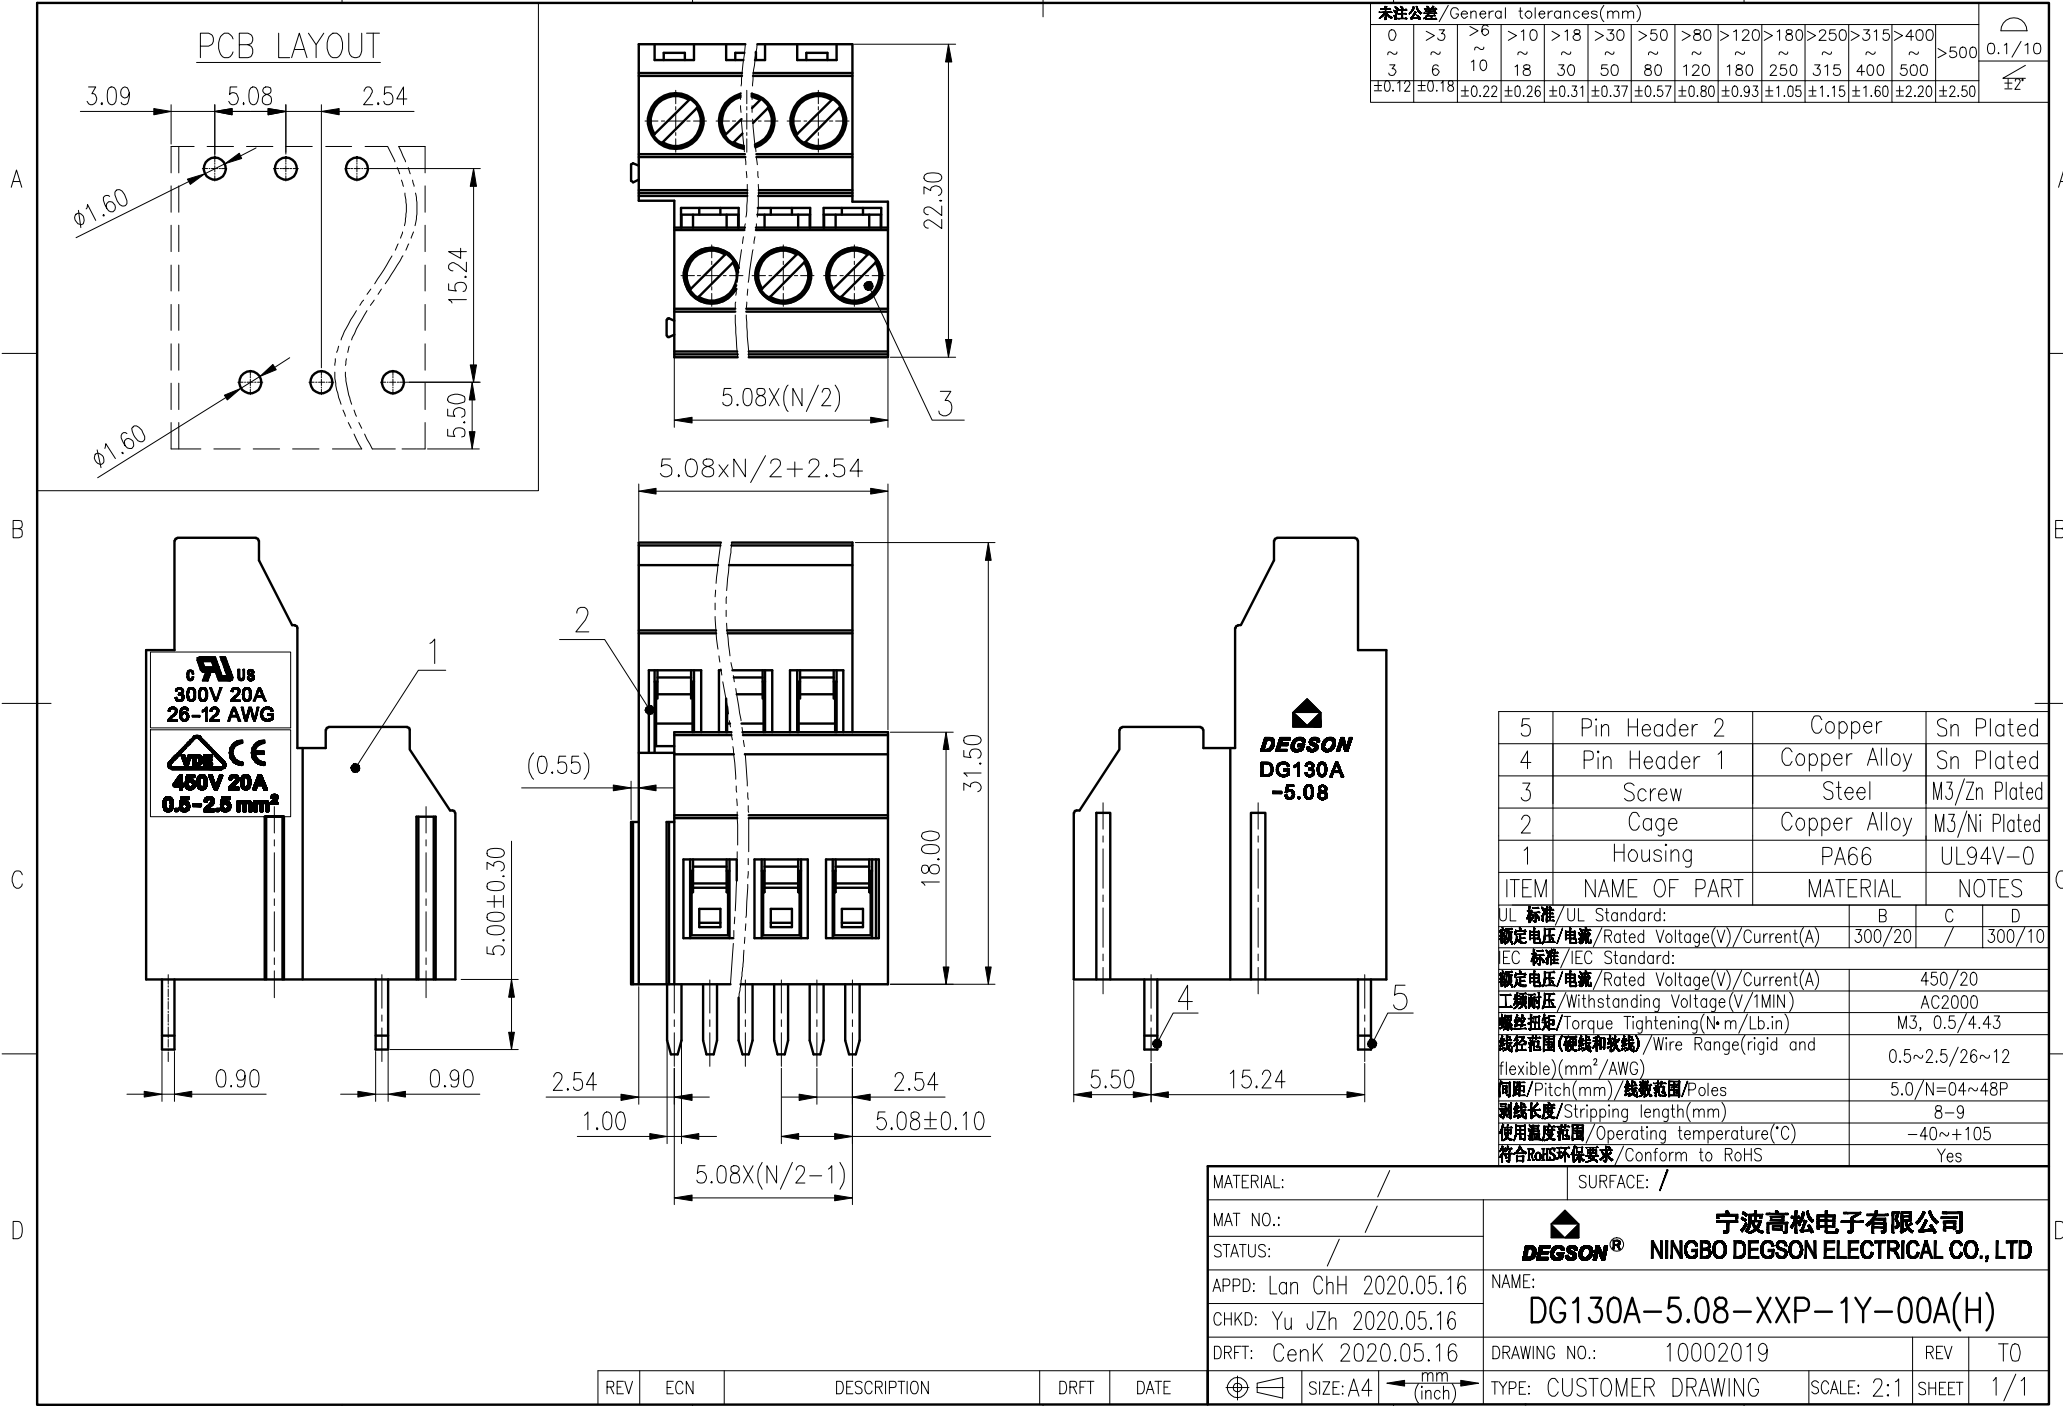

5	Pin Header 2	Copper	Sn Plated
4	Pin Header 1	Copper Alloy	Sn Plated
3	Screw	Steel	M3/Zn Plated
2	Cage	Copper Alloy	M3/Ni Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
额定电压/电涌/Rated Voltage(V)/Current(A)		B	C
		300/20	/ 300/10
IEC 标准/IEC Standard:			
额定电压/电涌/Rated Voltage(V)/Current(A)			450/20
工频耐压/Withstanding Voltage(V/1MIN)			AC2000
螺丝扭矩/Torque Tightening(N·m/Lb.in)			M3, 0.5/4.43
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)			0.5~2.5/26~12
间距/Pitch(mm)/线数范围/Poles			5.0/N=04~48P
剥线长度/Stripping length(mm)			8~9
使用温度范围/Operating temperature(°C)			-40~+105
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL: /	SURFACE: /		
MAT NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: Lan ChH 2020.05.16	NAME: DG130A-5.08-XXP-1Y-00A(H)		
CHKD: Yu JZh 2020.05.16	DRAWING NO.: 10002019		
DRFT: CenK 2020.05.16	REV		TO
④	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE