

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE
2			1

NOTES:

- UL Standard
- 1. Rated voltage/current : 300V / 7A
- 2. Withstanding voltage : AC1500V/1min.
- 3. Wire range : 22~18AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(kV)	6.0kV	6.0kV	6.0kV
Rate voltage(V)	1000V	630V	500V
Rate current(A)	10A		






2. Wire range : 0.2~1.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 7.00mm, Poles : 02-XXP
- 3. Stripping length : 8.5~9.5mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range	in mm	Nominal dimension	range	-	+/-	D
Over	6	10	30	60	100	150
TO	TO	TO	TO	TO	TO	TO
6	10	24	30	60	100	150
±0.15/±0.20/±0.30/±0.30/±0.50/±0.70/±1.00/±1.30 ±2°						

6. RoHS Compliance

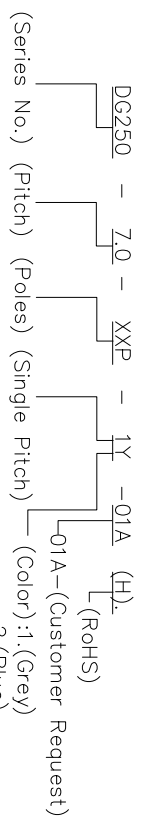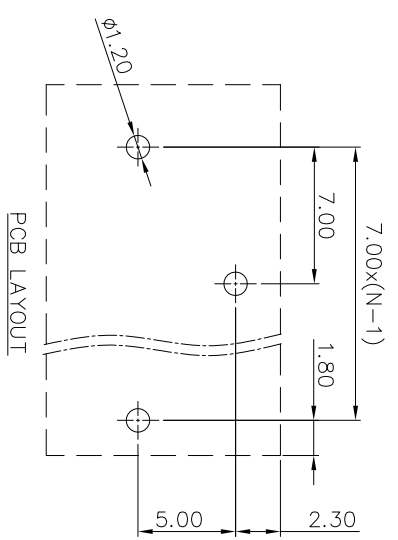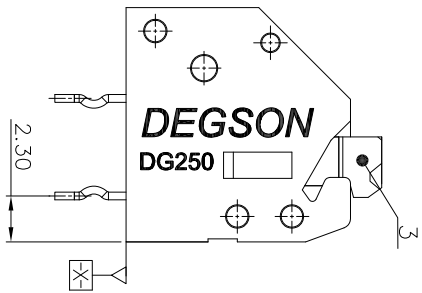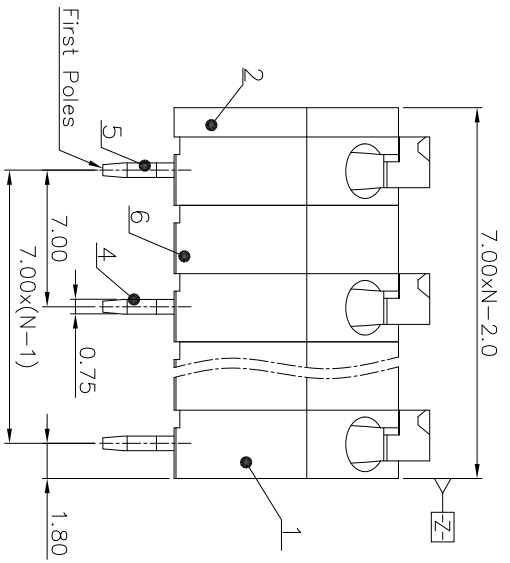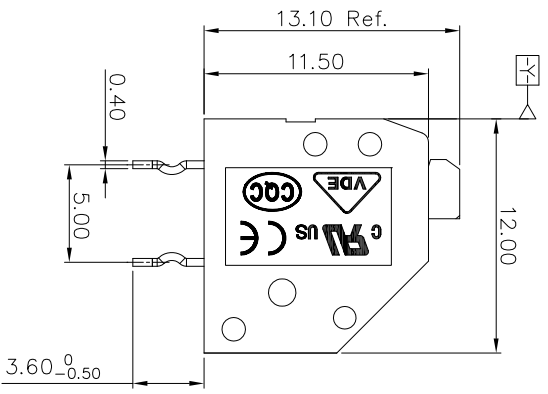

文 管 中
研 发 专
2020.04.09
心 用
(仅限内部使用, 对外无效)

ITEM	NAME OF PART	MATERIAL	NOTES
6	Clapboard	PA66	UL94V-0
5	Small Pin header	Copper alloy	Sn Plated
4	Big Pin header	Copper alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

DETACHED LISTS	
PART NO.:	/
APPD: LiGi	2020.04.09
CHKD: MGEk	2020.04.09
DRFT: NPX	2017.07.13
THIRD ANGLE PROJECTION	
NAME:	DEGSON ® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	DG250-7.0-C02
SCALE	1:1