
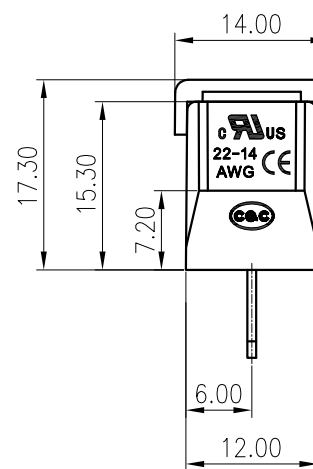
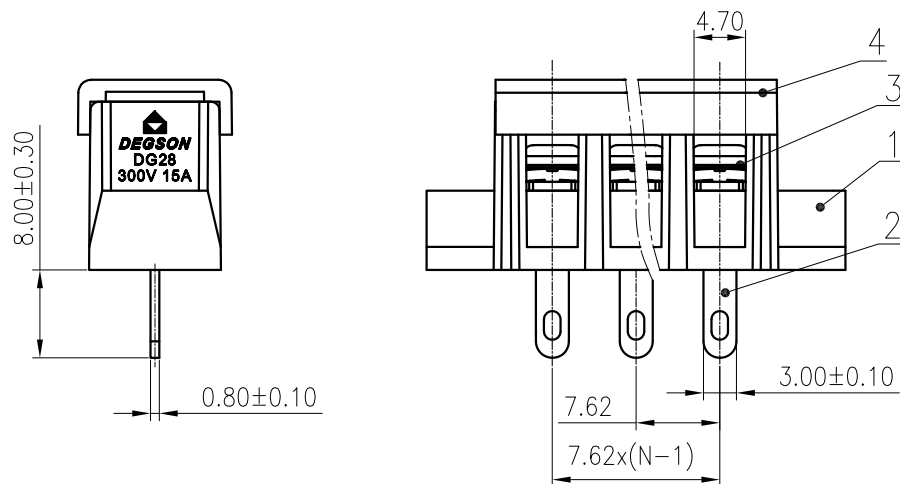



未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

(Without Cover)

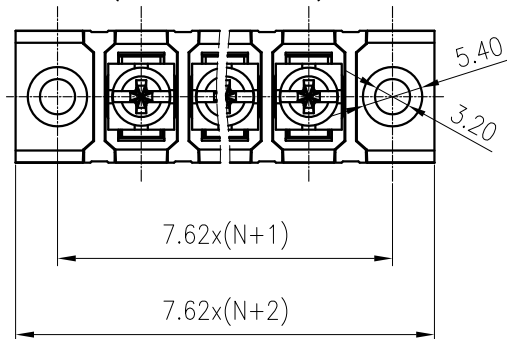

PCB LAYOUT

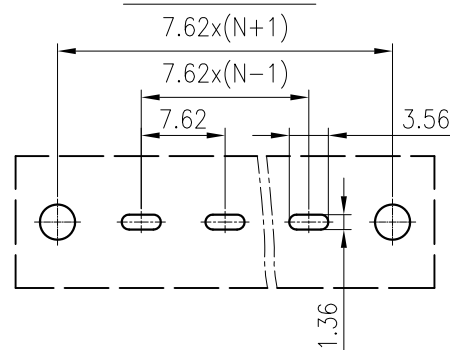

4	Cover	PC	UL94V-2
3	Screw	Steel	M3/Ni Plated
2	Pin header	Copper alloy	M3/Sn Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10

IEC 标准/IEC Standard:	B	C	D
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2

额定电压/电流/Rated Voltage(V)/Current(A)	300/24	300/24	600/24
-------------------------------------	--------	--------	--------

额定脉冲电压(KV)/Rate Impulse Voltage(KV)	5	5	5
-------------------------------------	---	---	---

螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43
-----------------------------------	--------------

线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)	22~14
---	-------

间距/Pitch(mm)/线数范围/Poles	7.62/N=02~24P
-------------------------	---------------

剥线长度/Stripping length(mm)	7
---------------------------	---

使用温度范围/Operating temperature(°C)	-40~+105
----------------------------------	----------

符合RoHS环保要求/Conform to RoHS	Yes
----------------------------	-----

MATERIAL:	/	SURFACE:	/
-----------	---	----------	---

MAT NO.:	/	宁波高松电子有限公司
----------	---	------------

STATUS:	/	NINGBO DEGSON ELECTRICAL CO., LTD
---------	---	-----------------------------------

APPD:	/	NAME:
-------	---	-------

CHKD:	/	NAME:
-------	---	-------

DRFT: CenMZ 2020.05.29	DRAWING NO.: DG28H-C01	REV	TO
------------------------	------------------------	-----	----

SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1.5:1	SHEET
----------	------------------------	--------------	-------

mm (inch)	1/1
-----------	-----

REV	ECN	DESCRIPTION	DRFT	DATE