
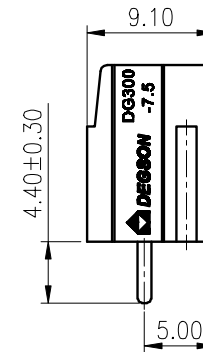
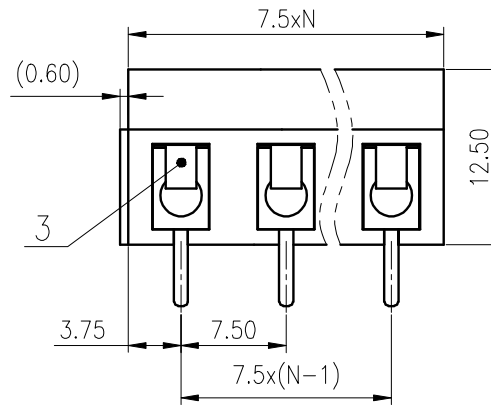

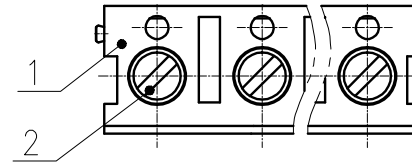


PCB LAYOUT

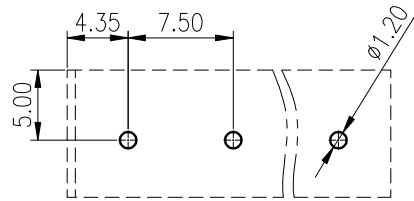

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

4	Pin	Copper alloy	M3/Sn Plated
3	Spring	Stainless steel	
2	Screw	Steel	M3/Zn Plated
1	Housing	PBT	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
------	--------------	----------	-------

UL 标准/UL Standard:

额定电压/电流/Rated Voltage(V)/Current(A)

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree

额定电压/电流/Rated Voltage(V)/Current(A)

工频耐压/Withstanding voltage(V/1Min)

螺丝扭矩/Torque Tightening(N·m/Lb.in)

线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)

间距/Pitch(mm)/线数范围/Poles

剥线长度/Stripping length(mm)

使用温度范围/Operating temperature(°C)

符合RoHS环保要求/Conform to RoHS

Yes

MATERIAL:

SURFACE:

MAT NO.:

STATUS:

APPD: Lan ChH 2020.05.25

CHKD: Yu JZh 2020.05.25

DRFT: Li Zh 2020.05.25

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTDNAME:
DG300-7.5-XXP-1Y-00A(H)

DRAWING NO.: 10002156

REV TO

TYPE: CUSTOMER DRAWING

SCALE: 2:1

SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------