

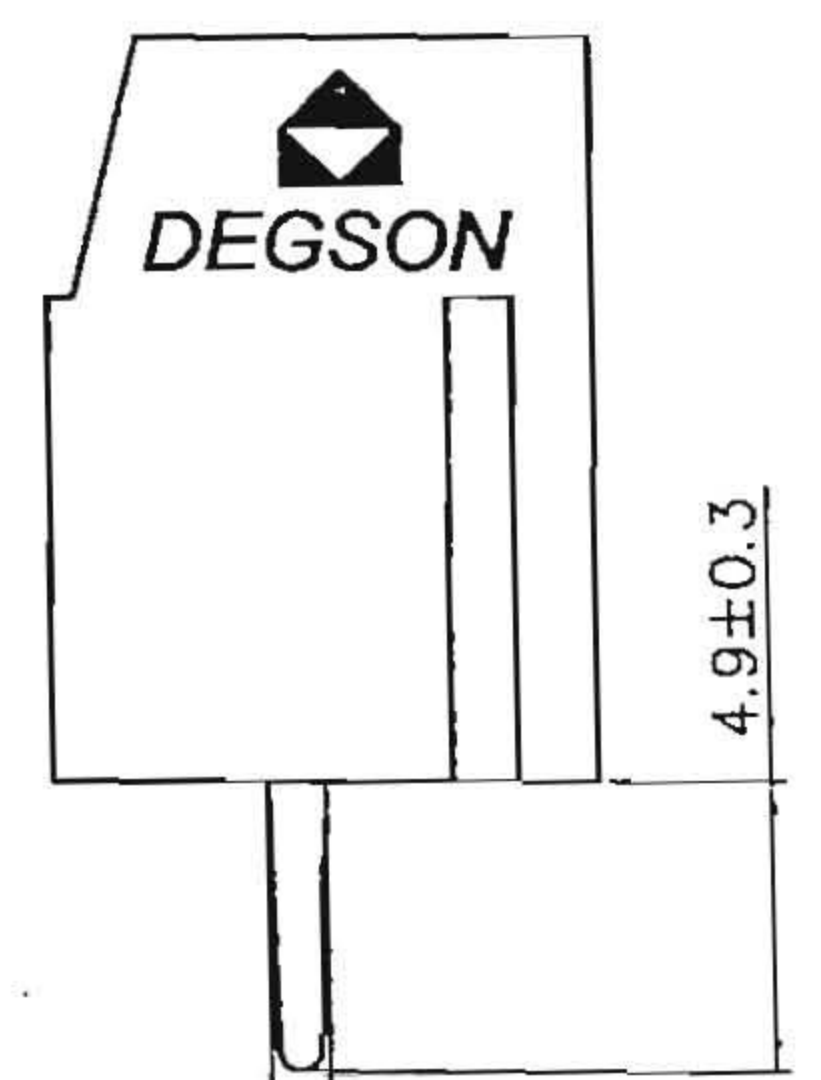
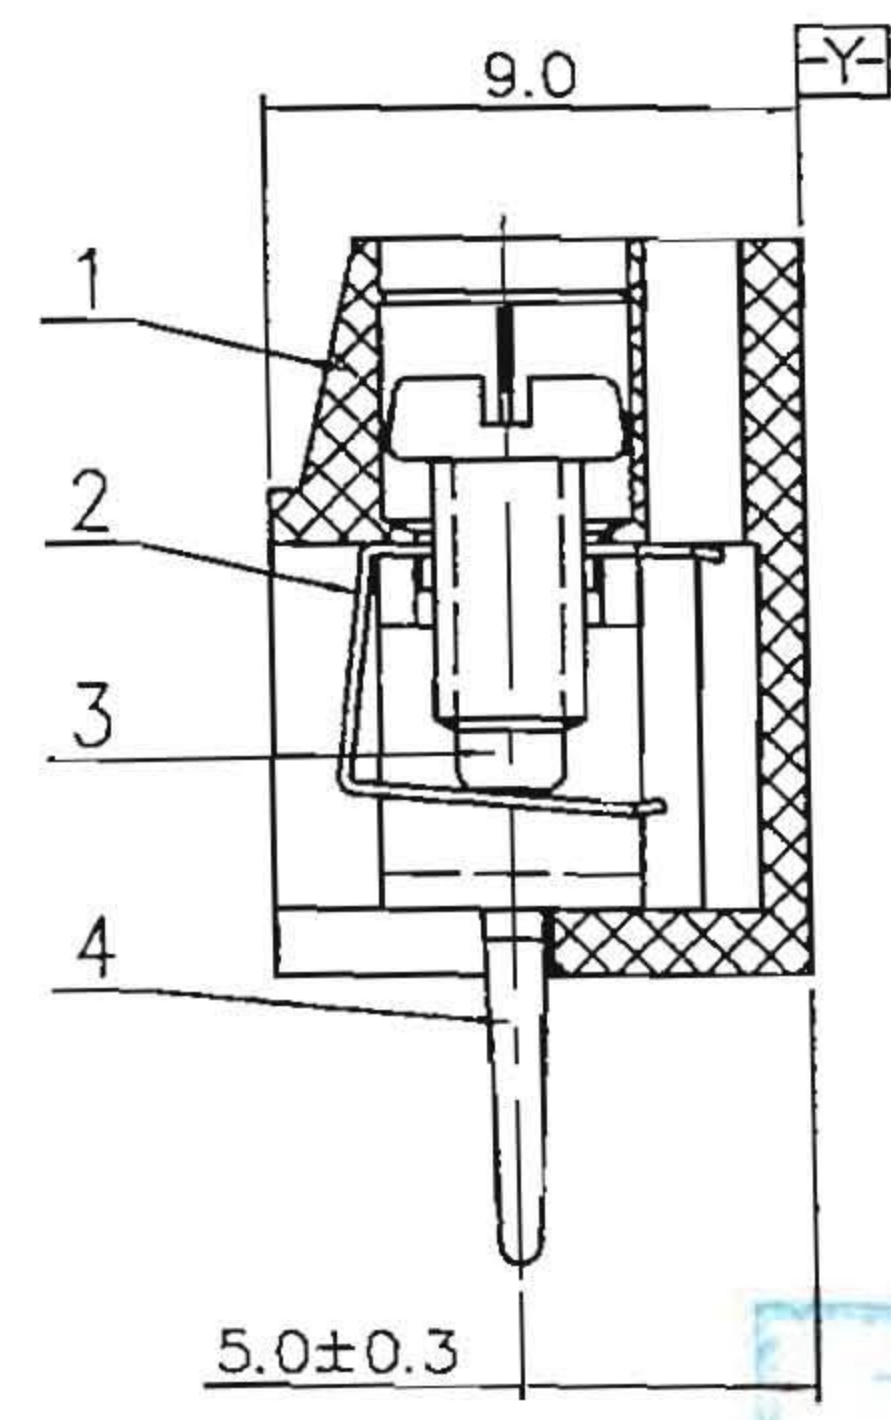
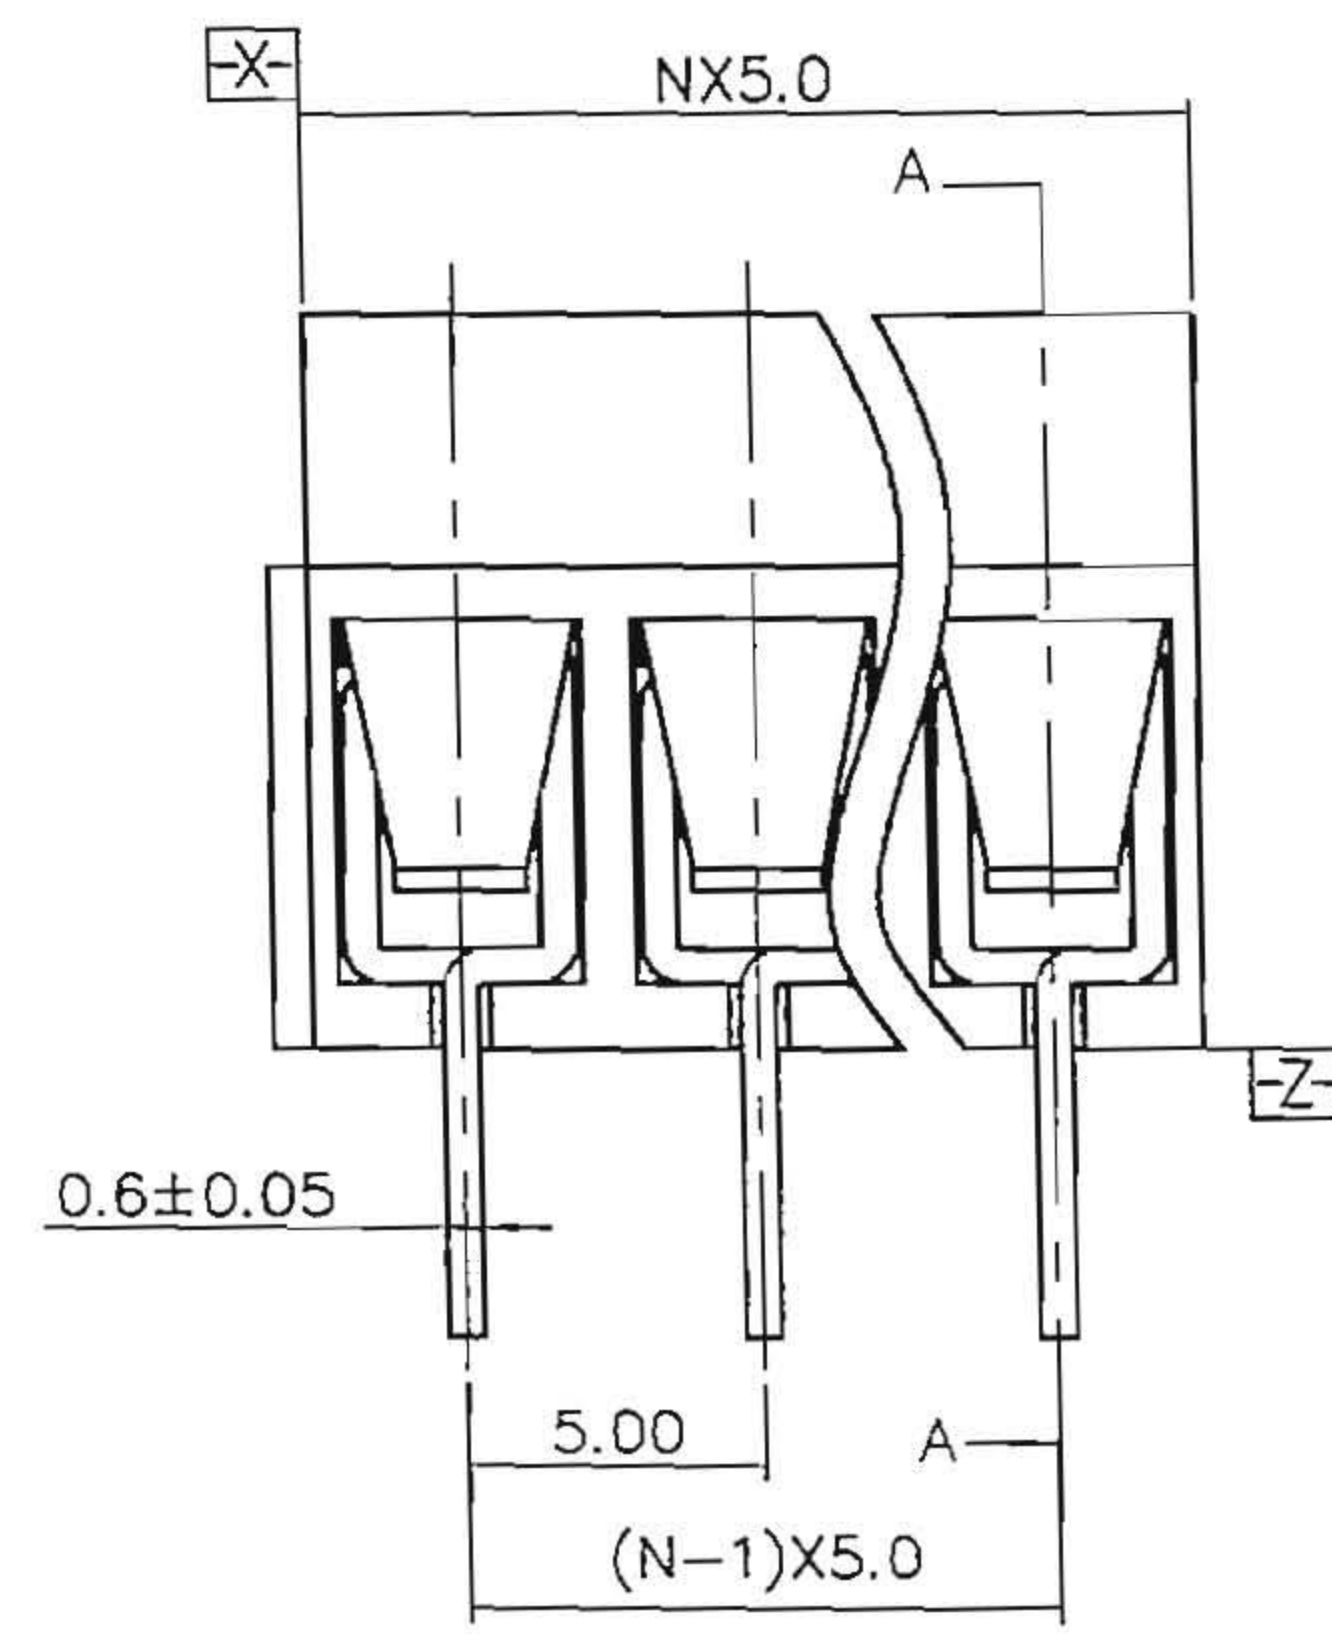
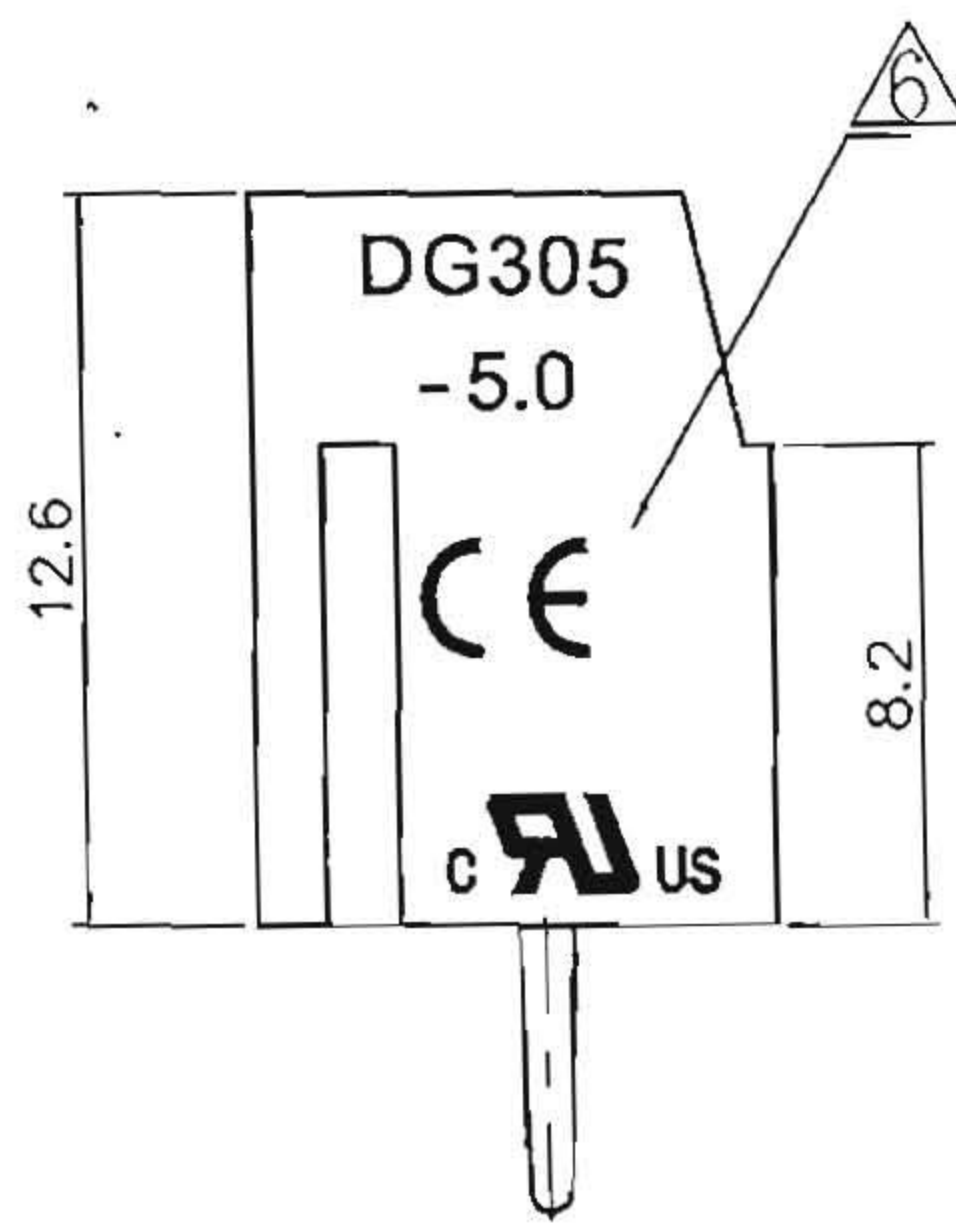


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△1		Drawing Revise	Haoyh	03/16/06
△2		增加VDE、CE标志	LJH	12/24/07
△3		修改参数“450V”为“250V”	LJH	05/16/09
△4		弹片材料由磷青铜变为不锈钢	YHG	07/07/09
△5	13-0003	Drawing Revise	YHG	01/03/13
△6	14-0921	增加“CE”标示	yang an	08/28/14

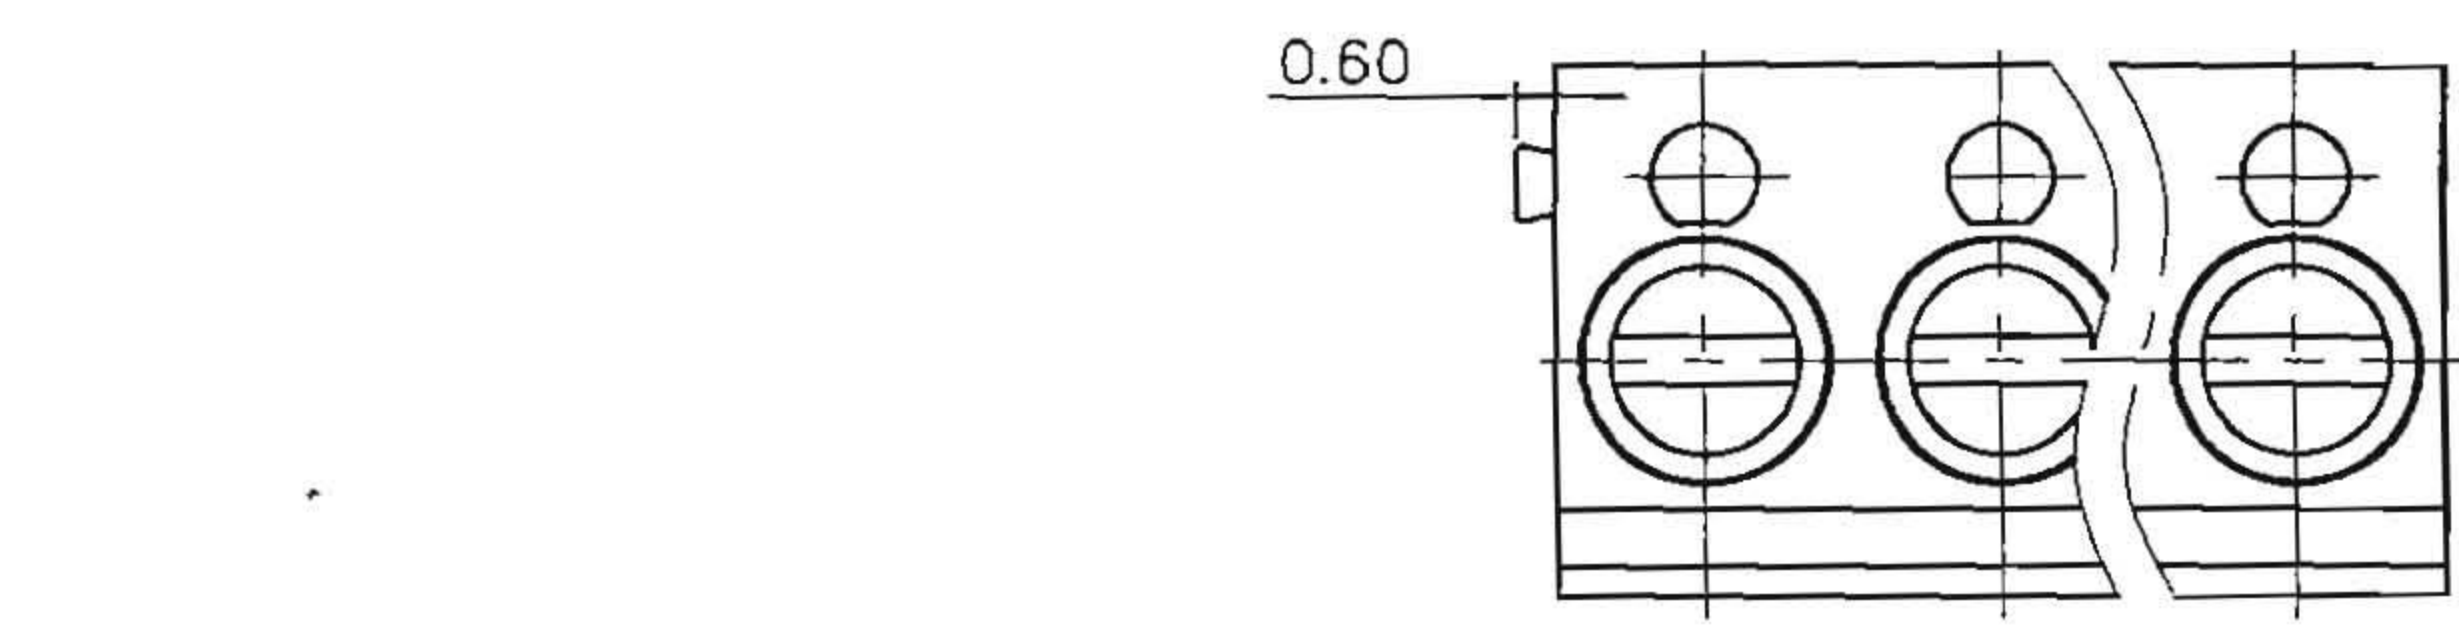

宁波高正电子有限公司
 2014.09.28
 (仅限内部使用, 对外无效)

- NOTES:
- 1.DIMENSION SHALL BE INTERPRETED PER ASME Y14.5-2009.
 - 2.PITCH: 5.0MM ,POLES: 2-24P
 - 3.RATED VOLTAGE/CURRENT:UL 300V/15A
IEC 250V/20A
 - 4.OPERATION TEMPERATURES: -30°C~+120°C
 - 5.WITHSTANDING VOLTAGE: AC2000V/1MIN
 - 6.INSULATION RESISTANCE: 5000MΩ/DC1000V
 - 7.WIRE RANGE: 22~14AWG,2.5MM²
 - 8.MAX.TORQUE VALUE: M2.5,3.0KGF.CM
 - 9.UNDIMENSIONED TOLERANCES:

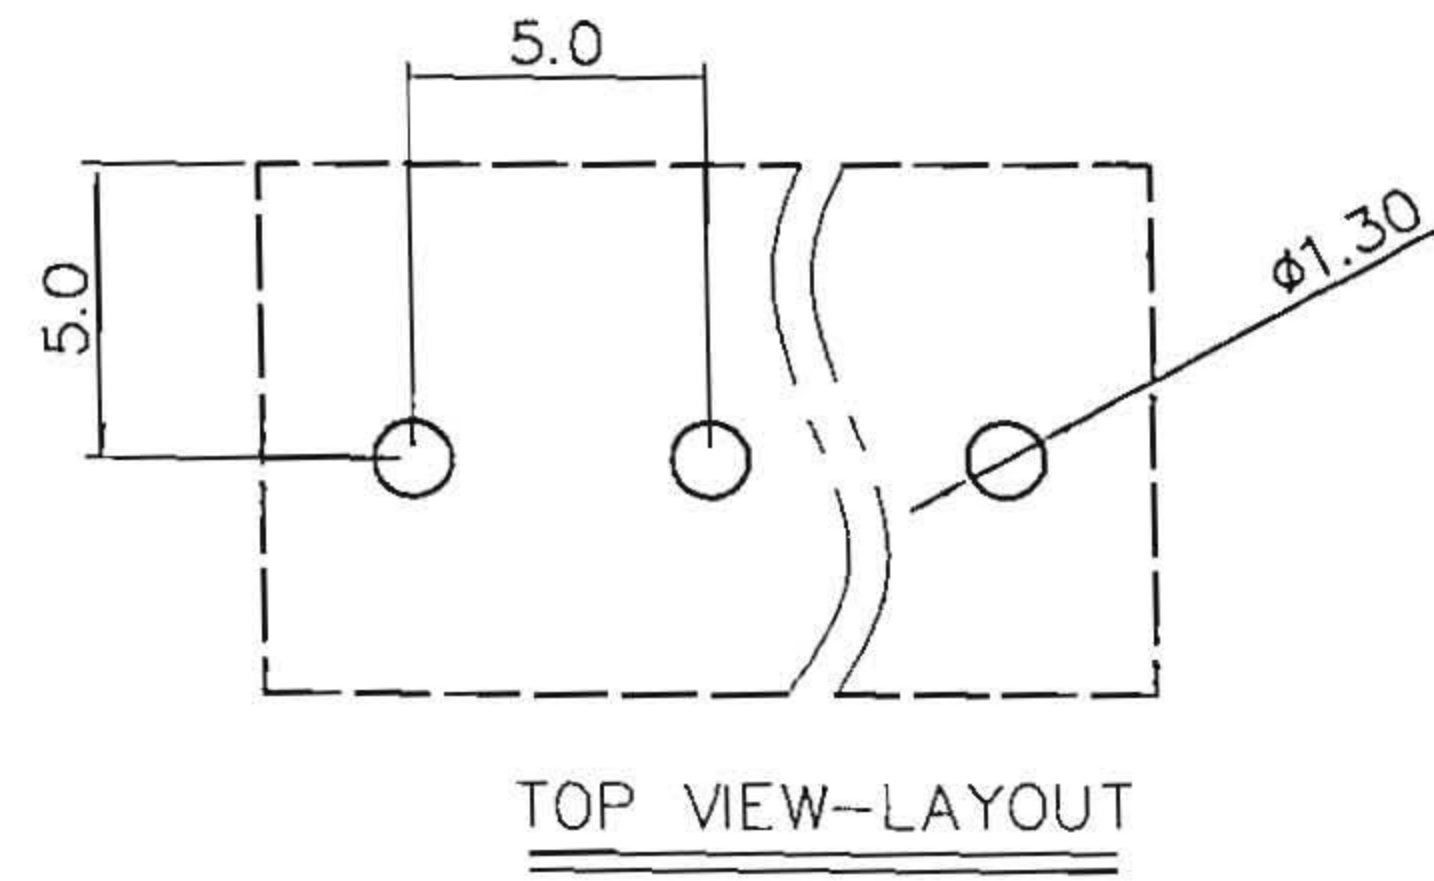

ITEM	NAME OF PART	NO. OF PART	Q "TY"	MATERIAL	NOTES
4	DG305-Pin header	4003B00010(H)	XX	Brass	Tin pladed
3	DG305-Screws	S000001620(H)	XX	Steel	Cr ³ Zn
2	DG305-spring	X000000260(H)	XX	Stainless steel	
1	DG305-5.0-Housing	4003AYXXA(H)	△6	PBT	UL94V-0

PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM						
TO	OVER	TO	TO	TO	TO	TO	OVER	
6	10	30	60	100	150	150		□
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	0.05/10

DEGSON® 宁波高正电子有限公司
Ningbo Degson Electrical Co., Ltd.

FINISH: PART NO.: Series DG305-5.0 NAME: DG305-5.0-XXP-1Y-00A(H)

APPD: Jean 09/20/14 TITLE: ASSEMBLY DRAWING
CHKD: Aaron 8/14/14 DRAWING NO.: DG305-5.0-E02

DRFT: Haoyh 03/18/05" DO NOT SCALE DRAWING SCALE 1:1 SHEET 1/1