
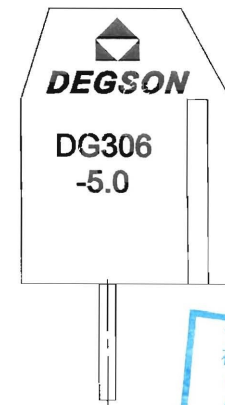


Notes:

- Pitch: 5.0mm, Poles: 2-XXP
- Rated voltage/current: UL 300V/10A  
IEC 250V/15A
- Operation temperatures: -30°C ~ +120°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ/DC1000V
- Wire Range: 22~14AWG, 1.5mm<sup>2</sup> △
- Max. Torque Value: M2.5, 3.0kgf.cm
- Undimensioned Tolerances:

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/28/06
△		增加VDE, CE标志	LJH	12/03/07
△		修改参数	LJH	03/18/09
△	11-0160	去掉工艺槽	ZXX	07/03/11
△	12-0084	增加倒圆角, 改善扭力	YHG	05/02/12
△	13-0002	Drawing Revise	YHG	01/03/13

Pitch range in mm		Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	—	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	
						±1.0	
						0.05/0	

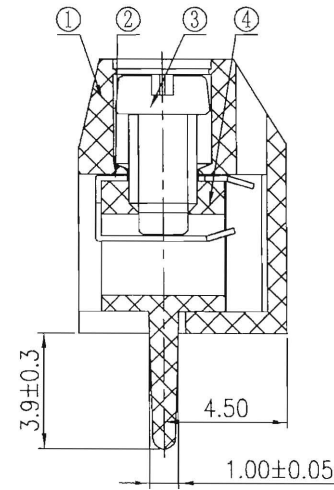

文管中心用  
2015.08.26  
(仅限内部使用, 对外无效)

4	DG306-pin header	4006B00020 (H)	XX	Brass	Sn/Ce
3	DG301-Screws	S000001420 (H)	XX	Steel	Cr <sup>3+</sup> Zn
2	DG306-Spring	X000000160 (H)	XX	Stainless steel	
1	DG306-5.0-Housing	4006A0YXXA (H)	1	PBT	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTD Zhuwm DATE 07/17/04 CHKO DATE MFO DATE 1/5-13 APPVL DATE 01/05/13 DEGSON NINGBO DEGSON ELECTRICAL CO., LTD NAME: DG306-5.0-XXP-1Y-00A(H) G.E : Series DG306-5.0 FINISH : SCALE : 1:1 DO NOT SCALE DRAWING			
DETAILED LISTS		DRAWING NO. DG306-5.0-E06 /PART NO. SIZE A3 REV 16 01/03/13			
THIRD ANGLE PROJECTION		SHEET 1 OF 1			