D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
2		Drawing Revise	Haoyh	06/27/06
3		增加VDE、CE标志	LJH	11/12/07"
4		修改焊脚厚度尺寸	LJH	05/17/08"

Notes:

1. Pitch:3.5mm ,Poles:2-24P
2. Rated voltage/current:UL 150V/10A
   VDE 130V/10A
3. Operation temperatures:-40℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:26~16AWG, 1.0mm²
7. Max. Torque Value:M2, 2.04kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

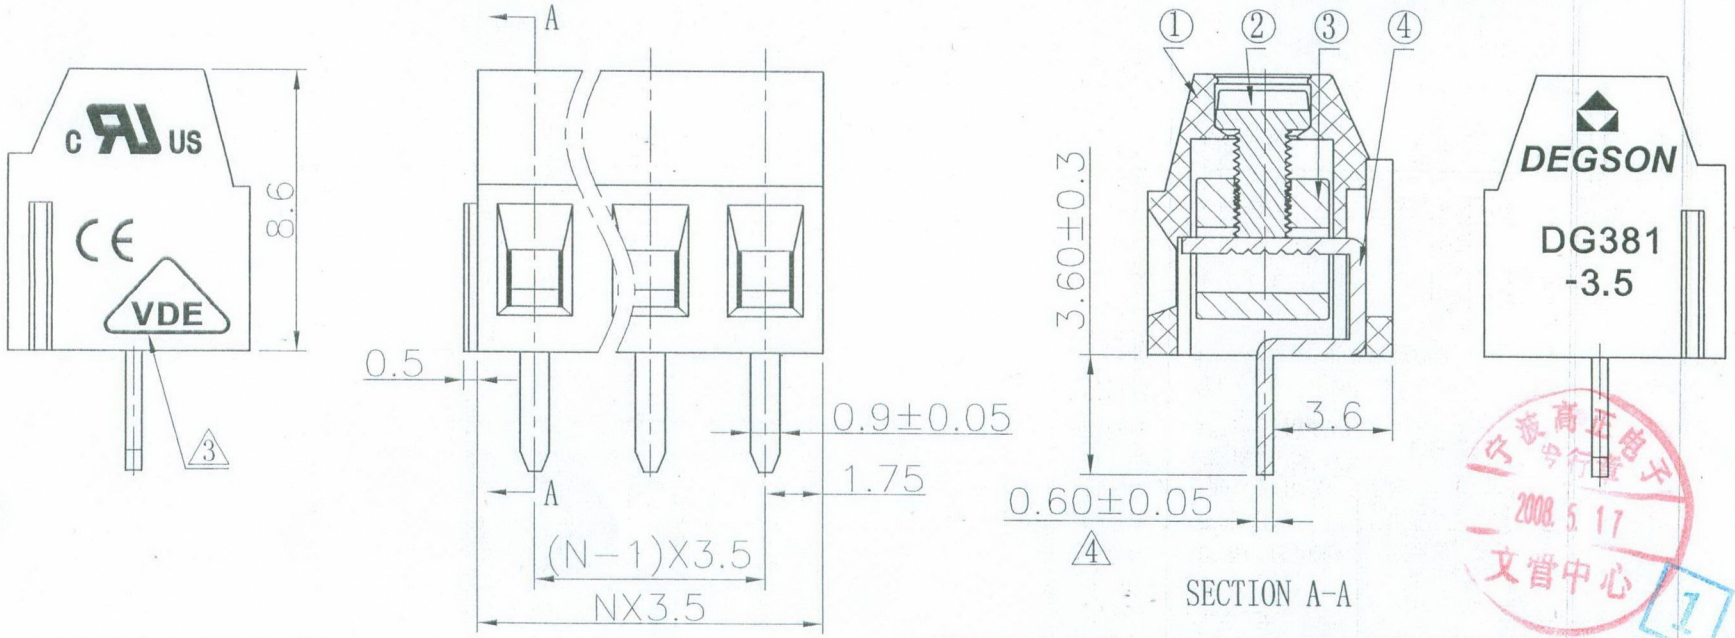

SECTION A-A

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	DG381-3.5-Housing	4032A0YXXA(H)	1	PA66	UL94V-0

4	DG381 Pin header	4047B00010(H)	XX	Phosphor bronze	SnCe
3	DG381 Cage	X000000300(H)	XX	Brass	Ni plated
2	DG381 Screws	S000001440(H)	XX	Steel	$Cr^{3+}Zn$

DETACHED LISTS

MM (INCH)

TOLERANCES EXCEPT AS NOTED

MM	
.0 ±	±
.00 ±	±
.000 ±	±

ANGLES ± 1°

THIRD ANGLE PROJECTION

DFTO Haoyh DATE 05/16/05"
CHKD Hang DATE 05/17/08"
MFO DATE
APPVL DATE 05/17/08

MATERIAL :
G.E : Series DG381-3.5
FINISH :
SCALE :

DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD

NAME DG381-3.5-XXP-1Y-00A(H)

DRAWING NO. DG381-3.5-E02 /PART NO.

SIZE A3 REV T4 05/17/08"

DO NOT SCALE DRAWING SHEET 1 OF 1

文管中心 2008.5.17

\Degson-wenguan\010 文管中心查收图面\DG381-3.5(修改焊脚料厚).dwg, 2008-5-17 14:04:05, Owner