

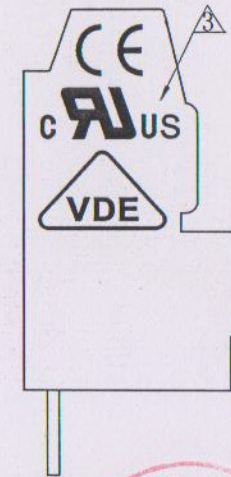
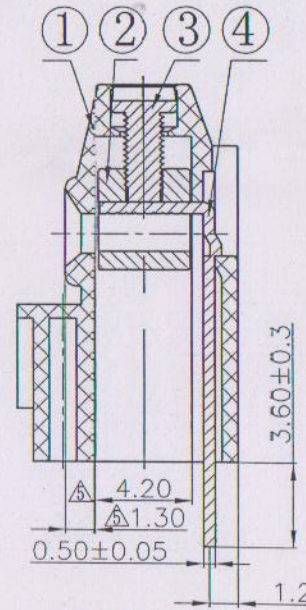
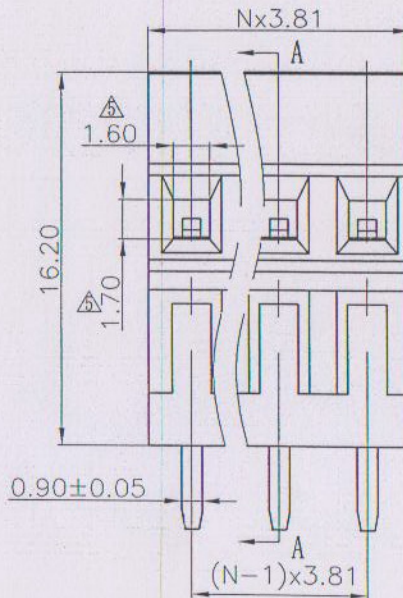


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		Drawing Revise	Haoyh	03/06/06
△		增加UL刻字	CSX	10/10/06
△		增加VDE刻字	CSX	10/19/07
△		品名、料号增加环保标示“(H)”	CSX	12/10/07
△		按客户要求增加尺寸标注	LJH	04/25/08
△	11-0043	依实物更新图面	Golden	03/14/11

Notes:

1. Pitch: 3.81mm, Poles: 2-16P
2. Rated voltage/current: UL 150V/10A  
VDE 130V/10A
3. Operation temperatures: -40°C ~ +105°C
4. Withstanding Voltage: AC2000V/1Min
5. Insulation Resistance: 5000MΩ/DC1000V
6. Wire Range: 26~16AWG, 1.0mm<sup>2</sup>
7. Max. Torque Value: M2, 2.04kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
	over 6 to 10	over 10 to 24	over 30 to 30	over 60 to 60	over 100 to 150	over 150		
to 6	to 10	to 24	to 30	to 60	to 150	to 150	∩	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

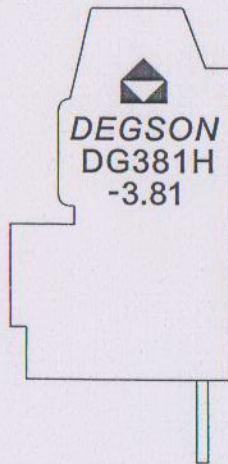

4	DG381H Pin header	4033B00010(H)	XX	Phosphor bronze	SnCe
3	DG381 Screws	S000001440(H)	XX	Steel	Cr <sup>3</sup> Zn
2	DG381 Brass cage	X000000300(H)	XX	Brass	Ni plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG381H-3.81-Housing	4033AC12XA(H)	1	PA66	UL94V-0

MM (INCH)	DFTO longxc	DATE 03/25/04	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
TOLERANCES EXCEPT AS NOTED	CHKD HXG	DATE 03/14/11	
MN	MFO	DATE 03/15/11	
.0 ±	APPVL Hang		
.00 ±			MATERIAL:
.000 ±			G.E.:
ANGLES ± 1°			FINISH:
THIRD ANGLE PROJECTION			SCALE:

NAME: DG381H-3.81-XXP-1Y-00A(H)	
DRAWING NO. DG381H-3.81-E01	SIZE A3
/PART NO.	REV T5 13/14/11
DO NOT SCALE DRAWING	SHEET 1 OF 1