D1RFRD006

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
1		修改刻字	Yoj	05/11/07
2	09-0115	增加CQC刻字	GHY	11/28/09

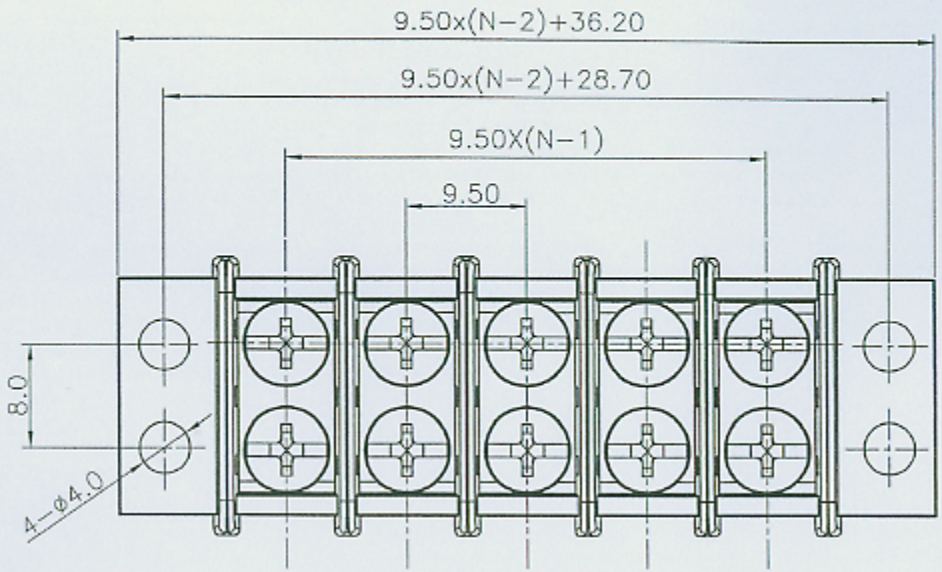

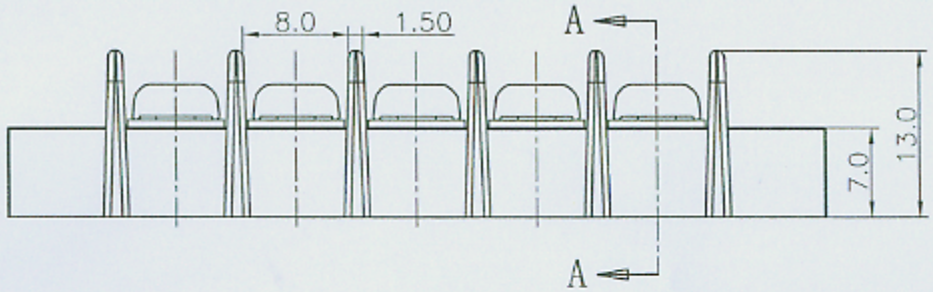

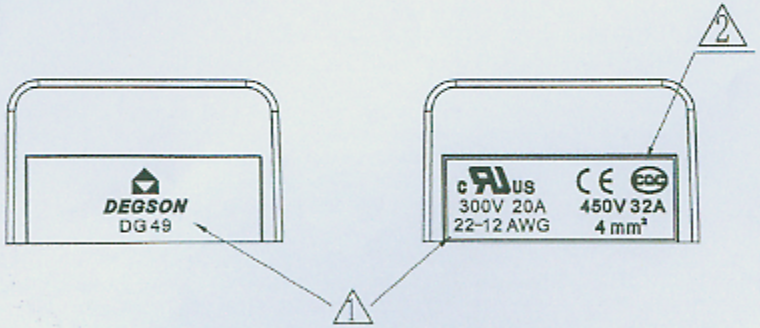

Notes:

1. Pitch:9.5mm ,Poles:2-24P
2. Rated voltage/current:UL 300V/20A
   IEC 250V/32A
3. Operation temperatures:-40℃~+80℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC500V
6. Wire Range:22~12AWG,4mm²
7. Max. Torque Value:M3.5,8.16kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200	over 200 to 480	
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7	DIN/ISO



SECTION A-A

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	DG49"+" Screw	S000000770(H)	2XX	Steel	Ni-Plated
2	DG49 Pin	5022B00040(H)	XX	Brass	Tin-Plated
3	DG49 Housing	5022M0YXXA(H)	1	PC	UL94V-2

DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD

NAME DG49-A-XXP-1Y-00A(H)

DRAWING NO. DG49-E04 /PART NO.

SIZE A3 REV T2 11/28/09

DO NOT SCALE DRAWING SHEET 1 OF 1

DFTD Hema DATE 04/01/06
CHKD wy DATE 12-1-07
MFG DATE
APPR. Hema DATE 12/01/07

MATERIAL :
G.E :
FINISH :
SCALE : 1:1

TOLERANCES EXCEPT AS NOTED
MM (INCH)
.0 ± ±
.00 ± ±
.000 ± ±
ANGLES ± 1°
THIRD ANGLE PROJECTION

DEVIATED LISTS

宁波高正电子有限公司 发行章 2011.12.01 文管中心

B C D E F G H
A
8 7 6 5 4 3 2 1