


REVISION RECORD				
REV	ECN	DESCRIPTION	DFT	DATE

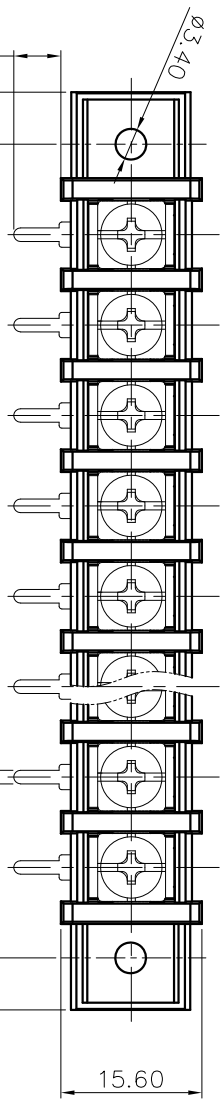


NOTES1:
UL Standard

- 1.Rated voltage/current : 300V / 20A
- 2.Torque value : M4 , 10.53Lb.in
- 3.Wire range : 22~12AWG


NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 10.0mm, Poles : N=02~24P
- 3.Withstanding voltage : AC1600V/1Min
- 4.Operating temperature: -40℃~+105℃
- 5.Undimensioned tolerances:

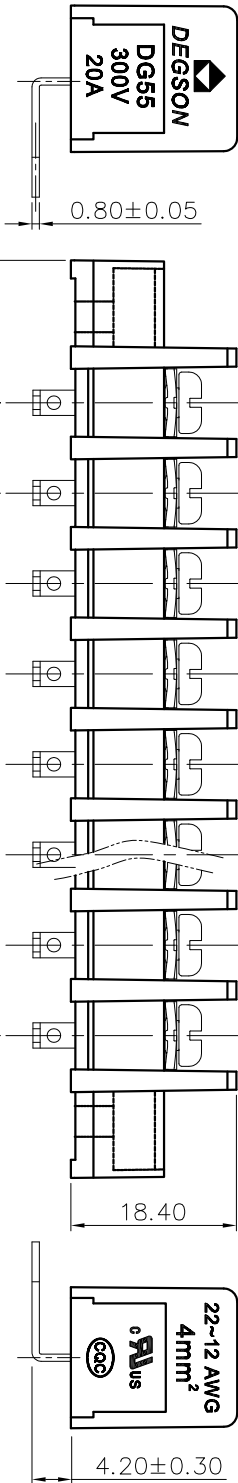

Pitch range in mm		Nominal dimension range in mm		Tolerance											
Over	6	10	TO	Over	6	10	TO	Over	6	10	TO				
6	10	24	30	60	100	150	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

6.RoHS Compliance

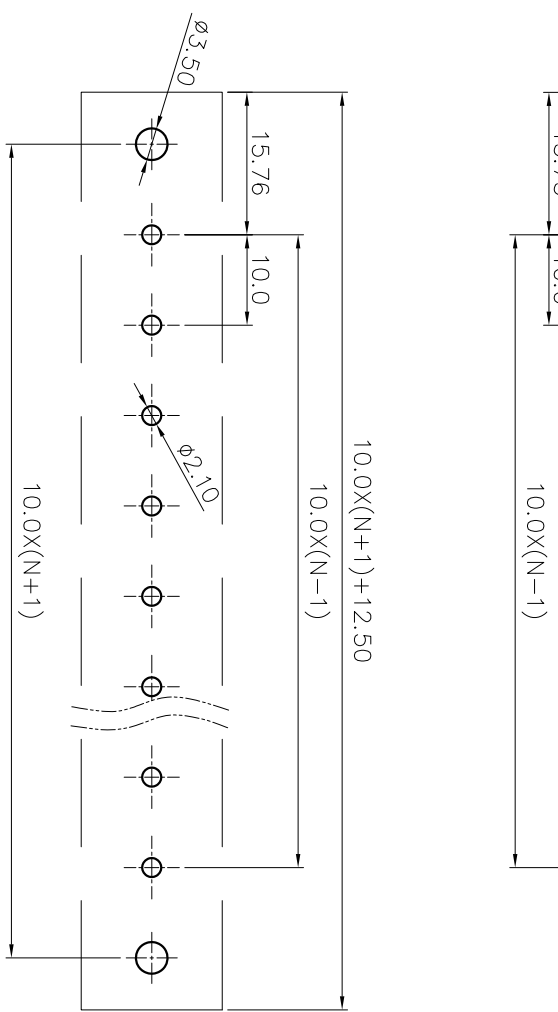

DG55R-A - XXP - 1Y - 00A (H)
(Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS				
PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO.,LTD	
APPD:	/	NAME:	DG55R-A-XXP-1Y-00A(H)	
CHKD:	/	TITLE:	CUSTOMER DRAWING	
DFT:	/	DRAWING NO.:	DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION		SCALE	1:1	