


Normal Geometric Tolerancing			
—	//	≡	⊥
0 to 100	0.2	0.3	0 to 10
over 100 to 150	0.3		over 10
over 150	0.5		0.3
Total Pitch Tolerances		Normal dimension Tolerances	
0<U<=30	±0.20	0<U<=30	±0.25
30<U<=53	±0.25	30<U<=53	±0.30
53<U<=70	±0.30	53<U<=70	±0.35
70<U<=90	±0.35	70<U<=90	±0.44
90<U<=115	±0.44	90<U<=115	±0.55
115<U<=150	±0.55	115<U<=150	±0.70
150<U<=200	±0.70	150<U<=200	±0.85
200<U<=250	±0.85	200<U<=250	±1.00
250<U<=320	±1.00	250<U<=320	±1.20

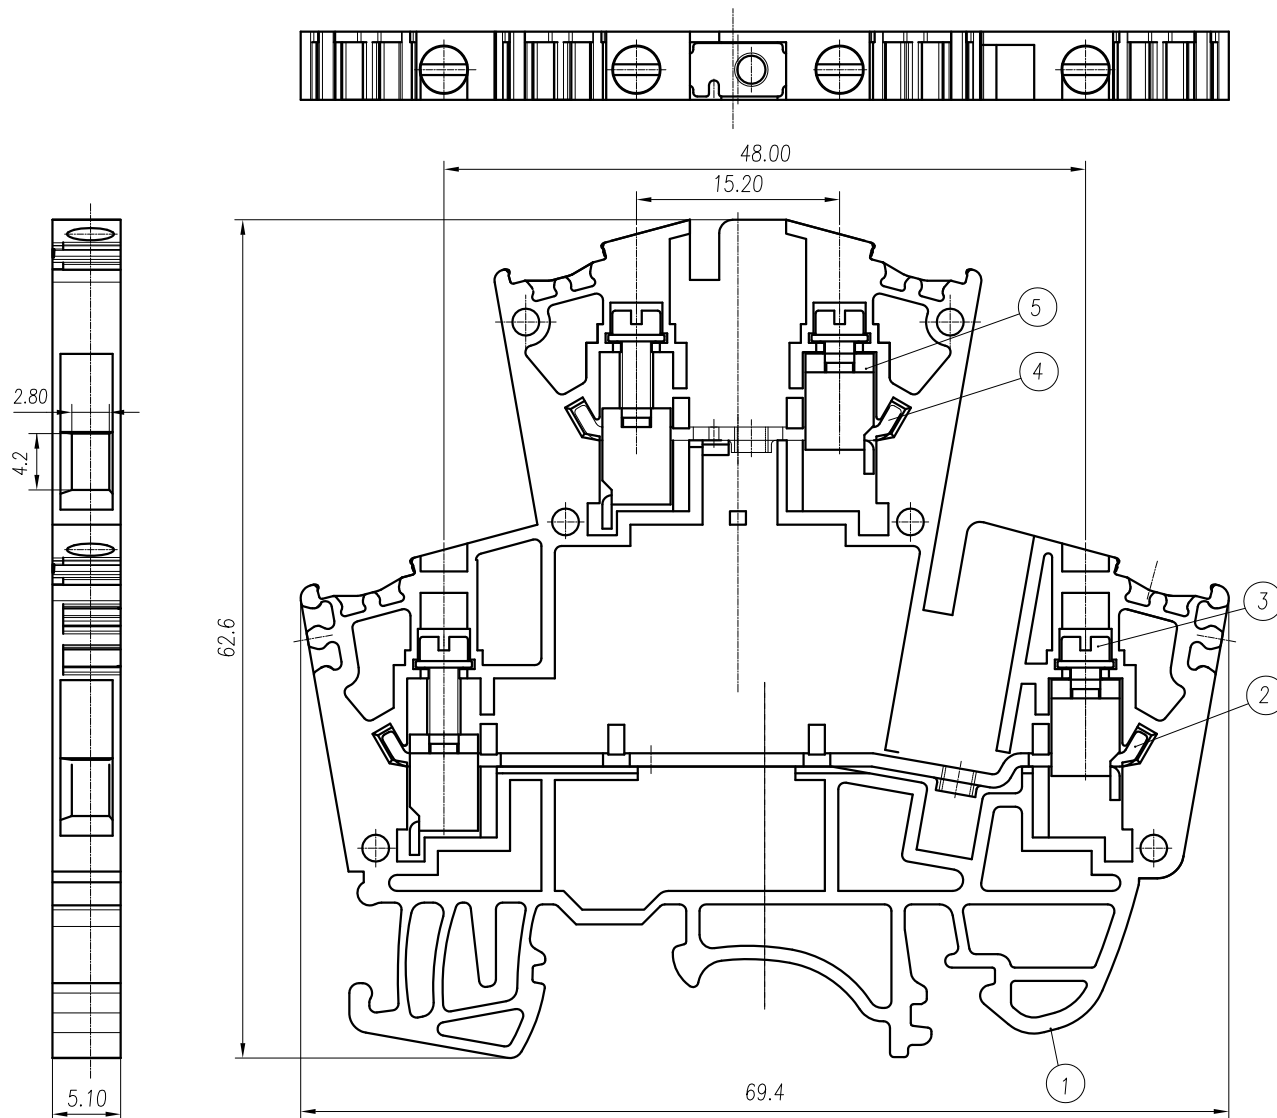

- NOTES 1:
- UL Standard :
- Rating: 300V 20A
 - Insulation Withstands Voltage: AC 2000V at 1 minute
 - Using Temperature Range: -40°C~+115°C
 - Screw Torque Value: 0.4N·m
 - Suitable Electric Wire: AWG 22~12
- IEC Standard:
- Rating: 400V 24A
 - Rate Impulse Voltage: 6000V
 - Insulation Resistance: 500MΩ or more at DC500V
 - Material Group:I
 - Pollution Degree: 3
 - Overvoltage Category: III
 - Using Temperature Range: -40°C~+120°C
 - Screw Torque Value: 0.4N·m
 - Suitable Electric Wire: 0.5~2.5mm²

- NOTES 2:
- RoHS compliance
 - Strip Length: 6mm

5	WIRE CAGE	STEEL	Zn Plated
4	CONDUCTOR1	COPPER ALLOY	Tin Plated
3	SCREW	STEEL	Zn Plated
2	CONDUCTOR2	COPPER ALLOY	Tin Plated
1	HOUSING	PA	UL94-V0 GRAY
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	ZDF	DATE	2021.08.24	UNITS	mm	SHEET/OF	1/1
CHK.	Lj.Liang	DATE	2021.08.24	SCALE	2.5:1		
APP.	Webb.Liu	DATE	2021.08.24	NAME	DKK2.5		
REV.	CONTENT	CHK.	DATE	DINKLE ENTERPRISE CO.,LTD	DWG NO.	SP-03-DKK25000	

REV.	CONTENT	CHK.	DATE
------	---------	------	------