
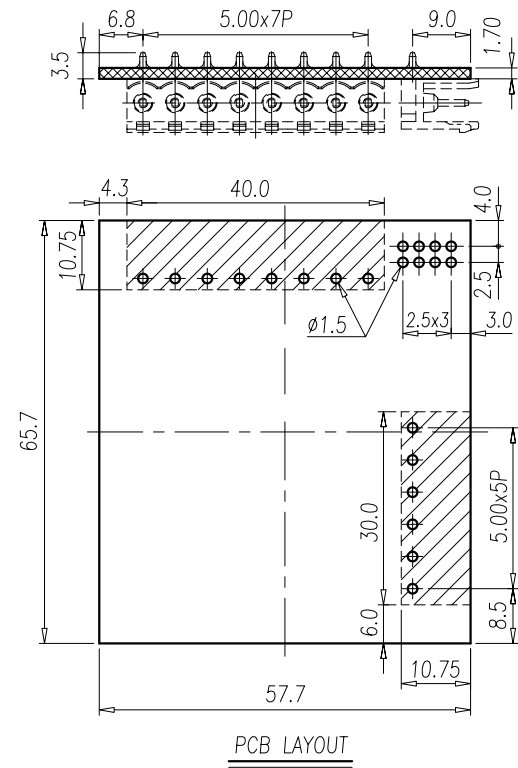
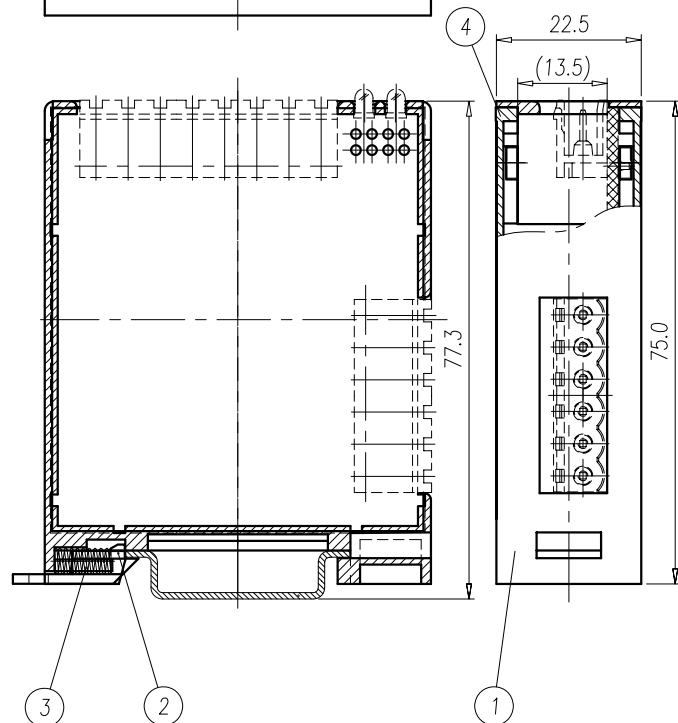
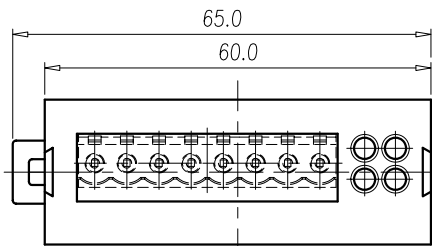
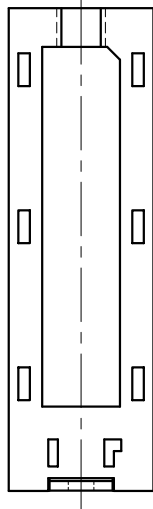


NOTES:

1. Rating: 250V 15A
2. Insulation Withstands Voltage: AC 2000V/MIN
3. Insulation Resistance: 500MΩ or more at DC500V
4. Using Temperature Range: -40°C~+105°C
5. 請將外殼的頭部、底部改成噴砂面
6. RoHS Compliance

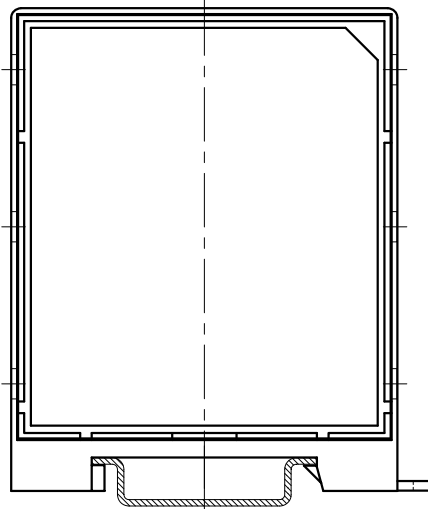

Normal Geometric Tolerancing					
	-	//	≡	⊥	
0 to 100	0.2			0 to 10	0.2
over 100 to 150	0.3		0.3	over 10	0.3
over 150	0.5				

Normal dimension Tolerances	
0~30	±0.25
over 30~53	±0.30
over 53~70	±0.35
over 70~90	±0.44
over 90~115	±0.55
over 115~150	±0.70

4	COVER	PA66	UL94-V0 GREEN
3	SPRING	STAINLESS STEEL	
2	CLAMP1	PA66	UL94-V0 ORANGE
1	HOUSING(22.5)	PA66	UL94-V0 GREEN
ITEM	NAME OF PART	MATERIAL	NOTES

DWG.	Hgx	DATE	09.08.26	UNITS	MM	SHEET/OF	1/1
CHK.		DATE		SCALE	1.2:1(:)		
APP.		DATE		NAME		DMUG-22	
				DINKLE ENTERPRISE CO.,LTD		DWG NO. SP-03-DMUG2200	

REV.	CONTENT	CHK.	DATE