
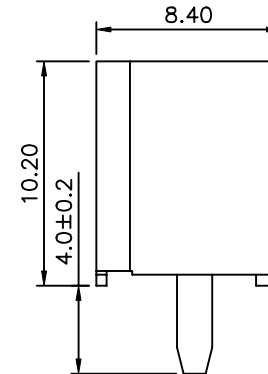
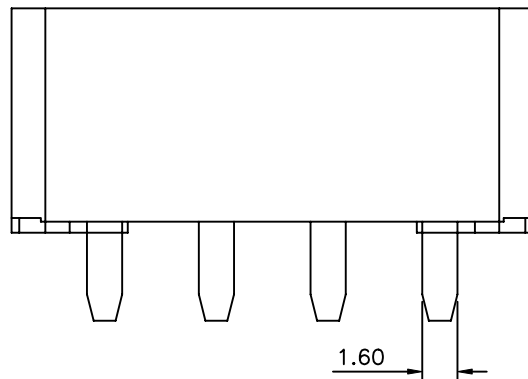
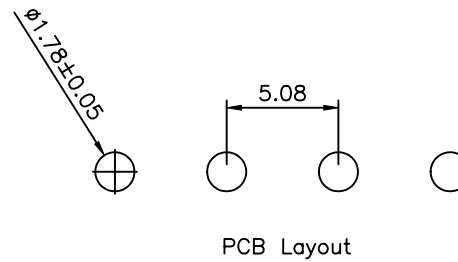


**SPECIFICATION**

Current Rating:5A AC/DC  
 Voltage Rating:250V AC  
 Insulation Resistance:1000Megaohms Min.  
 Withstand Voltage:1500V AC/Minute  
 Temperature Range:-25°C~+105°C  
 Insulator:Nylon 66 UL94V-2  
 RoHS Compliant

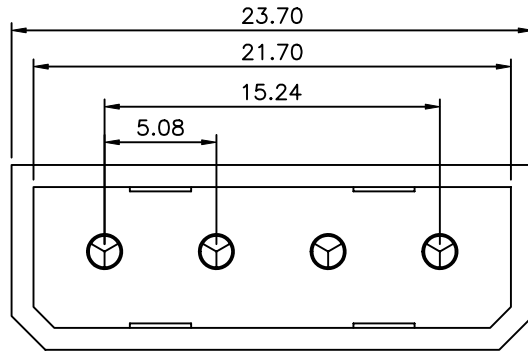

⚠	AUK P/N	Color
	DP04PD-H	Natural
	DP04PD-BK-H	Black

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.50 .XX ±0.25 .XXX ±0.10 ANG: ±2°
PART No. ⚠ DP04PD-XX-H		CHECKED BY SHIN		
DRAWING No. DP04PD-XX-H		DRAWING BY INGRID		
SCALE	NONE	REV.	A1	
				UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠ A1		Modify P/N:DP04PD-H-->DP04PD-XX-H	HZF	03/11/2009
⚠ A0		NEW RELEASE	SHIN	07/18/2007