




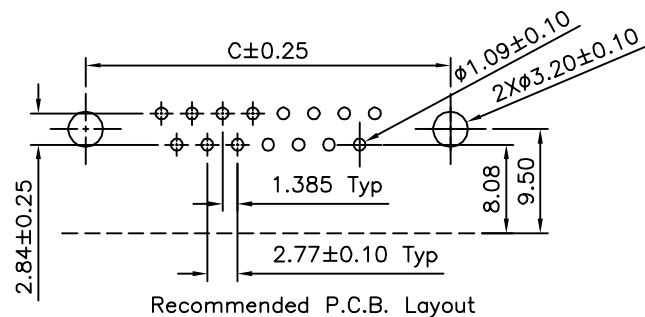


SPECIFICATION

⚠ Current Rating: 1 Amps
 Withstanding Voltage: 1000V (One Minute)
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 At 500V DC
 Operating Temperature: $-50^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Shell: SPCC, Nickel Plated
 Insulator: PBT+30%G.F. (UL94V-0)
 Contact: Brass, Gold Flash On Contact Area,
 Tin Plated On Solder Tails, Over Nickel
 Z Flake: SPCC, Tin Plated
 Screw: 12L14, Nickel Plated
 RoHS Compliant

DR XX P - XX - H
 (1) (2) (3) (4) (5)

- (1) DR: D-SUB DIP Right Angle
 (2) XX: No. Of Position
 (3) P: Male Boardlock With 2 Jackscrew
 4#40 Installed
 (4) XX: Insulator Color
 Blank: Black
 BL: Blue
 (5) H: RoHS Compliant

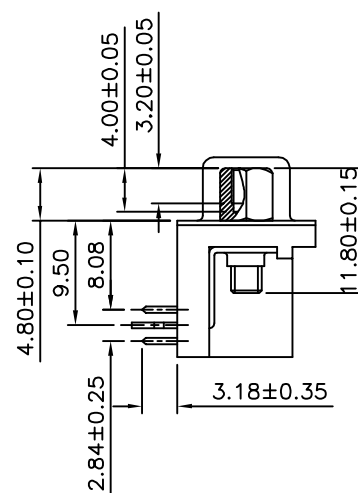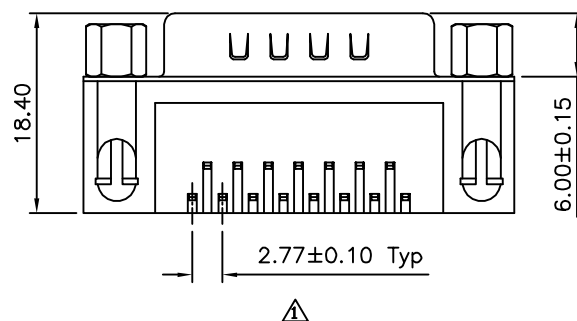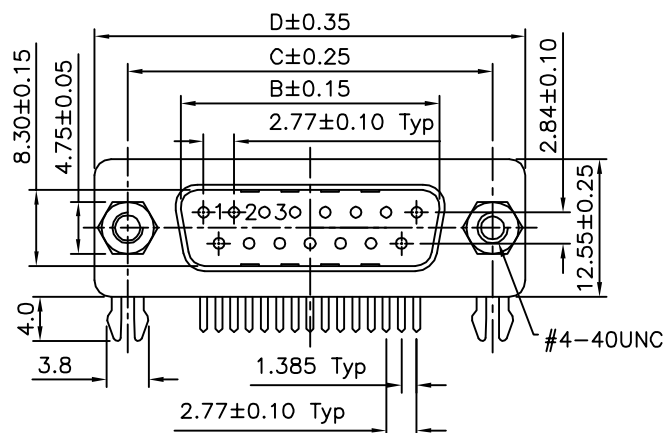

Pin	B	C	D
09	16.92	24.99	30.81
15	25.25	33.32	39.20
25	38.96	47.04	53.04
37	55.42	63.50	69.40

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

PART No.

DRXXP-XX-H

CHECKED BY

HZF

DRAWING No.

DRXXP-XX-H

DRAWING BY

SONG

SCALE

NONE

REV.

B1

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

B1

Modify Data

HZF

02/24/2014

B0

Modify P/N: DRXXP-H
 --> DRXXP-XX-H

HZF

08/07/2013

B0

NEW RELEASE

HZF

08/07/2013