
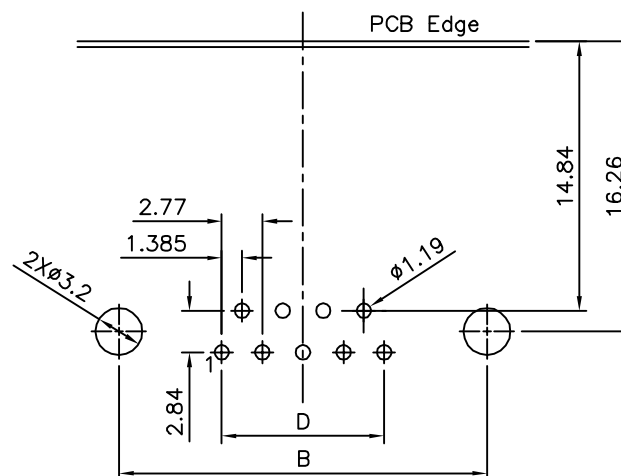
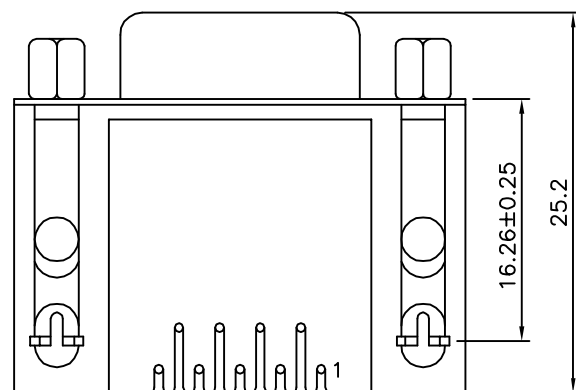
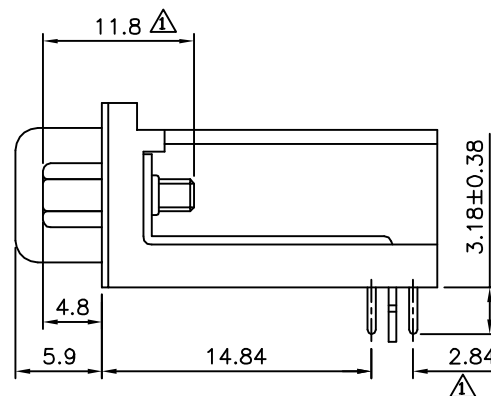


△ SPECIFICATION

Current Rating:5 Amp
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:15 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Operation Temperature Range:-55°C~+105°C
 Insulator:PBT(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash Over Nickel
 Shell:Steel,Nickel Plated
 Boardlock:Brass,Tin Plated
 Screw:Zinc Alloy,Nickel Plated
 RoHS Compliant

△△ DRL XX S - H
 (1) (2) (3) (4)

- (1) DRL:D-SUB DIP Right Angle
 Footprint=14.84mm
 (2) XX:No. Of Position
 (3) S:Female
 (4) H:RoHS Compliant

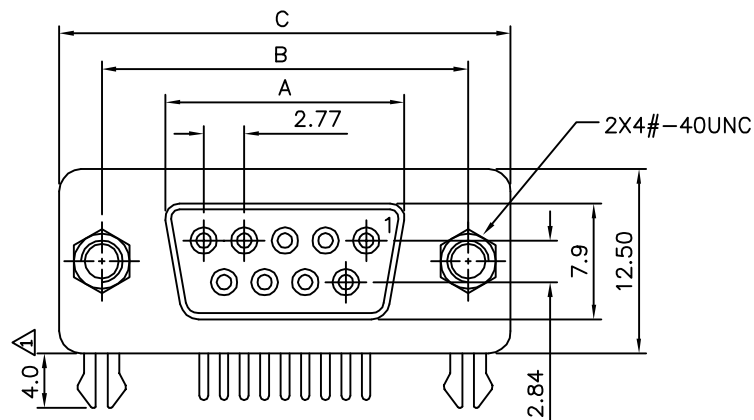

Recommended P.C.B. Layout

△ Pin	A±0.20	B±0.20	C±0.38	D
09	16.30	25.00	30.80	11.08
15	24.60	33.30	39.20	19.39
25	38.35	47.05	53.05	33.24
37	54.80	63.50	69.40	49.86

AUK

A MEMBER OF AUK GROUP

太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

CATEGORY	APPROVED BY	MEI
PART No. △△ DRLXXS-H	CHECKED BY	HZF
DRAWING No. DRLXXS-H	DRAWING BY	WSS
SCALE NONE	REV.	A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 .XXX ±0.05
 ANG. ±1°



NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify	P/N:DRLXXSG-H -->DRLXXS-H	HZF	10/21/2011
△ A1	Modify	P/N:DRLXXS-H -->DRLXXSG-H	HZF	06/17/2011
△ A0	NEW RELEASE		HZF	11/18/2005