

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/03/06'		LJC 07/03/06'
B	ADD P/N CODE ②	JLZ 02/11/15'		

NOTES:

- ELECTRICAL:
  - Current rating:3Amps/contact max.
  - Contact resistance:≤20mΩ/contact.
  - Insulation resistance:≥1000MΩ at V=100V.
  - Operating voltage:60V AC/DC.
- PRODUCT NUMBER CODE:

DS1002-09 - X X X X X




Bend type(For single row SMT only) ②  
 A: R1  
 B: R2

CLIP PLATING  
 1: Tin 150u"  
 2: Tin 200u"  
 3: G/F  
 4: Gold 3u"  
 5: Gold 10u"  
 6: Gold 15u"





PIN PLATING  
 1: Tin 150u"  
 2: Tin 200u"  
 3: G/F  
 4: Gold 3u"  
 5: Gold 10u"  
 6: Gold 15u"

MOUNTING TYPE  
 R: R/A TYPE  
 S: SMT TYPE

No.OF CONTACTS  
 1\*1 to 1\*40  
 2\*2 to 2\*40

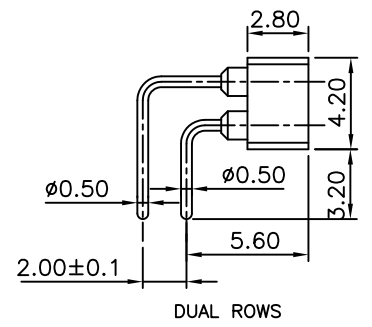

R/A TYPE

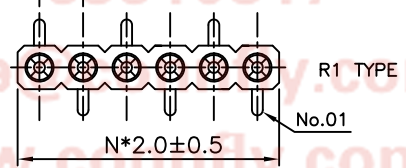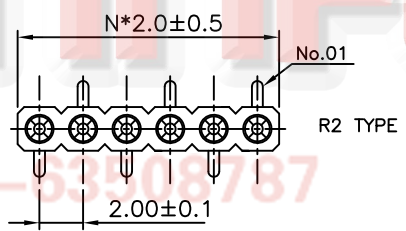

SMT TYPE

CONNFLY  
 Tel: 86-574-63508787  
 Fax: 86-574-65510817  
 E-mail: sales@connfly.com  
 http://www.connfly.com  
 Add: East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1002-09-XXXXXX-B		

PROJECTION	TITLE
	IC SOCKET R/A & SMT TYPE PITCH 2.00mm
UNITS	mm
SHEET SIZE	A4
SERIES	DS1002-09 SERIES

晨翔电子有限公司  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**