

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/05/17'	~	

NOTES:



1. SPECIFICATIONS:

- 1.1 CONTACT RESISTANCE: 20mΩ Max.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 1000MΩ Min.
- 1.4 OPERATING TEMPERATURE: -40°C~+105°C.
- 1.5 MALE PIN RANGE: $\phi 0.381 \sim 0.50$.
- 1.6 CURRENT RATING: 1.0A Per Pin Max.


2. PRODUCT NUMBER CODE:

DS1002-13 - X_X_X_X

- Pin Type(Dim L)
1: Type 1(L=6.4mm)
- Clip plating
1: Tin 150u" 2: Tin 200u"
3: G/F 4: Gold 3u"
5: Gold 10u" 6: Gold 15u"
- Pin plating
1: Tin 150u" 2: Tin 200u"
3: G/F 4: Gold 3u"
5: Gold 10u" 6: Gold 15u"
- No. of contacts
2*2 - 2*50

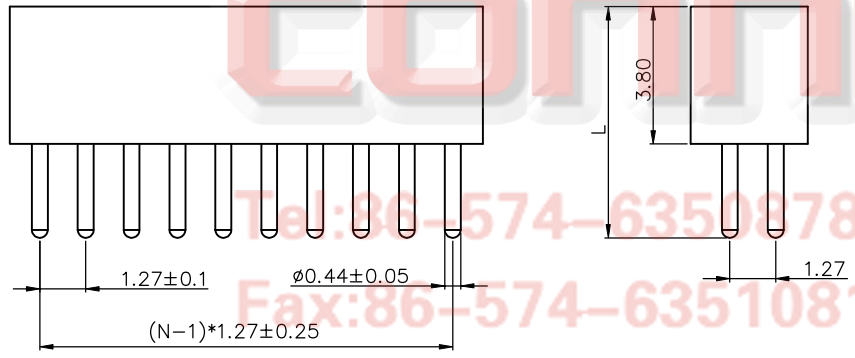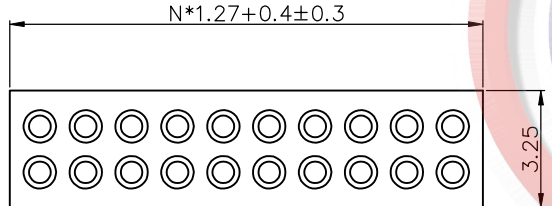

N=No. of contacts/2

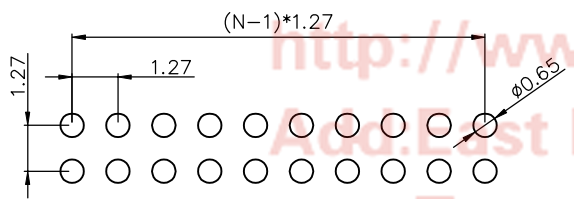


Recommended PCB Layout

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	10F1
DRAWING NO.	C-DS1002-13-XXXX-A		

PROJECTION		TITLE	1.27mm IC SOCKET(Machine Pin) DIP Type H=3.8mm
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1002-13 SERIES

晨翔电子有限公司
CONNFLY® CONNFLY ELECTRONIC CO., LTD

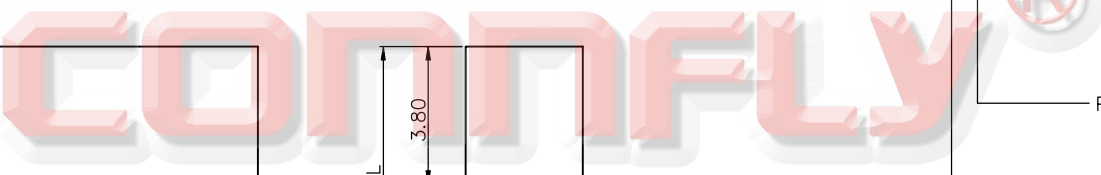

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo, China
 P.C: 315333