


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of this information in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

Dept	Qty	REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
DC	1	A	NEW RELEASE	JLZ 11/09/23'	~	
ED	1					
IE	1					
ISO	1					
PD	1					
R&D	1					
SD	1					
QA	1					
QC	1					
QF	1					

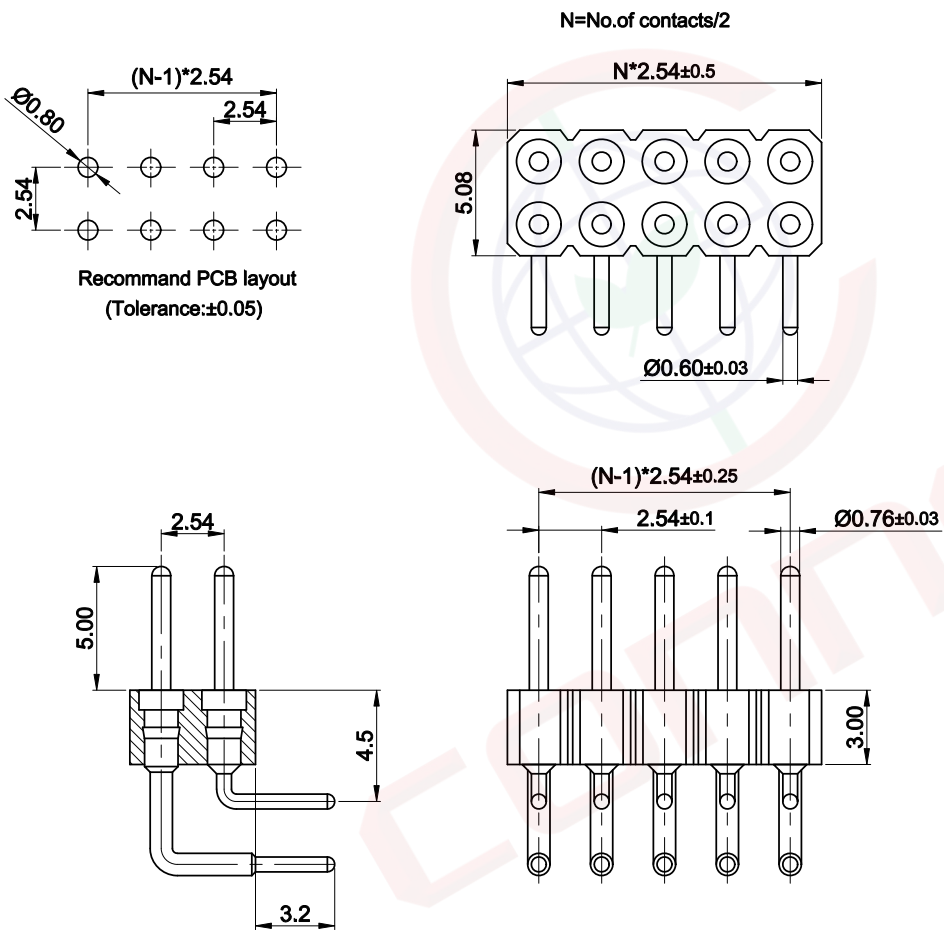

**Notes:**

**Specifications:**

1. Contact Resistance: 20mΩ Max.
2. Insulation Resistance: 1000MΩ Min.
3. Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
4. Current Rating:3A.
5. Temperature: -40°C~+105°C.

**Materials:**

1. Contact Material: Copper Alloy.
2. Contact Plating: Tin or Gold Plating Over Nickel.
3. Insulator Material: PPS,Black,UL94-V0.

**Product Number Code:**  
 DS1004-05 - X X X

- Pin plating  
 1: Tin 150u" 2: Tin 200u"  
 3: G/F 4: Gold 3u"  
 5: Gold 10u" 6: Gold 15u"
- Housing color  
 B: Black
- No.of contacts  
 2x2 - 2x40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm Strip Adaptor R/A Type H=3.0
X.	±0.60	X.	±5°	UNITS	mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1004-05 SERIES
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNELY CONNELY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1004-05-XXX-A					