


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		LJC 04/27/05'
B	ADD P/N CODE	LJC 12/12/13'		LJC 12/12/13'
C	DRAWING UPDATE	JLZ 08/24/18'		

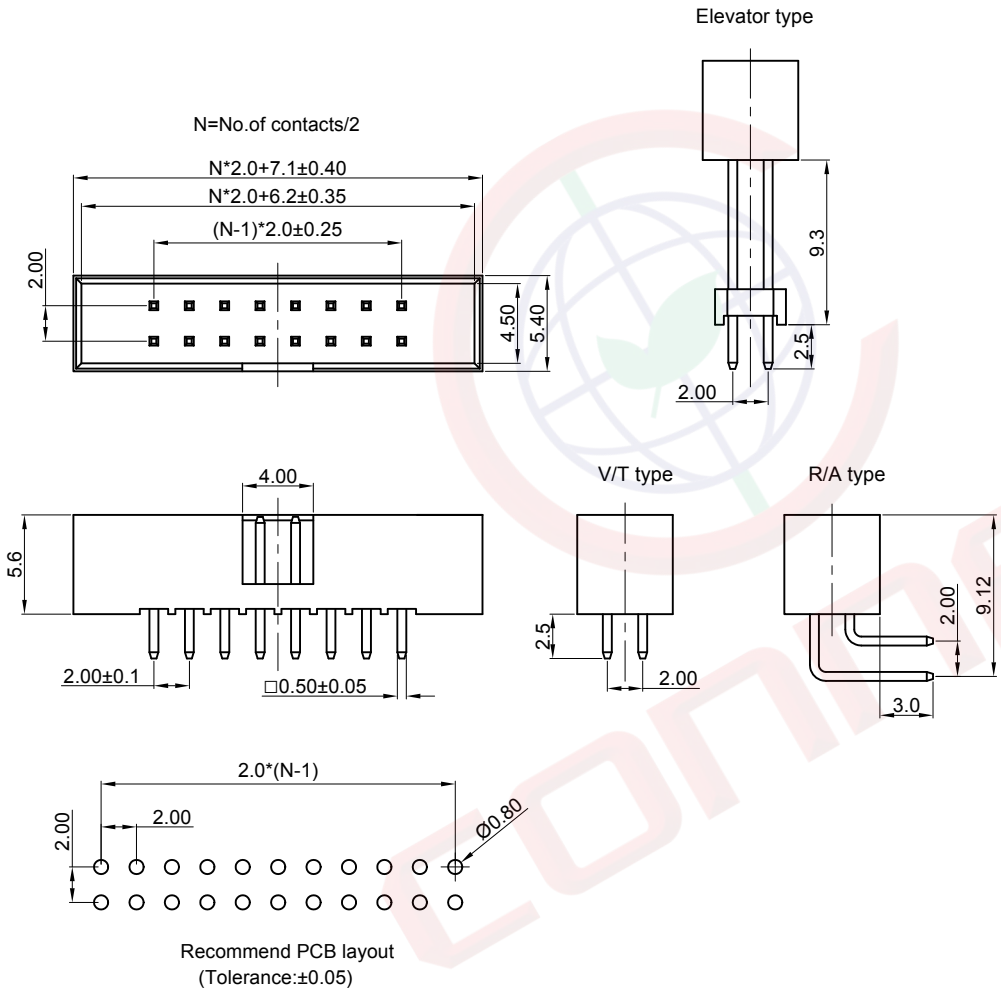

NOTES:

- Material
 - 1.1 Insulator: Thermoplastic(PA-9T UL 94V-0).
 - 1.2 Contact: Copper alloy.
- Specification
 - 2.1 Temperature: -40°C~+105°C.
 - 2.2 Contact resistance: 20mΩ max.(initial).
 - 2.3 Insulation resistance: 1000MΩ min.
 - 2.4 Dielectric withstanding voltage: AC 500V per minute.

3. Product number code:

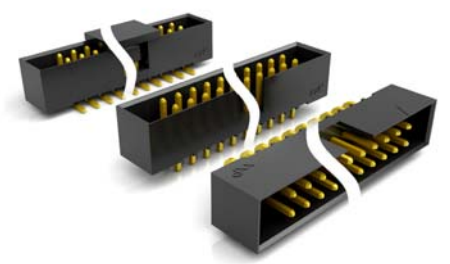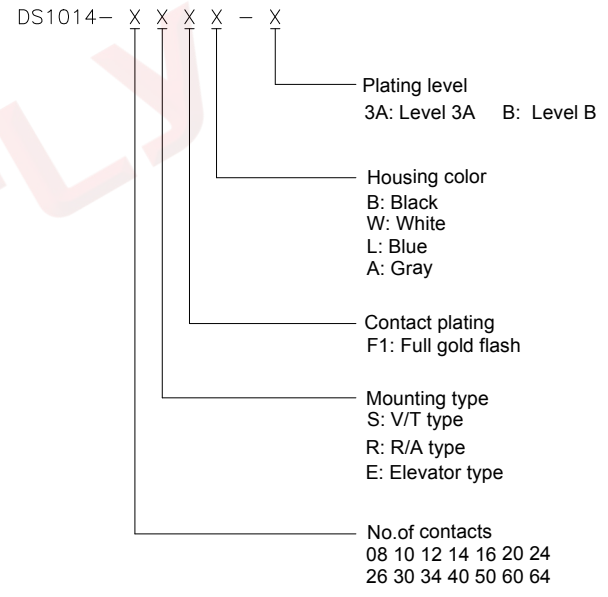


(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.0mm BOX HEADER	
.X	±0.38	.X	±3°	SHEET SIZE	A4	V/T, R/A & ELEVATOR TYPE	
.XX	±0.25	.XX	±2°			SERIES	DS1014 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1014-XXXX-X-C					

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		LJC 04/27/05'
B	ADD P/N CODE	LJC 12/12/13'		LJC 12/12/13'
C	DRAWING UPDATE	JLZ 08/24/18'		

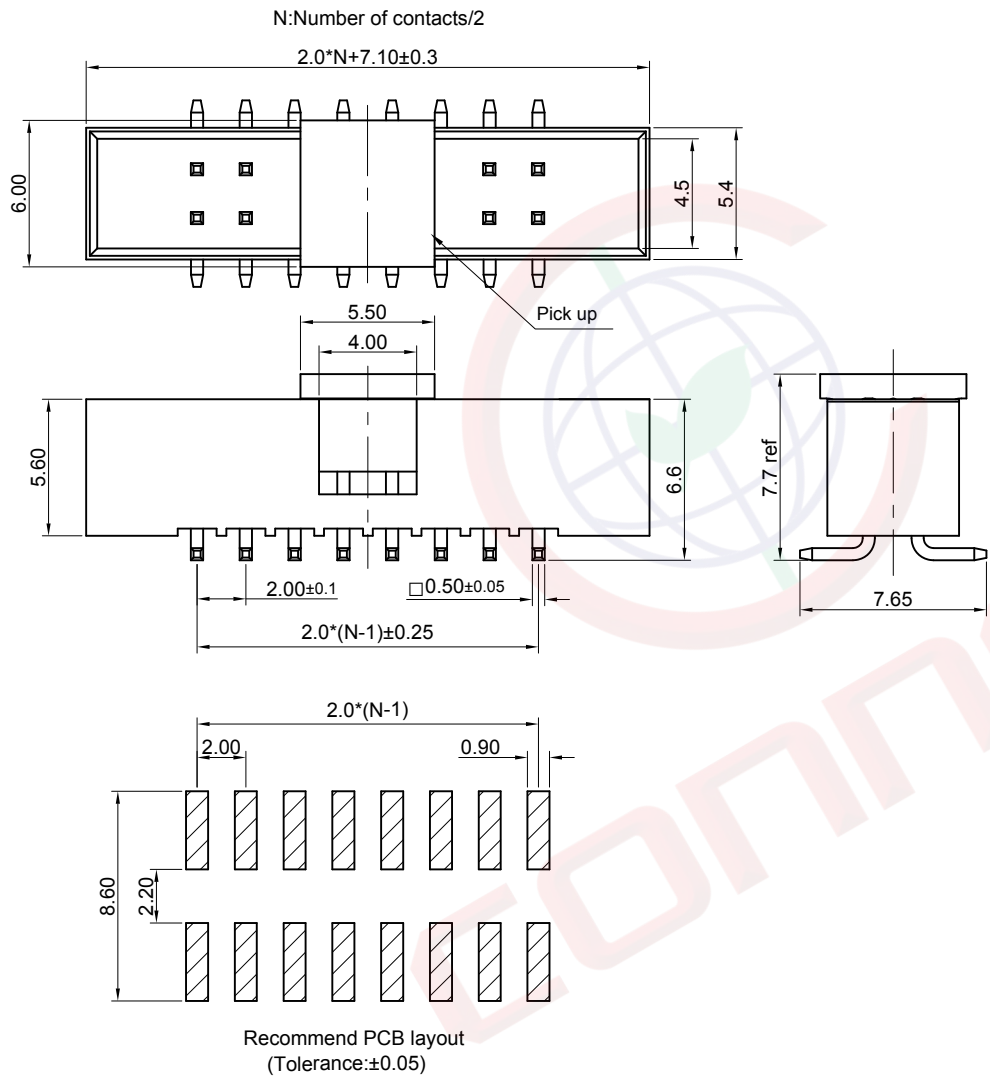

NOTES:

- Material
 - Insulator: High temperature(PA-9T UL 94V-0).
 - Contact: Copper alloy.
- Specification
 - Temperature: -40°C~+105°C.
 - Contact resistance: 20mΩ max.(initial).
 - Insulation resistance: 1000MΩ min.
 - Dielectric withstanding voltage: AC 500V per minute.
- Product number code:

DS1014 - X X X X X X - X

 - Plating level
 - 3A: Level 3A
 - B: Level B
 - Packing type
 - T:Tray
 - R:Tape on reel
 - B:Tube
 - Pick up support
 - S:W/ Pick up
 - X:W/O Pick up
 - Housing color
 - B: Black
 - W: White
 - L: Blue
 - A: Gray
 - Contact plating
 - F1: Full gold flash
 - Mounting type
 - M: SMT type
 - No. of contacts
 - 08 10 12 14 16 20 24
 - 26 30 34 40 50 60 64



(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1014-XXXX-X-C		

PROJECTION		TITLE	2.0mm BOX HEADER
UNITS	mm	V/T, R/A & ELEVATOR TYPE	
SHEET SIZE	A4	SERIES	DS1014 SERIES

晨翔电子有限公司
CONNFLY ELECTRONIC CO. LTD