



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 03/11/11'	~	

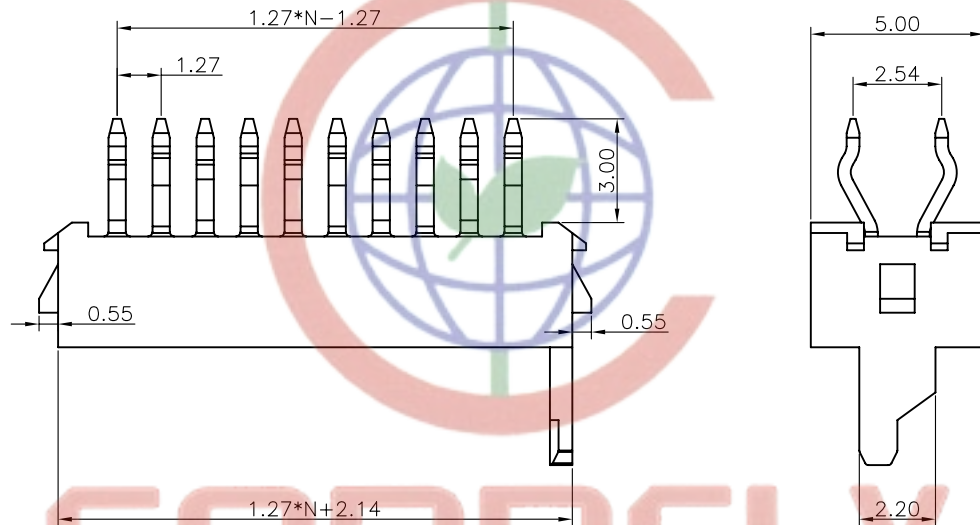

NOTES:

- MATERIAL
  - INSULATOR:THERMOPLASTIC(UL 94V-0).
  - CONTACT: COPPER ALLOY.
- SPECIFICATION
  - TEMPERATURE RANGE:-40°C~+105°C.
  - CONTACT RESISTANCE:30mΩ max.
  - INSULATION RESISTANCE:1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PRODUCT NUMBER CODE:
 

DS1015-07- X X X

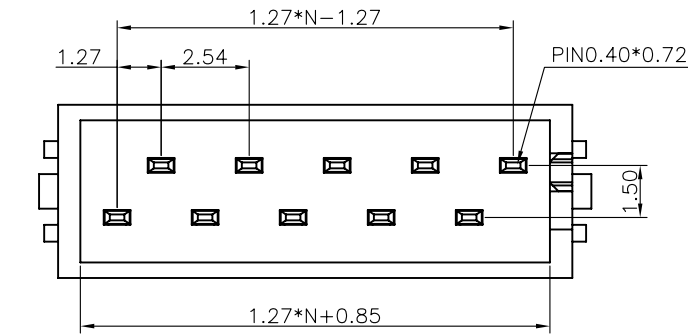

CONTACT PLATING  
 2: NICKEL + GOLD FLASH  
 6: Full Tin  
 8: Full GOLD FLASH

HOUSING COLOR  
 R:RED

No. OF CONTACTS  
 04 06 08 10 12  
 14 16 18 20 24



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	RED DIP SERIES
X.	±0.60	X.	±5°	UNITS	mm	(MICRO MATCH CONNECTOR)	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1015-07 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE		1:1	SHEET 1 OF 1				
DRAWING NO.		C-DS1015-07-XXX					