
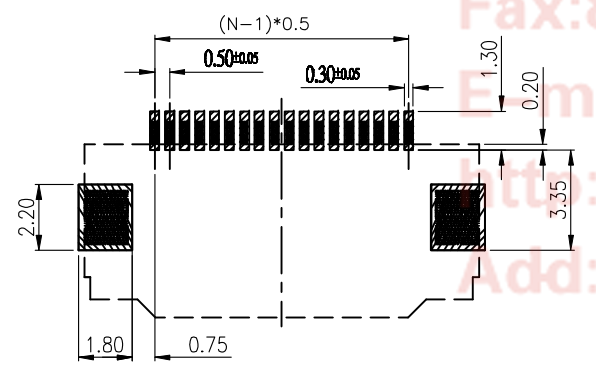
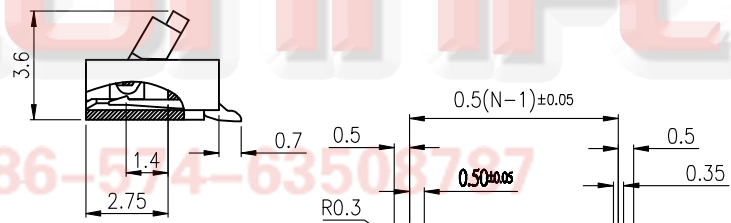
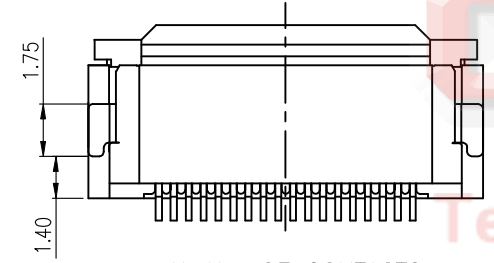

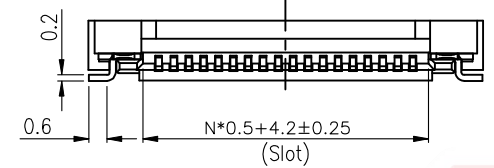


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 12/02/16'	~	

- NOTES:
- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
 - SPECIFICATION
 - TEMPERATURE:-25°C ~ +85°C.
 - CONTACT RESISTANCE:30mΩ max.
 - INSULATION RESISTANCE:100MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 100V PER MINUTE.
 - PRODUCT NUMBER CODE:
DS1020-20- X X X X X

- PACKING TYPE
- B: Tube
- R: Tape on reel
- CONTACT PLATING
- 6: Tin
- 8: Gold flash
- COVER COLOR
- B: Black
- HOUSING COLOR
- V: Ivory
- No. OF CONTACTS
- 04~64

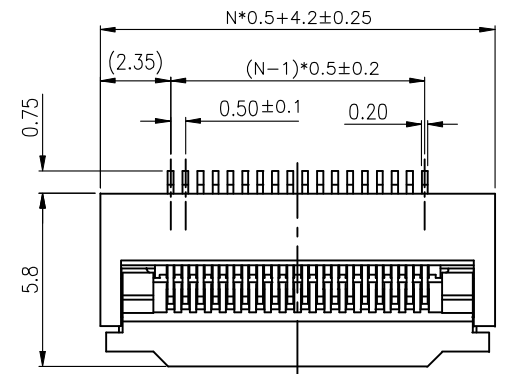

APPLICABLE FPC RECOMMENDED DIM. (THICKNESS: 0.3±0.03)

Tel:86-574-63503787
 Fax:86-574-6351111
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1020-20-XXXXXX-A		

PROJECTION		TITLE	0.50mm Easy On FPC CONN. H=2.0 SMT R/A TYPE
UNITS	mm	SERIES	DS1020-20 SERIES
SHEET SIZE	A4		

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD