


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QF	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document without the prior written consent of CONNELY may result in legal action. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays in exercising such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/10/21'		

Notes:  
 Specifications:  
 1. Contact Resistance: 30mΩ Max.  
 2. Insulation Resistance: 100MΩ Min.  
 3. Dielectric Withstanding Voltage: 100V AC(rms)  
 For 1 Minute.  
 4. Current Rating:0.5A Max  
 5. Voltage Rating:48V AC/DC Max  
 6. Temperature: -25°C~+85°C.  
 Materials:  
 1. Contact Material: Copper Alloy.  
 2. Insulator Material: Thermoplastic(UL 94V-0).

Product Number Code:  
 DS1020-30 - X X X X X  
 Packing type  
 B: Tube  
 R: Tape on reel  
 Contact plating  
 T1: Matt Tin  
 8: Gold flash  
 Cover color  
 B: Black  
 V: Ivory  
 No. of contacts  
 03-30

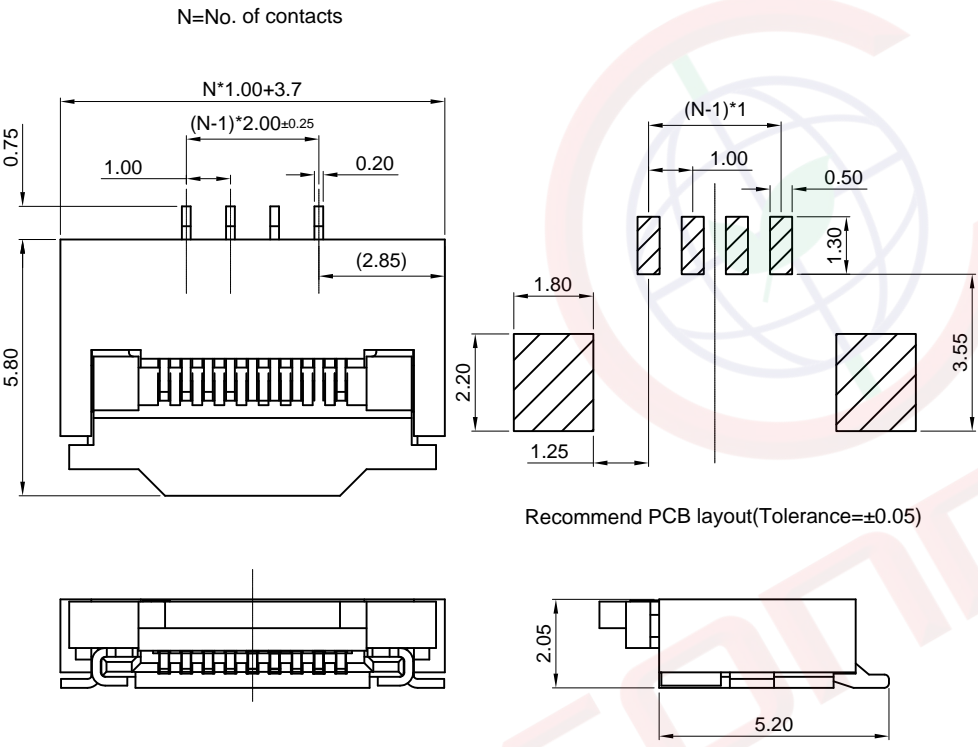

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1020-30-XXXXXX-A		

PROJECTION	TITLE
	1.00mm FPC ZIF Horizontal
UNITS	mm
SHEET SIZE	A4
SERIES	DS1020-30 SERIES

晨翔电子有限公司  
 CONNELY CONNELY ELECTRONIC CO. LTD