

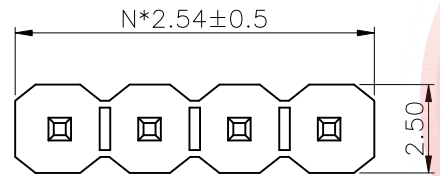


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 05/21/13'	~	LJC 05/21/13'
B	ADD PLATING LEVEL	JLZ 09/25/14'	~	LJC 09/25/14'
C	DRAWING UPDATE	JLZ 09/23/17'	~	

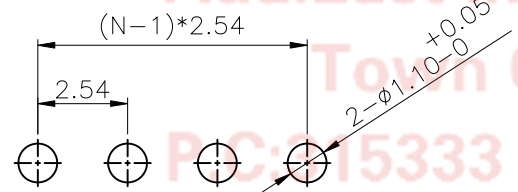

N=No. OF CONTACTS

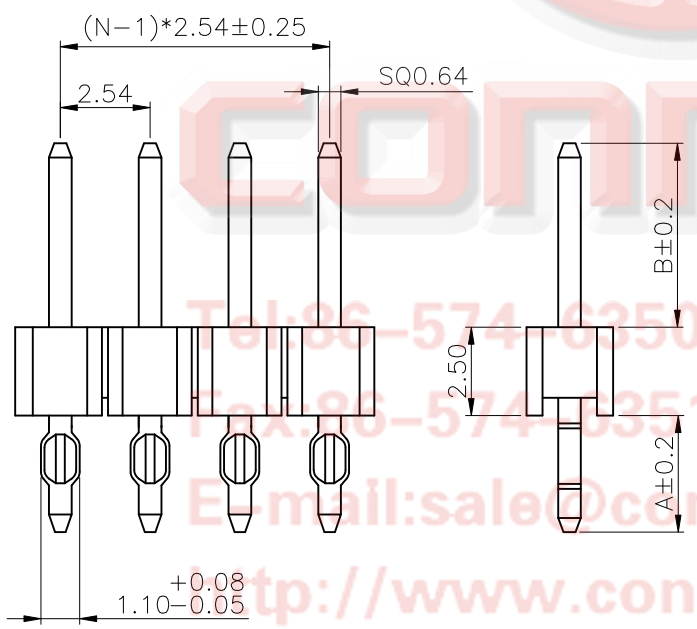

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.03)

NOTES:

- MATERIALS:
 - INSULATOR: PBT,COLOR OF BLACK. RoHS TYPE.
 - CONTACT: BRASS.
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 600V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE RANGE: -40°C~+105°C.

4. PRODUCT NUMBER CODE:

DS1021-03- X X X X - X

PLATING LEVEL(FOR GOLD ONLY)
3A: LEVEL 3A
B: LEVEL B
N: LEVEL N

TABLE A & DIM B TYPE
1: TYPE 1
2: TYPE 2
.....
or A*/B*.*

CONTACT PLATING
F1: FULL GOLD FLASH
6: FULL TIN

MOUNTING TYPE
S: Straight TYPE

No. OF CONTACTS
1*1 ~ 1*40

TABLE A:

TYPE	Dimension	
	A	B
1	3.30	5.20
2	3.30	6.80
3	3.30	8.10
4	3.30	10.20
5	3.30	13.00
6	6.50	5.20
7	6.50	6.80
8	6.50	8.10
9	6.50	10.20
10	6.50	13.00

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PIN HEADER PITCH 2.54mm	
X.	±0.60	X.	±5°	UNITS	mm		PRESS-FIT SINGLE TYPE	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1021-03 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY ELECTRONIC CO., LTD				
DRAWING TYPE		CUSTOMER						
SCALE		SHEET 1 OF 1						
DRAWING NO. C-DS1021-03-XXXX-X-C								