

Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 01/07/14'		LJC 01/07/14'
B	DRAWING UPDATE	JLZ 12/22/18'		


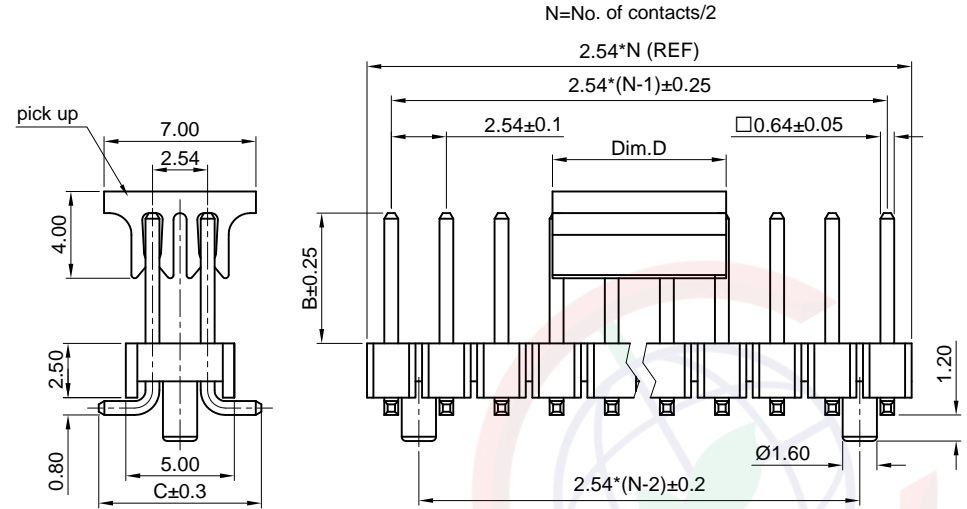


Table A:

Type	Dimension	
	B	C
1	6.00	7.50

pos.	Dim.	Dim.D
	2~8pin	
9~40pin		8.0mm

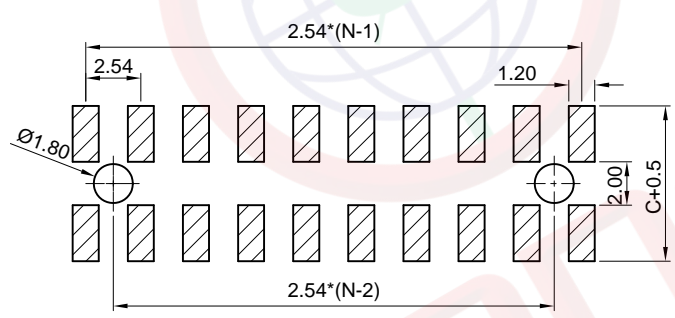

(Series Image-Reference Only)

NOTES:

- Specifications:
- Contact resistance: 20mΩ Max.
 - Insulation resistance: 1000MΩ Min.
 - Dielectric withstanding voltage: 600V AC(Rms) for 1 minute.
 - Current rating:3A.
 - Voltage rating:250V AC Rms.
 - Temperature: -40°C~+105°C.
- Materials:
- Contact material: Copper alloy.
 - Contact plating: Gold plating over nickel.
 - Insulator material: High temp,Black,UL94-V0.

Product number code:

DS1022-06- X X X X X X - X

- Plating level
- 3A:Level 3A
- B:Level B
- Packing type
- T:Tray
- R:Tape on reel
- B:Tube
- Pick up support
- S:W/ Pick up
- X:W/O Pick up
- Dim. B C type
- 1: Type 1
- or B*.*-C*.*
- Contact plating
- 8: Full gold flash
- 6: Full tin
- Mounting type
- S: SMT
- No. of contacts
- 2x2 - 2x40

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	PIN HEADER PITCH 2.54mm		
X.	±0.60	X.	±5°	UNITS	mm		SMT TYPE W/ POST		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1022-06 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER							
SCALE		1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1022-06-XXXXXX-X-B							

