

N=No.OF CONTACTS(SINGLE ROW)  
 N=No.OF CONTACTS/2(DOUBLE ROW)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/09/06'	~	LJC 04/09/06'
B	增加规格	YCH 01/26/08'	~	LJC 04/09/06'
C	修改图纸错误	YCH 06/01/09'	~	LJC 06/01/09'
D	DRAWING UPDATE	JLZ 09/18/16'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
  - CURRENT RATING: 3A.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.

3. PRODUCT NUMBER CODE:

DS1023-03- X X X

CONTACT PLATING

6: TIN

8: FULL GOLD FLASH

2: NICKEL + GOLD FLASH






MOUNTING TYPE

V: V/T TYPE

No.OF CONTACTS

1\*2~1\*40

2\*2~2\*40

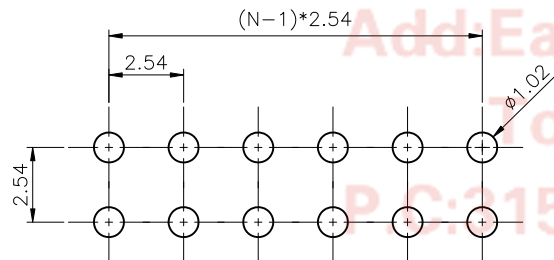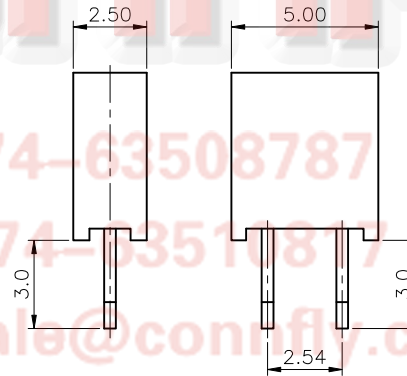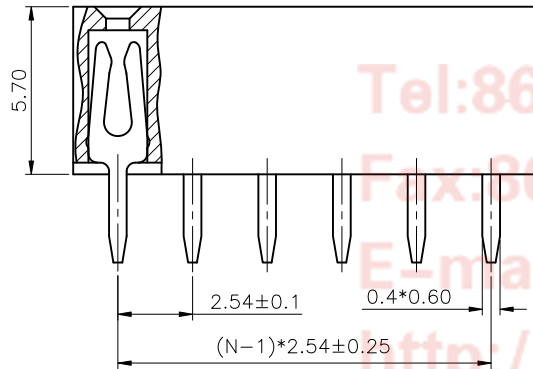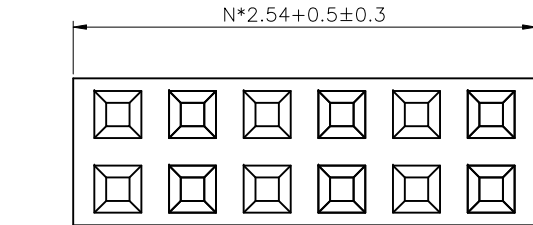

PCB LAYOUT

Tel:86-574-63508787

Fax:86-574-63518787

E-mail:sales@connfly.com

http://www.connfly.com

Add:East Industry Zone KuangYan


Town Cixi Ningbo China

P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	FEMALT HEADER PITCH	
UNITS	mm	2.54mm TYPE H=5.70mm	
SHEET SIZE	A4	SERIES	DS1023-03 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-03-XXX-D		

 **晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**