
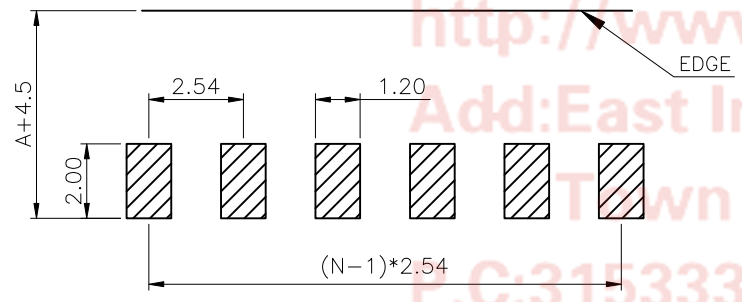
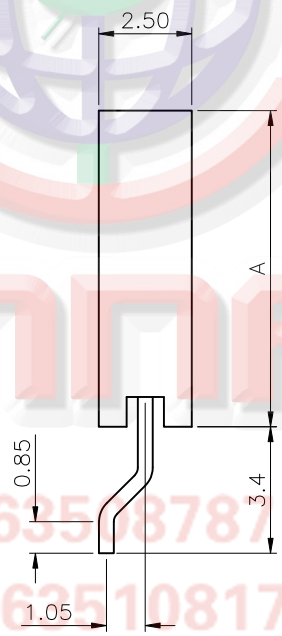
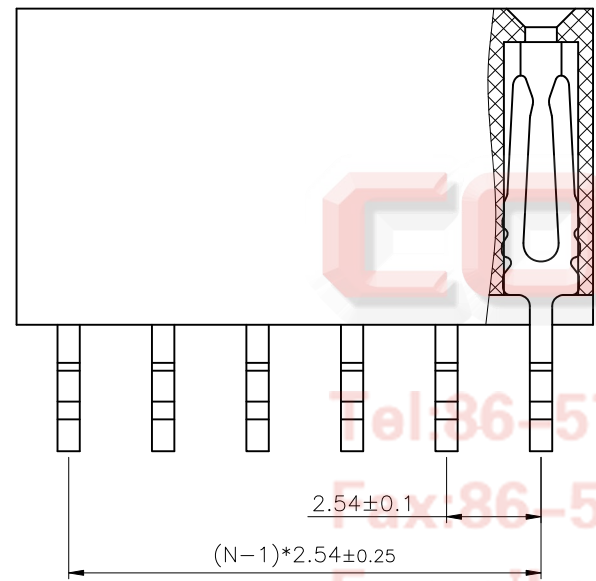


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/18/11'	~	LJC 10/18/11'
B	ADD P/N CODE	JLZ 09/22/15'	HZW 09/22/15'	LJC 09/22/15'
C	DRAWING UPDATE	JLZ 08/19/16'	~	

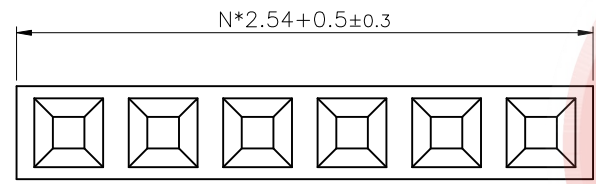

NOTES:

- MATERIAL
 - INSULATOR MATERIAL:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL:COPPER ALLOY.
- SPECIFICATION
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - TEMPERATURE: -40° to +105°C.
 - CURRENT RATING:3A.

3. PRODUCT NUMBER CODE:

DS1023-21 - X X X X X


- PACKING TYPE
T:TRAY
R:TAPE ON REEL
- PROFILE HEIGHT(DIM A)
1: 8.5mm
2: 5.0mm
- CONTACT PLATING
8: FULL GOLD FLASH
- MOUNTING TYPE (B)
S: SMT
- No.OF CONTACTS
1*2~1*40

Tel:86-574-63510817
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	FEMALE HEADER PITCH	
mm		2.54mm SMT SINGLE ROWS TYPE	
SHEET SIZE	SERIES	DS1023-21 SERIES	

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1023-21-XXXX-C		

 **晨翔电子有限公司**
CONNFLY CONNFLY ELECTRONIC CO. LTD