


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/22/09'	~	

N=NUMBER OF CONTACTS/2


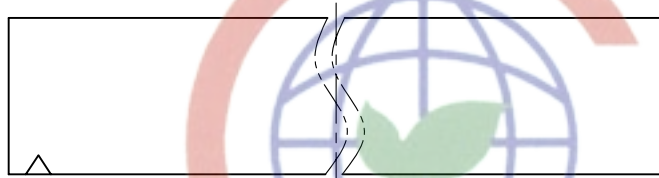


NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1024-05
- PRODUCT NUMBER CODE:

DS1024-05 - X X X X

- X HOUSING COLOR
B:BLACK
- X CONTACT PLATING
8: FULL GOLD FLASH
- X CONNECTOR TYPE
S:SOCKET
- X No.OF CONTACTS
2*1-2*40

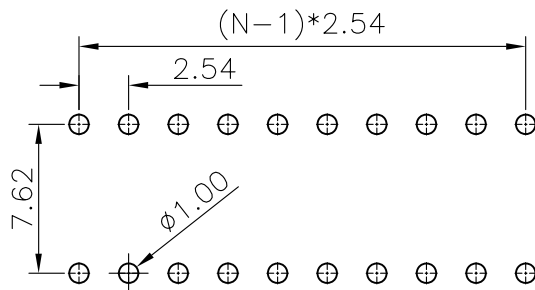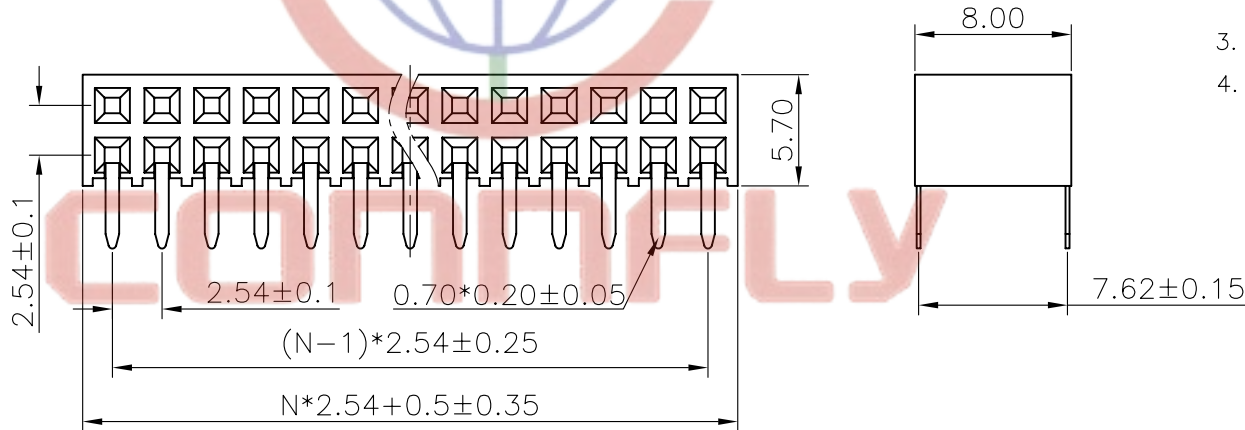

(TOLERANCE=±0.05)
RECOMMEND PCB LAYOUT

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm FEMALE HEADER
X.	±0.60	X.	±5'	UNITS	mm	SHEET	1 OF 1
.X	±0.38	.X	±3'	SHEET SIZE	A4	SERIES	DS1024-05 SERIES
.XX	±0.25	.XX	±2'				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		1:1					
DRAWING NO.		C-DS1024-05-XXXX					