

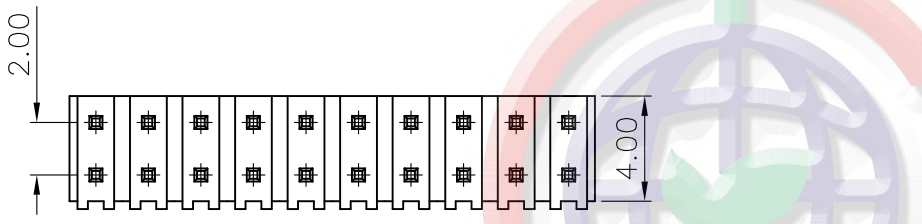


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/11/14'	~	

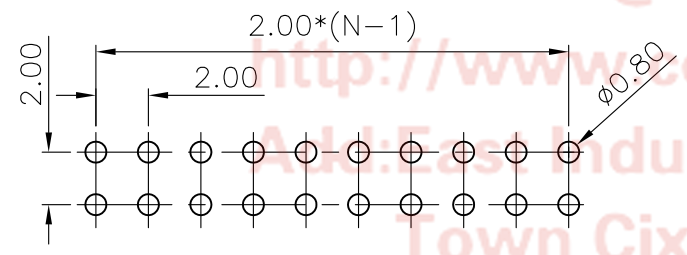

N=No.OF CONTACTS/2

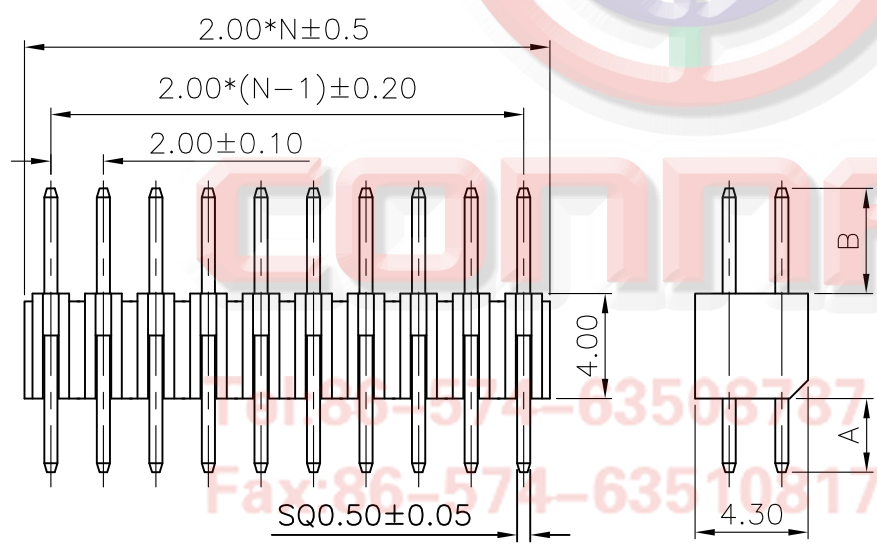

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)


NOTES:

- MATERIAL
 - INSULATOR: THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING: 1.5 Amp.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - DIELECTRIC WITHSTANDING: 500VAC.
 - CONTACT RESISTANCE: 20mΩ Max.
 - OPERATING TEMPERATURE: -40°C TO +105°C.
- PRODUCT NUMBER CODE:

DS1025-13 - X X X X X X - X

TABLE A:

TYPE	Dimension	
	A	B
1	2.80	4.00
2		
3		
4		
5		
6		
7		
8		
9		

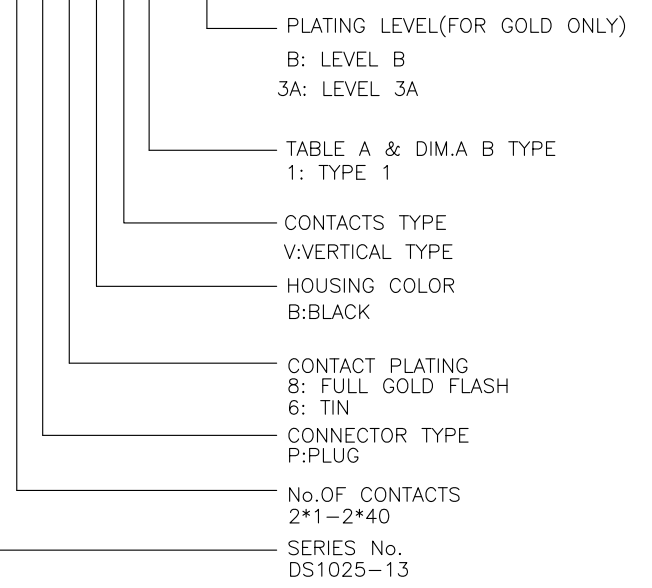

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	2.0mm PITCH PIN HEADER DUAL ROW STRAIGHT H=4.0mm
X. ±0.60	X. ±5°	UNITS	mm		
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	DS1025-13 SERIES
.XX ±0.25	.XX ±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER				
SCALE	1:1 SHEET 1 OF 1				
DRAWING NO.	C-DS1025-13-XXXXXX-X-A				