

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 09/06/08'	~	LJC 09/06/08'
B	整理图面	YCH 10/08/08'	~	LJC 10/08/08'
C	整理图面	YCH 11/01/08'	~	

NOTES:

1. ELECTRICAL CHARACTERISTICS:

1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.

1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms)
FOR 1 MINUTE.

1.3 INSULATION RESISTANCE: 1000MΩ Min.

2. ENVIRONMENT CHARACTERISTICS:

2.1 OPERATING TEMPERATURE: -40°C~+105°C.

3. PART NUMBER: DS1026-03

4. PRODUCT NUMBER CODE:

DS1026-03 - X X X X X X X

POST SUPPORT
S:W/ POST
X:W/O POST

PACKING TYPE
T:TRAY
R:TAPE ON REEL
B:TUBE





PICK UP SUPPORT
S:W/ PICK UP
X:W/O PICK UP

BEND TYPE
1: R1 TYPE
2: R2 TYPE

HOUSING COLOR
B:BLACK


CONTACT PLATING
8: FULL GOLD FLASH

No.OF CONTACTS
1*1-1*40

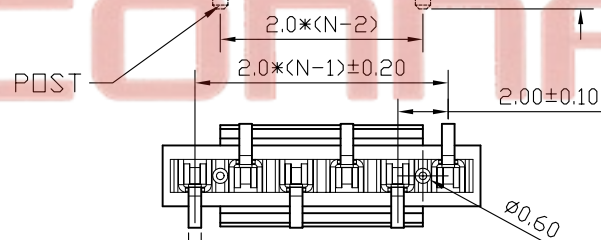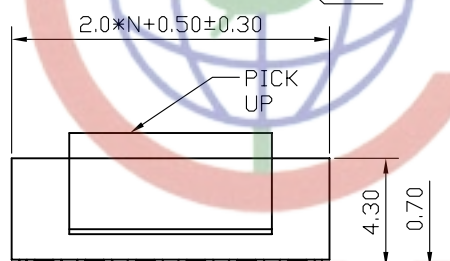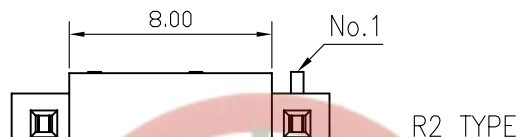

0.50*0.20±0.03

N:NUMBER OF CONTACTS

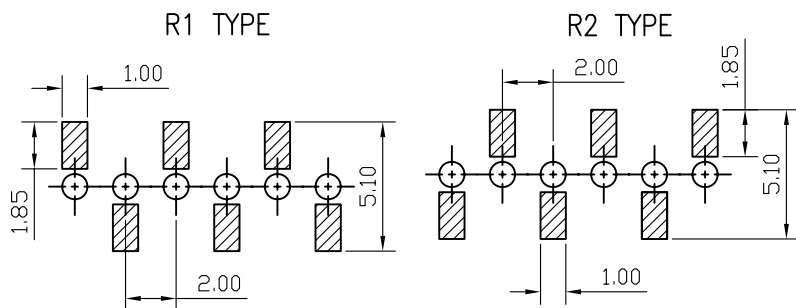

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	2.0 Pitch Female Header Single Row SMT Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1026-03 SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1026-03-XXXXXX						