

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.



1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 07/27/10'		LJC 07/27/10'
B	DRAWING UPDATE	JLZ 08/19/16'	HZW 08/19/16'	LJC 08/19/16'
C	DRAWING UPDATE	JLZ 08/01/18'		



N=No.OF CONTACTS/2



W/ PICK UP
SCALE 1:2

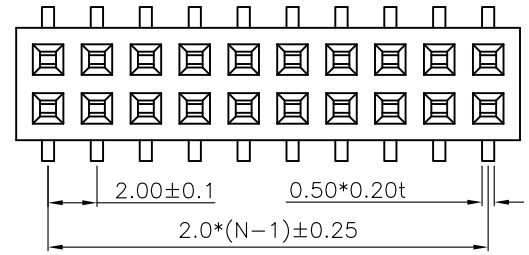

W/ MYLAR
SCALE 1:2

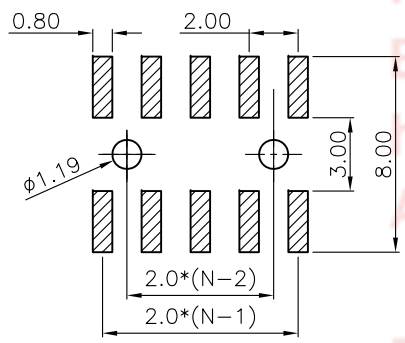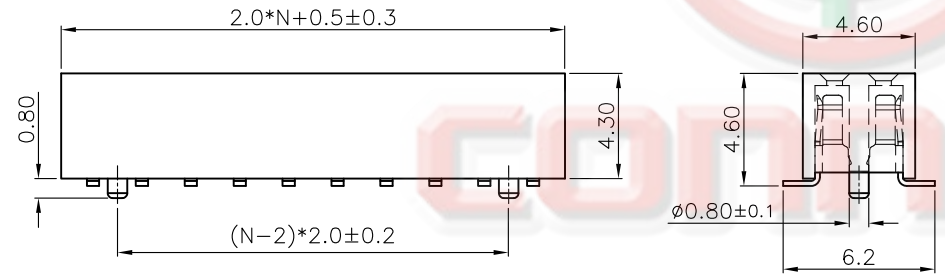

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
 - PART NUMBER: DS1026-07
 - PRODUCT NUMBER CODE:
DS1026-07 - X X X X X X X X
- PICK UP SUPPORT
S:W/ PICK UP
X:W/O PICK UP
M:W/ MYLAR
 - PACKING TYPE
B:TUBE
R:TAPE ON REEL
 - POST SUPPORT
S:W/ POST
X:W/O POST
 - CONTACTS TYPE
S:SMT
 - HOUSING COLOR
B:BLACK
 - CONTACT PLATING
8: FULL GOLD FLASH
 - CONNECTOR TYPE
S:SOCKET
 - No.OF CONTACTS
2x2-2x40

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		2.00mm Female Header Double Row SMT W/ Post Type
.X	±0.38	.X	±3°	mm	
.XX	±0.25	.XX	±2°	A4	SERIES DS1026-07 SERIES
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD	
SCALE		SHEET			
DRAWING NO.		1 OF 1			
		C-DS1026-07-XXXXXXXXX-C			

1 2 3 4 5 6 7 8