
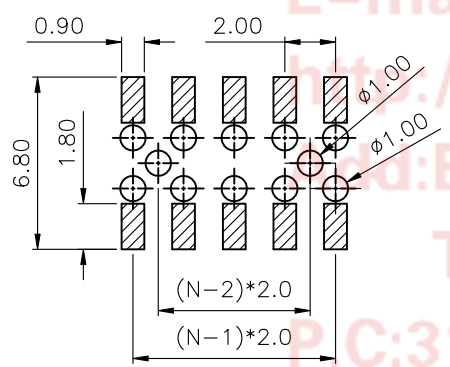
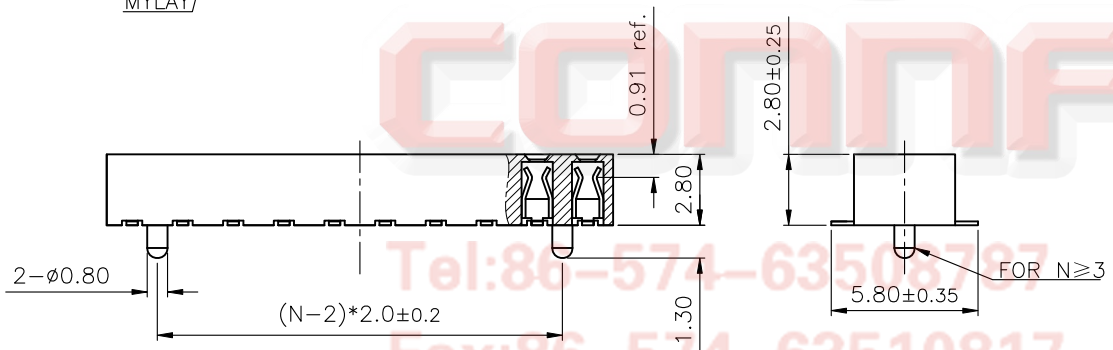


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		LJC 06/22/05'
B	ADD P/N CODE	JLZ 03/19/16'	HZW 03/19/16'	LJC 03/19/16'
C	DRAWING UPDATE	JLZ 11/29/16'		
D	ADD P/N CODE	JLZ 12/13/16'		

N=NUMBER OF CONTACTS/2

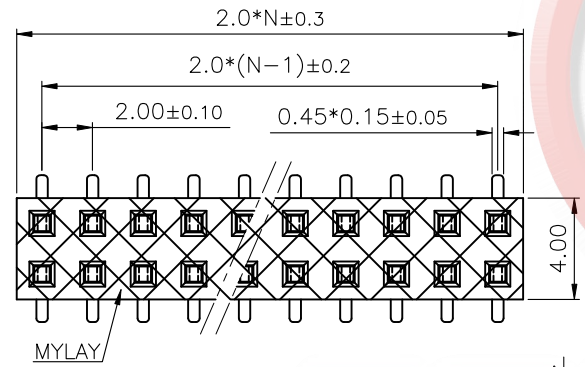

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

NOTES:

- MATERIALS:
 - CONTACT: COPPER ALLOY.
 - INSULATOR: HIGH TEMPERATURE PLASTIC,UL94 V-0 RATED
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - CURRENT RATING:1.5A.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: -40°C~+105°C.
 - RECOMMEND SOLDERING HEAT:260°C,3~5s.
- PACKING TYPE: TAPE ON REEL OR TUBE.
- PRODUCT NUMBER CODE:

DS1026-08 - X X X X X X X X - X

- PEG SUPPORT
- X: W/O PEG
- N/A: W/ PEG
- PICK UP SUPPORT
- P:PICK UP
- M:MYLAY
- N/A:W/O MYLAY/PICK UP (FOR TUBE PACKING ONLY)
- PACKING TYPE
- R:TAPE ON REEL
- B:TUBE
- CONTACTS TYPE
- S:SMT
- HOUSING COLOR
- B:BLACK
- CONTACT PLATING
- 8: FULL GOLD FLASH
- CONNECTOR TYPE
- S:SOCKET
- No.OF CONTACTS
- 2*2~2*40

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1026-08-XXXXXX-X-D		

PROJECTION		TITLE	DUAL ROW W/N LOCATE PEG S.M.T	
UNITS	mm	SERIES	DS1026-08 SERIES	
SHEET SIZE	A4			

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

CONNFLY
 Tel:86-574-63508797
 Fax:86-574-63510817
 E-mail:sale@connfly.com
<http://www.connfly.com>
 East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333