





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/22/05'		LJC 06/22/05'
B	DRAWING UPDATE	JLZ 12/31/16'		

N: NUMBER OF CONTACTS/2

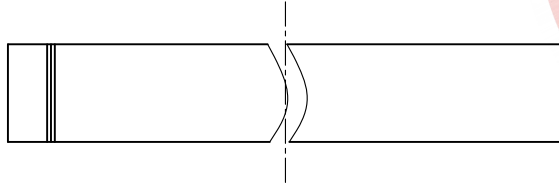

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1026-12
- PRODUCT NUMBER CODE: DS1026-12 - X X X X X

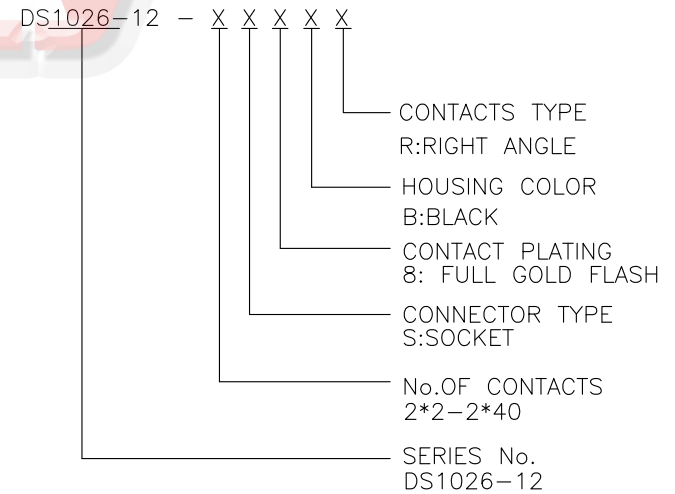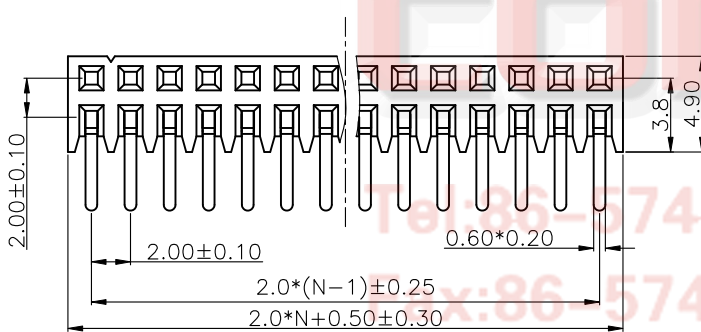

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SIDE ENTRY RIGHT ANGLE		
X.	±0.60	X.	±5°	UNITS	mm				
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1026-12 SERIES		
.XX	±0.25	.XX	±2°						
DRAWING TYPE				CUSTOMER					
SCALE		1:1		SHEET		1 OF 1			
DRAWING NO.				C-DS1026-12-XXXXX-B					

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD