

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 08/16/07'		

NOTES:

1. SPECIFICATION:

- 1.1 CONTACT RESISTANCE: 30mΩ MAX.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 500MΩ Min.
- 1.4 OPERATING TEMPERATURE: -20°C~+80°C.

2. PRODUCT NUMBER CODE:

DS1027-02 - X X X X X

PROFILE HEIGHT(DIM A):
0:6.0mm


CONTACT PLATING:
F1: FULL GOLD FLASH
N: NICKEL
2: GOLD+NICKEL

HOUSING COLOR:
B: BLACK U:BLUE Y:YELLOW
W: WHITE E:GREEN R:RED


HOUSING TYPE:
A:OPEN
B:CLOSE

No.OF PORTS:
3: 3ports 8: 8ports
4: 4ports 9: 9ports
5: 5ports 10: 10ports
6: 6ports
7: 7ports


SERIES No:
DS1027-02

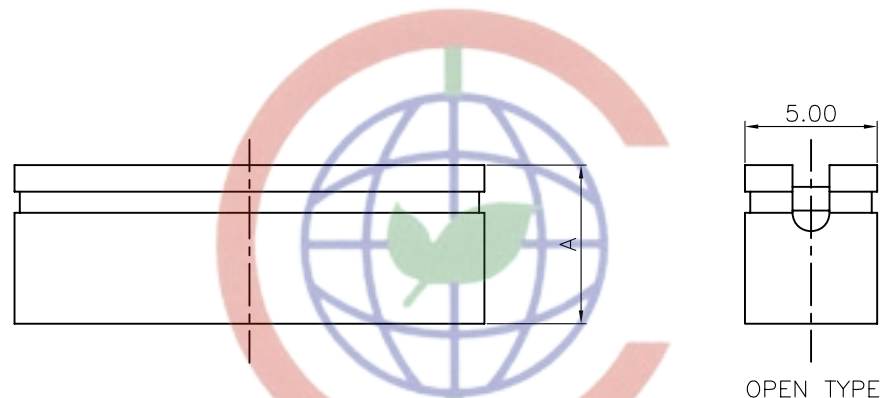

OPEN TYPE

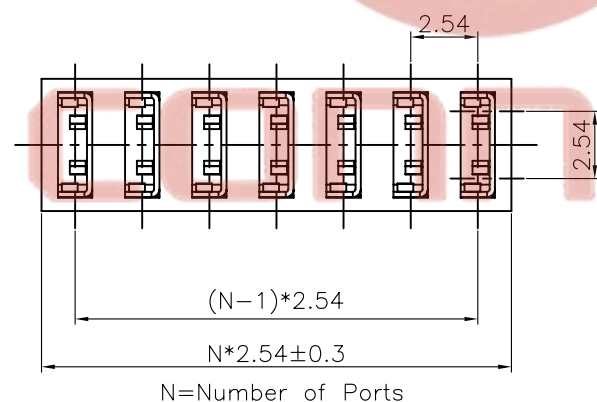

CLOSE TYPE

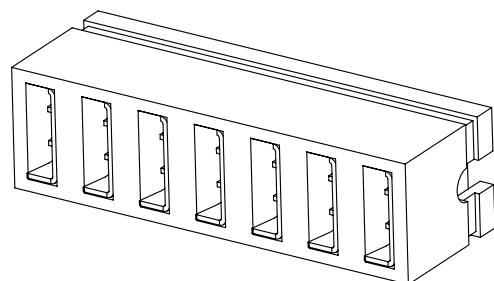

Tel: 86-574-63508787

Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		2.54mm pitch MINI JUMPER Stack type 3-10 ports	
X.	±0.60	X.	±5°	UNITS		mm			
.X	±0.38	.X	±3°	SHEET SIZE		A4		SERIES DS1027-02 SERIES	
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER		 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
SCALE		1:1	SHEET 1 OF 1						
DRAWING NO.		C-DS1027-02-XXXXX							



晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD